



中空玻璃加工设备专业制造商
Professional Manufacturer of Insulating Glass Processing Equipments

山东阅航环保科技有限公司
SHANDONG YUEHANG ECO TECHNOLOGY CO., LTD.



专业制造每一件产品 · 用心服务每一位用户
Specializing In Manufacturing Each Product, Attentive To Serve Every User

牌，以品牌促发展。

，使员工自豪，让社会敬仰。

精益求精。


价值，为企业赢得未来！

负重领先，默契信任，风险共担。

细化、零缺陷。

现企业与员工的价值；

效益、促进企业发展的同时，

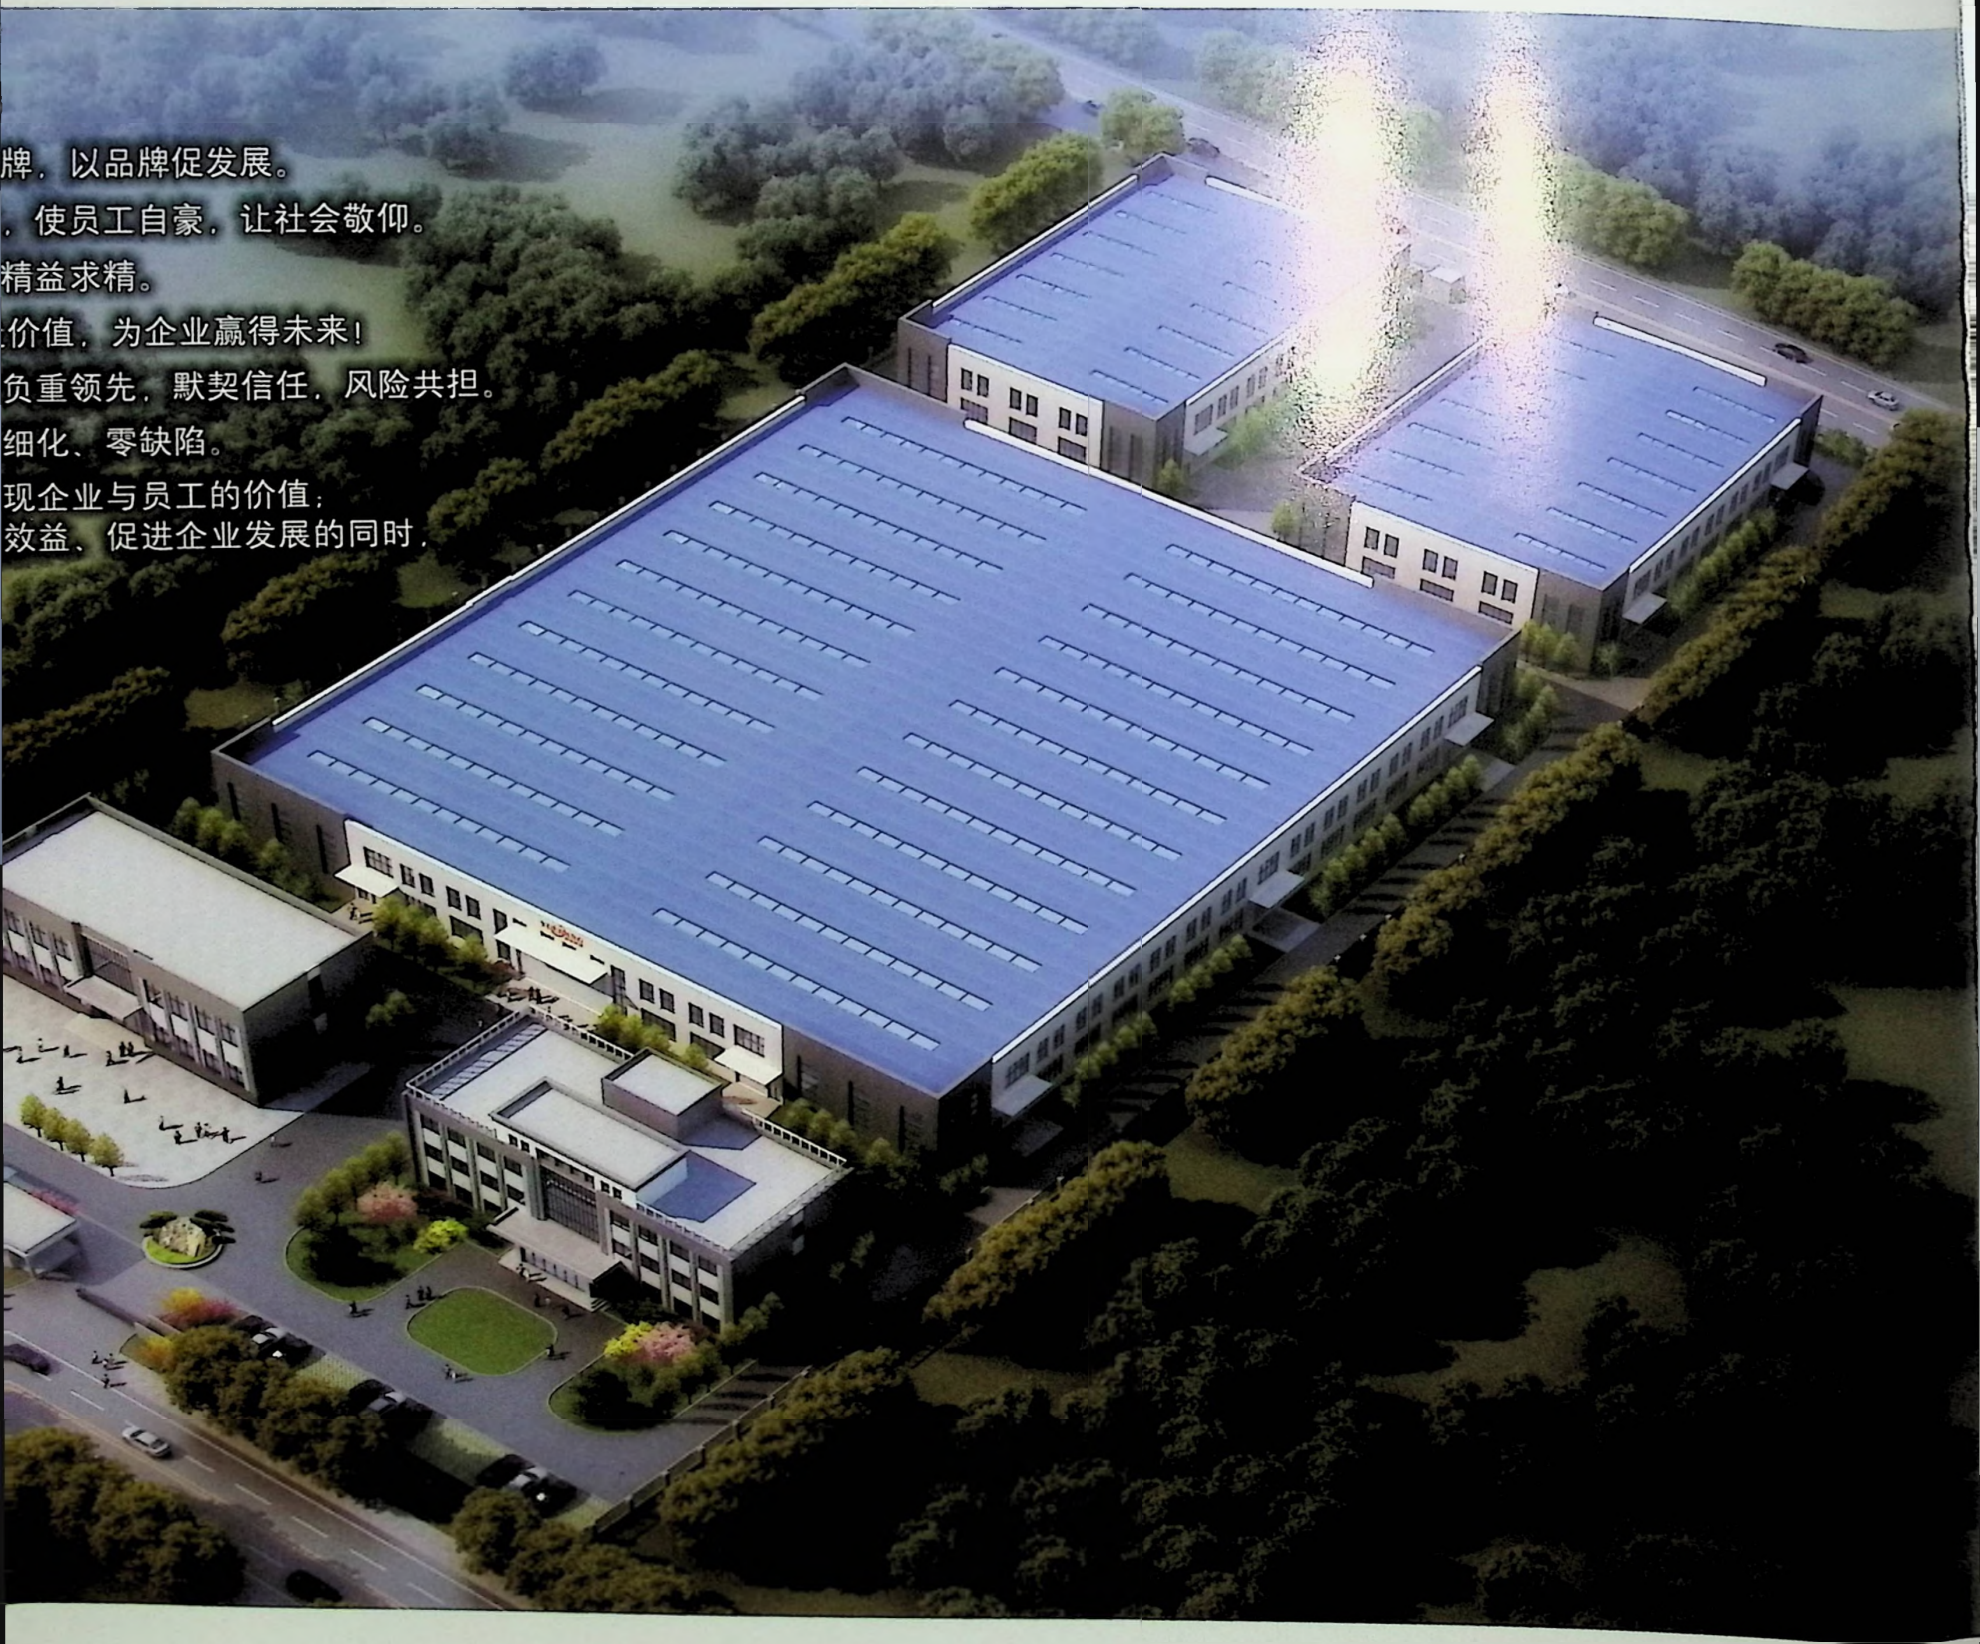

企业概述 Company profile

山东阅航环保科技有限公司是山东省高新技术企业、中空玻璃加工设备的专业制造商。公司专注于中空玻璃设备的设计、研发与制造，可提供适合用户需求的中空玻璃加工设备。公司的核心产品是充气中空玻璃生产线、全自动中空玻璃打胶机，该设备大大提高了玻璃深加工企业的生产效率及在同行业中的竞争力、降低人工成本；公司拥有专业的研发队伍和强大的技术力量，所生产的产品运行平稳性强，使用过程稳定性高，设备操作简单易学，能够满足不同客户实际操作需求。

公司创办初始，管理、设计、生产、制造、销售、服务严格遵循现代化的企业管理机制和规范运作模式，为公司高起点介入、高标准运作的发展理念打下坚实的基础，公司始终信奉质量第一、用户至上的原则，在保证质量的同时，不断深入市场与用户交流，聆听用户建议，关注用户需求，在产品制造方面始终以客户的需求为中心，做最适合市场需求的产品。


Shandong Yuehang ECO Technology Co., Ltd. is a high-tech enterprise in Shandong province, is a professional manufacturer of insulating glass processing equipment. The company focuses on the design, research and development and manufacturing of insulating glass processing equipment. The key products of the company are insulating glass argon gas filling production line, automatic insulating glass sealing robot, which greatly improves the production efficiency of glass deep processing enterprises and the competition in the same industry, reduce labor costs; The company has its own R & D team and a strong technical group, the production of products running stable, high stability in the process of use, equipment operation is simple and easy to learn, to meet the actual operation needs of different customers.

Company establishes the initial, management, design, production, manufacture, sales, service, strictly follow the modern enterprise management mechanism and standardize the operation mode, high involvement in starting point, high standard operation for the company's development idea to lay a solid foundation, the company always believes in the principle of quality first, customer supreme, in quality assurance at the same time, deepening the market with the user communication, listen to user Suggestions, focus on user needs, in product design and manufacturing has always been to customer demand as the center, make the products suitable for the market demand.



全伺服智能充气中空玻璃生产线


FULL SERVO INTELLIGENT ARGON GAS FILLING INSULATING GLASS PRODUCTION LINE

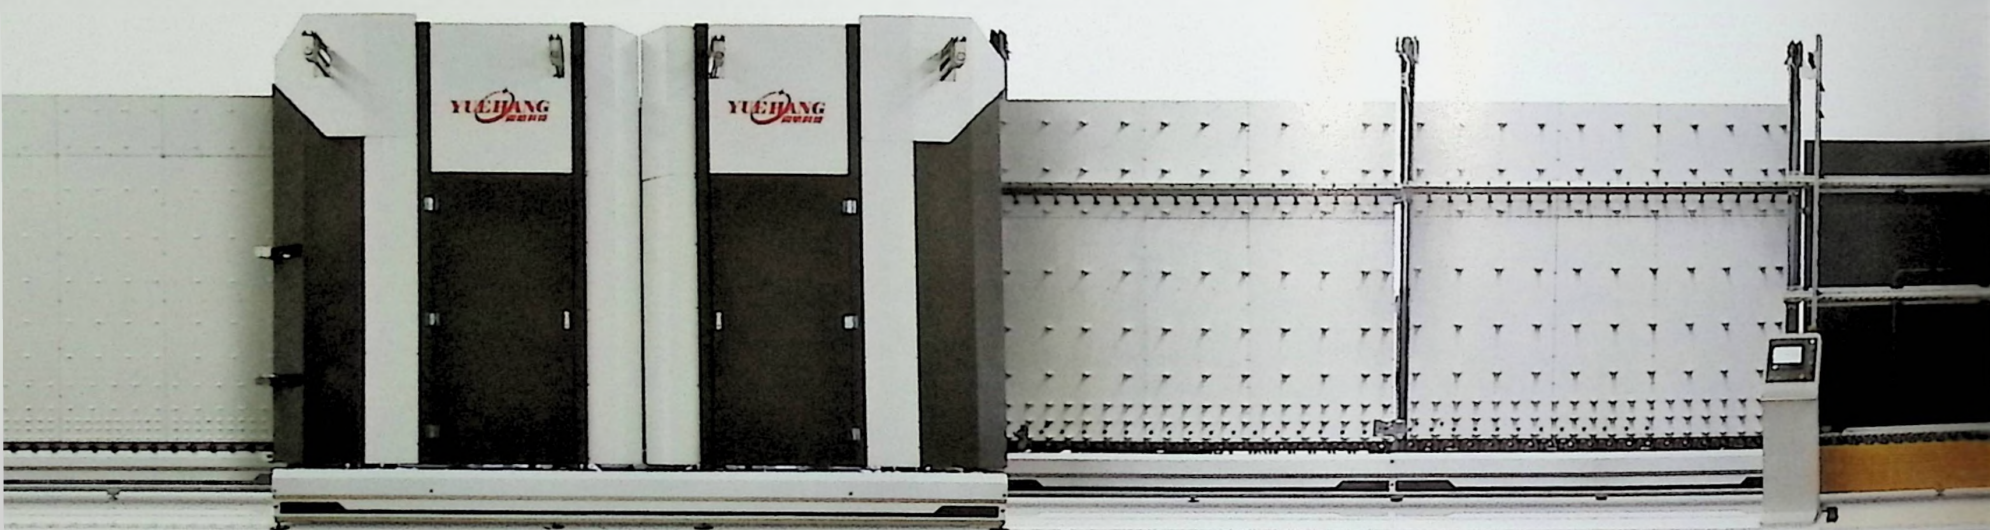

CHARACTERISTICS


，操作更便捷、直观。
三玻璃。
能稳定，适用寿命长。
测玻璃洁净度。
准确，减少劳动力，
为充气提供准确数据。
氩气）。
无痕中空玻璃的生产。




- PLC control, touch sensitive screen human-machine interface, operation is more convenient and intuitive.
- The production line automatically recognise coated glass and LOW-E glass.
- The upper part of the cleaning box is connected by a bevel gear, which has stable performance and long service life.
- The light tubes are distributed reasonably, segmented control, better detection of glass cleanliness.
- The aluminum spacer positioning adopts unique design, accurate positioning, reduced labor, automatically accurate detection of glass height and thickness to provide accurate data for in-panel inflation.
- Can filling argon gas for single chamber or double chamber glasses.
- Servo positioning, full beam design, truly achieve the production of traceless insulating glass.

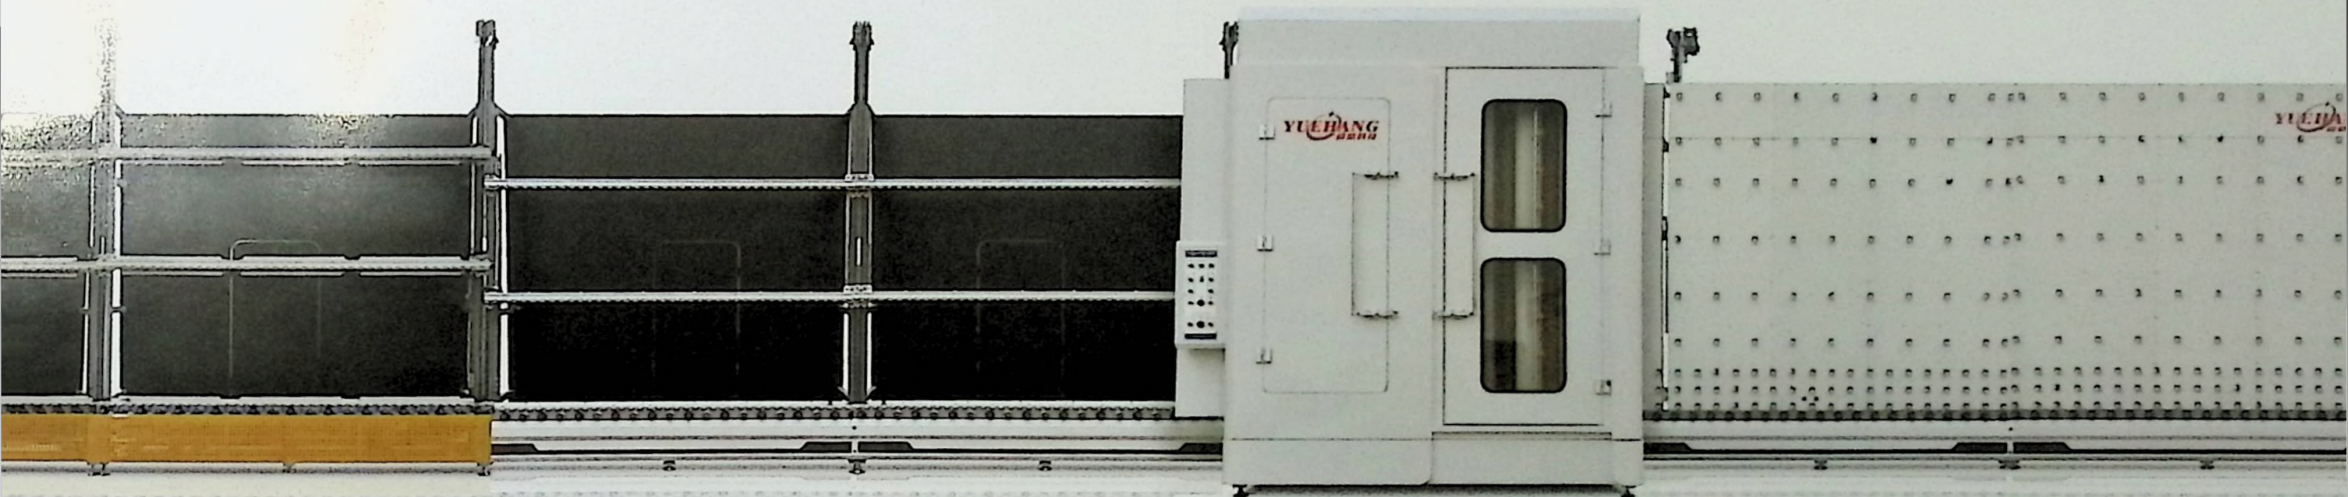

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	玻璃清洗速度 Cleaning Speed	外形尺寸 Overall Dim
YH-CQX-3000×6000-A	380V 50Hz 62KW	0.6~0.8Mpa	3000×6000mm	260×450mm	3~12mm	≤80mm	2~12m/min	44800×2500×
YH-CQX-2800×6000-A	380V 50Hz 62KW	0.6~0.8Mpa	2800×6000mm	260×450mm	3~12mm	≤80mm	2~12m/min	44800×2500×

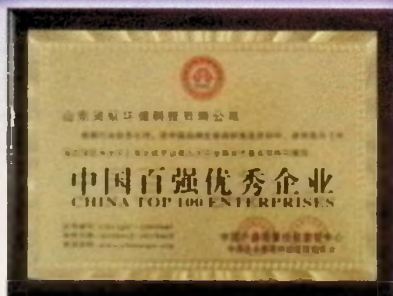

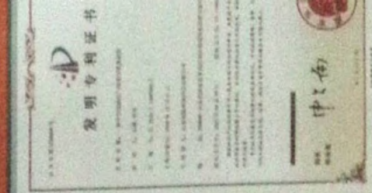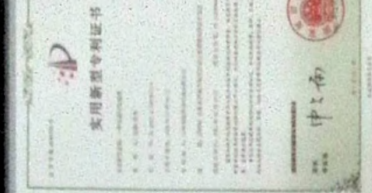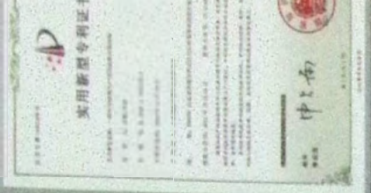

自动标准充气中空玻璃生产线

AUTOMATIC ARGON GAS FILLING INSULATING GLASS PRODUCTION LINE




特点

● PLC控制系统，触摸屏人机界面，操作更便捷、直观。
 ● 生产线可自动识别镀膜玻璃和LOW-E玻璃。
 ● 主箱上部全部采用伞齿轮连接，性能稳定，适用寿命长。
 ● 分布合理，分段控制，更好的检测玻璃洁净度。
 ● 每条定位处采用独特的设计，定位精确，减少劳动力，
 为精准检测玻璃高度和厚度，为板内充气提供准确数据。
 ● 对单层、双层中空玻璃进行充气（氩气）。
 ● 内外合片均能生产等片单层、双层中空玻璃，效率高。
 ● 精准定位，全横梁设计，真正做到了无痕中空玻璃的生产。

CHARACTERISTICS

- PLC control, touch sensitive screen human-machine Interface, operation is more convenient and intuitive.
- The production line automatically recognise coated glass and LOW-E glass.
- The upper part of the cleaning box is connected by a bevel gear, which has stable performance and long service life.
- The light tubes are distributed reasonably, segmented control, better detection of glass cleanliness.
- The aluminum spacer positioning adopts unique design, accurate positioning, reduced labor, automatically accurate detection of glass height and thickness to provide accurate data for in-panel inflation.
- Can filling argon gas for single chamber or double chamber glasses.
- Both inner-panel assembly and out-panel assembly function can process same edge double layers and triple layers.
- Servo positioning, full beam design, truly achieve the production of traceless insulating glass.

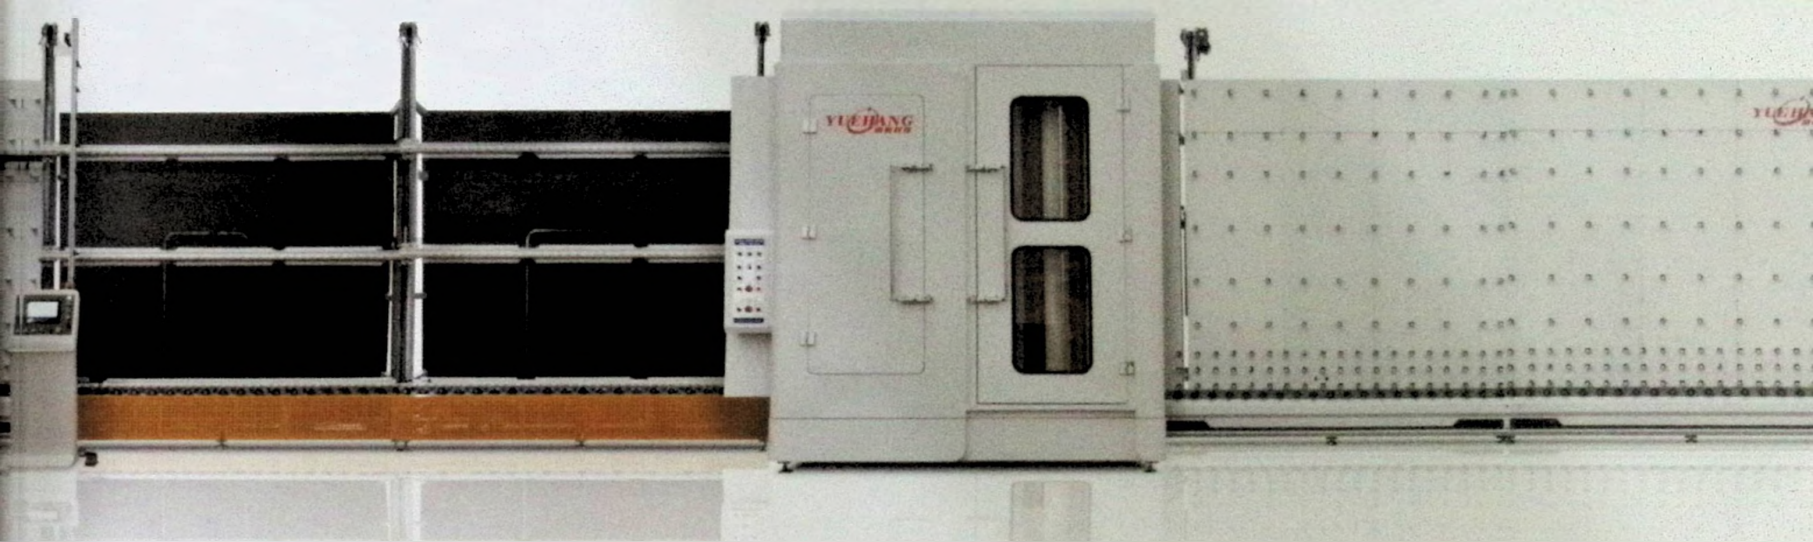


技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	玻璃清洗速度 Cleaning Speed	
YH-CQX-3000×6000-B	380V 50Hz 59KW	0.6~0.8Mpa	3000×6000mm	260×450mm	3~12mm	< 80mm	2~12m/min	3~
YH-CQX-2800×6000-B	380V 50Hz 59KW	0.6~0.8Mpa	2800×6000mm	260×450mm	3~12mm	< 80mm	2~12m/min	3~

伺服横梁充气中空玻璃生产线

SERVO BEAM ARGON GAS FILLING INSULATING GLASS PRODUCTION LINE

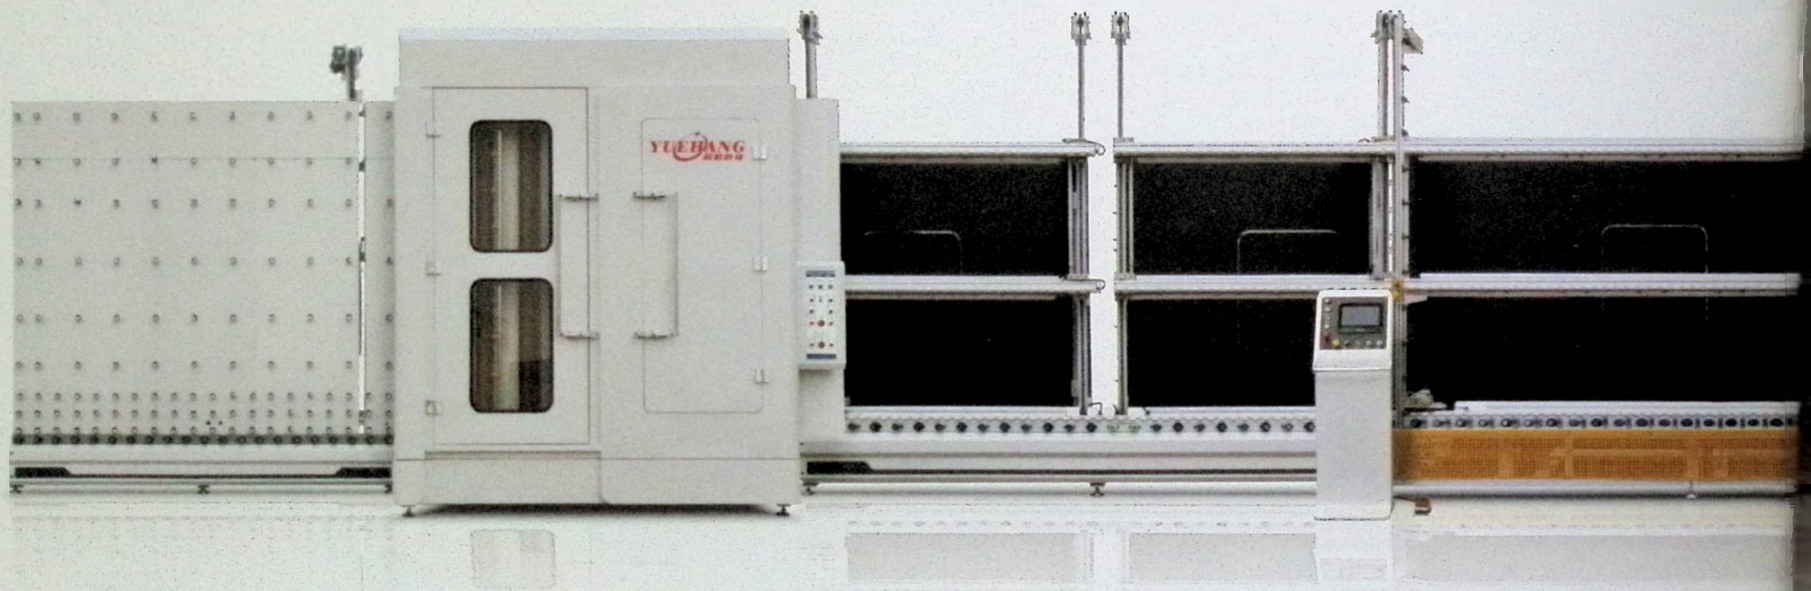


特点

采用PLC控制系统，触摸屏人机界面，操作更便捷、直观。
生产线可自动识别镀膜玻璃和LOW-E玻璃。
清洗箱上部全部采用伞齿轮连接，性能稳定，适用寿命长。
光管分布合理，分段控制，更好的检测玻璃洁净度。
铝条定位处采用独特的设计，定位准确，减少劳动力，
能精准检测玻璃高度和厚度，为板内充气提供准确数据。
可对单层、双层中空玻璃进行充气（氩气）。
精准定位，全横梁设计，真正做到了无痕中空玻璃的生产。

CHARACTERISTICS

- PLC control, touch sensitive screen human-machine interface, operation is more convenient and intuitive.
- The production line automatically recognise coated glass and LOW-E glass.
- The upper part of the cleaning box is connected by a bevel gear, which has stable performance and long service life.
- The light tubes are distributed reasonably, segmented control, better detection of glass cleanliness.
- The aluminum spacer positioning adopts unique design, accurate positioning, reduced labor, automatically accurate detection of glass height and thickness to provide accurate data for in-panel inflation.
- Can filling argon gas for single chamber or double chamber glasses.
- Servo positioning, full beam design, truly achieve the production of traceless insulating glass.

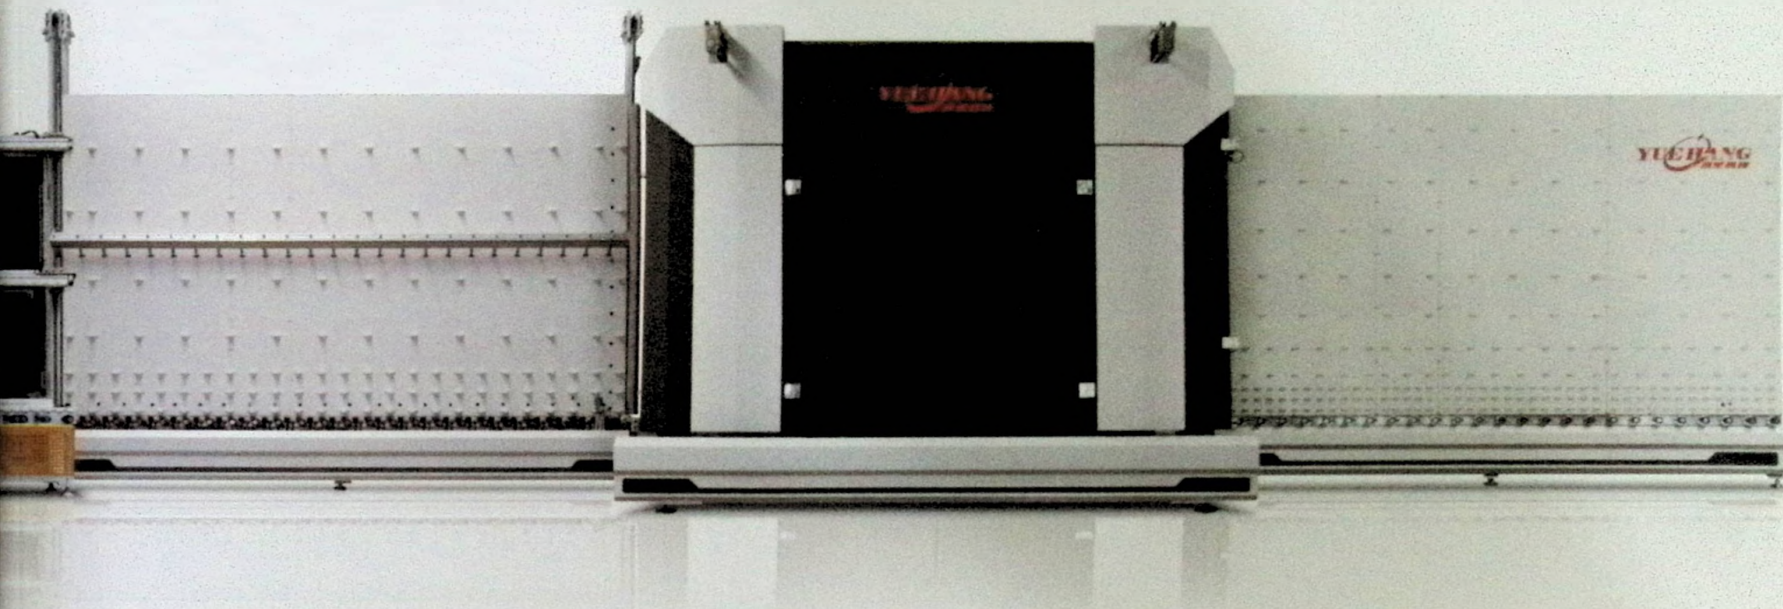


技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	玻璃清洗速度 Cleaning Speed	
YH-HLCQX-2500×4000	380V 50Hz 50KW	0.6~0.8Mpa	2500×4000mm	260×450mm	3~12mm	≤80mm	2~12m/min	28
YH-HLCQX-2500×3500	380V 50Hz 50KW	0.6~0.8Mpa	2500×3500mm	260×450mm	3~12mm	≤80mm	2~12m/min	25

自动双工位充气中空玻璃生产线

AUTOMATIC DOUBLE-POSITION INSULATING GLASS ARGON GAS FILLING PRODUCTION


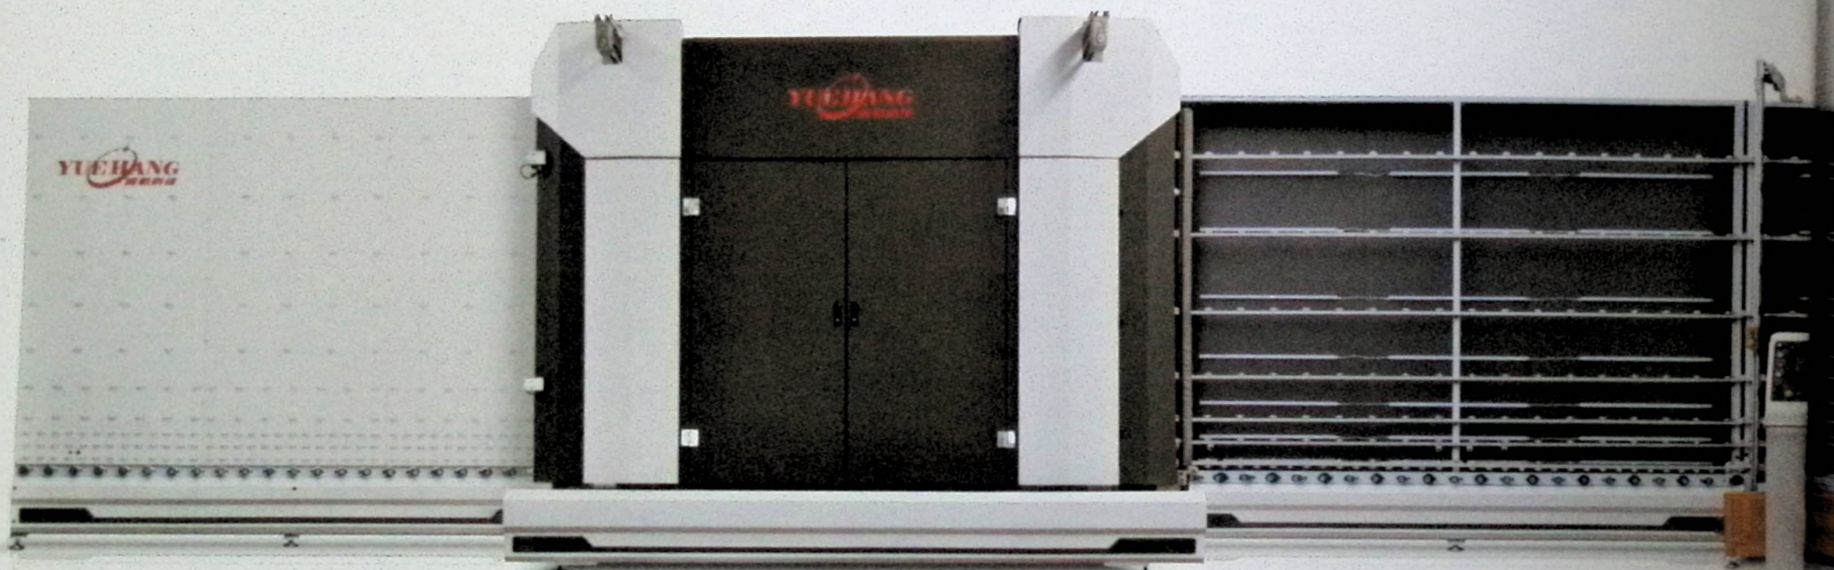


设备特点

- 全程PLC控制系统，触摸屏人机界面，操作更便捷、直观。
- 生产线可自动识别镀膜玻璃和LOW-E玻璃。
- 清洗箱上部全部采用伞齿轮连接，性能稳定，适用寿命长。
- 灯管分布合理，分段控制，更好的检测玻璃洁净度。
- 铝隔条定位处采用独特的设计，定位准确，减少劳动力，自动精准检测玻璃高度和厚度，为板内充气提供准确数据。
- 可对单层、双层中空玻璃进行充气（氩气）。

CHARACTERISTICS

- PLC control, touch sensitive screen human-machine interface, operation is more convenient and intuitive.
- The production line automatically recognise coated glass and LOW-E glass.
- The upper part of the cleaning box is connected by a bevel gear, which has stable performance and long service life.
- The light tubes are distributed reasonably, segmented control, better detection of glass cleanliness.
- The aluminum spacer positioning adopts unique design, accurate positioning, reduced labor, automatically accurate detection of glass height and thickness to provide accurate data for In-panel inflation.
- Can filling argon gas for single chamber or double chamber glasses.

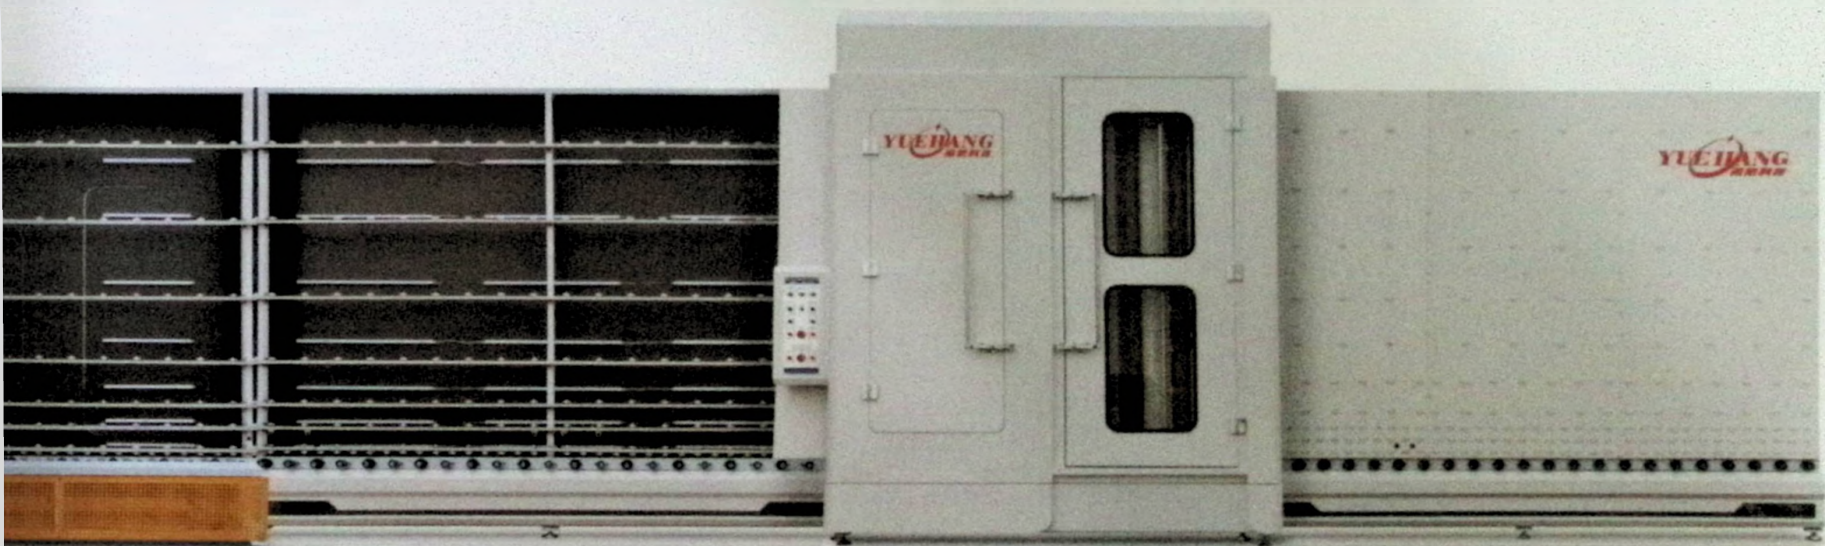

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	玻璃清洗速度 Cleaning Speed	Over
YH-SGWCQX-2500×4000	380V 50Hz 39KW	0.6~0.8Mpa	2500×4000mm	260×450mm	3~12mm	≤ 80mm	2~12m/min	2815
YH-SGWCQX-2500×3500	380V 50Hz 39KW	0.6~0.8Mpa	2500×3500mm	260×450mm	3~12mm	≤ 80mm	2~12m/min	2530




设备特点

- 可做双层中空玻璃（三玻两腔）、镀膜中空玻璃、钢化中空玻璃、LOW-E中空玻璃等高档中空玻璃制品。
- 整机采用立式倾斜机构，传送平稳、PLC控制、触摸屏显示和调节、关键部分自动检控。
- 该设备能够完成如下功能：玻璃传送、玻璃清洗、干燥、检测、铝框定位、自动外合片、板压、中空玻璃出片等。
- 同时还自动监视设备本身的工作状况，以控制设备避免发生故障，保证了产品质量，提高了安全性能。
- 该生产线具有高效、节能、安全、易操作、占地少、美观大方等特点，是目前中空玻璃制造的最佳设备。

CHARACTERISTICS

- Available for processing double insulation glass (triple glass with doubleInsulation), coating insulating glass, tempered insulating glass, Low-E insulating glass etc.
- The machine adopts inclined structure, stable conveying, PLC controlling, touching screen display and switch, key components automatic detection.
- The equipment could complete functions of: glass conveying, glass washing, drying testing, spacer positioning, auto external assembling, plate pressing, insulating glass discharging etc.
- And automatic self monitoring working situation, so as to control equipment and avoid fault: ensure product quality, improve safe performance.
- The production line is high efficient, energy saving, safe, easily operated, less occupied space, beautiful, and is the best equipment for insulating glass production.

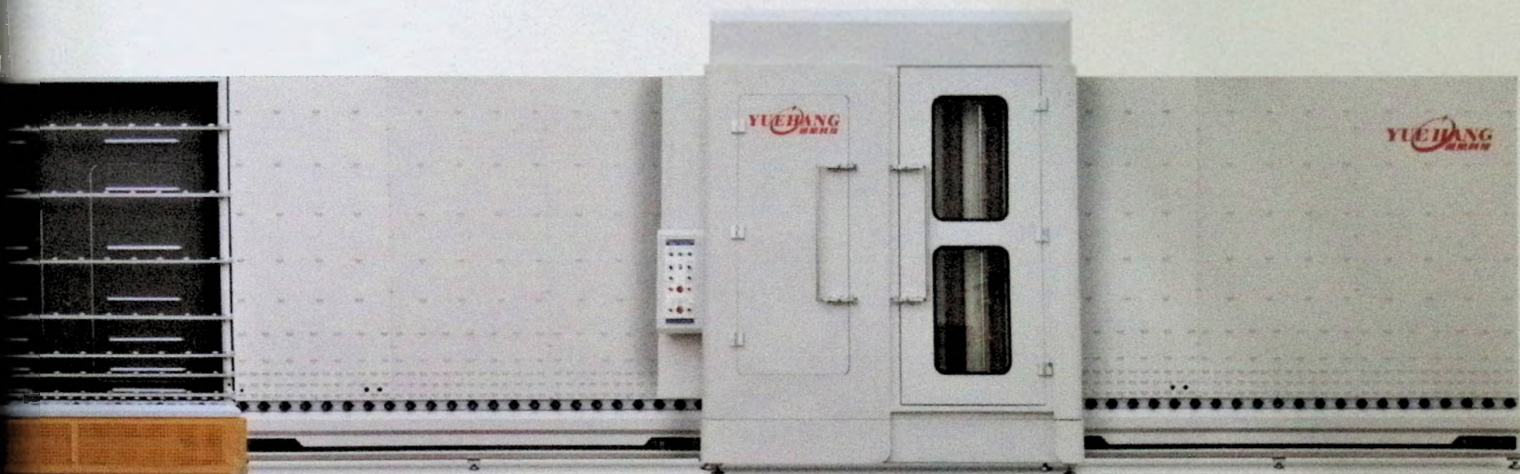


技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	中空玻璃密封厚度 Insulating Glass Thickness	玻璃清洗速度 Cleaning Speed	外形尺寸 Overall Dimension
YH-ZKX-2000×2500	380V 50Hz 35KW	0.6~0.8Mpa	2000×2500mm	260×450mm	3~12mm	≤80mm	2~12m/min	19700×1400×3100mm
YH-ZKX-2000×3000	380V 50Hz 35KW	0.6~0.8Mpa	2000×3000mm	260×450mm	3~12mm	≤80mm	2~12m/min	22300×1400×3100mm
YH-ZKX-2500×3500	380V 50Hz 39KW	0.6~0.8Mpa	2500×3500mm	260×450mm	3~12mm	≤80mm	2~12m/min	25300×1600×3600mm
YH-ZKX-2500×4000	380V 50Hz 39KW	0.6~0.8Mpa	2500×4000mm	260×450mm	3~12mm	≤80mm	2~12m/min	28150×1600×3600mm
YH-ZKX-2800×5000	380V 50Hz 40KW	0.6~0.8Mpa	2800×5000mm	260×450mm	3~12mm	≤80mm	2~12m/min	32300×1600×3950mm



全自动中空玻璃密封胶线 FULL AUTOMATIC INSULATING GLASS SEALING ROBOT

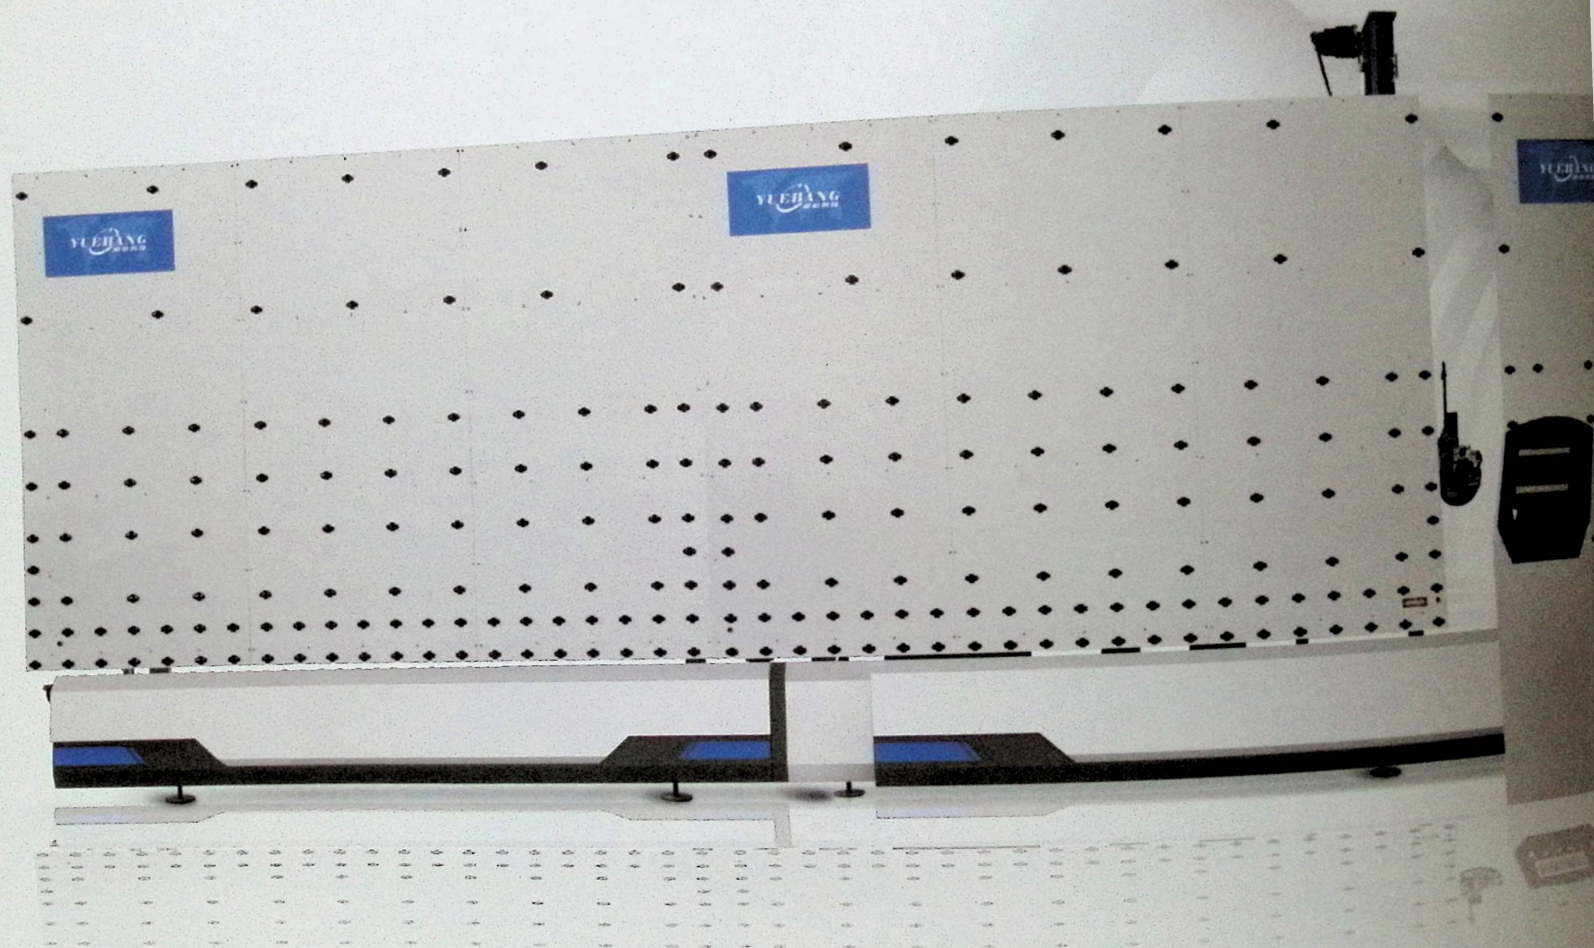

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	原片玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	打胶速度 Working Speed	密封胶最大压力 Max. Dispensing Pressure	外形尺寸 Overall Dimension
YH-FJX-2000×2500	380V 50Hz 8KW	0.5~0.7Mpa	2000×2500mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	8000×1400×2750mm
YH-FJX-2000×3000	380V 50Hz 8KW	0.5~0.7Mpa	2000×3000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	10000×1400×2750mm
YH-FJX-2500×3500	380V 50Hz 9KW	0.5~0.7Mpa	2500×3500mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	10500×1700×3450mm
YH-FJX-2500×4000	380V 50Hz 9KW	0.5~0.7Mpa	2500×4000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	11050×1700×3450mm

采用世界知名品牌——
安川运动控制系统及伺服控制系统，
性能稳定可靠。


设备特点 CHARACTERISTICS

- 可实现各种尺寸的矩形中空玻璃打胶的连续性，打胶效率高，质量稳定。
 - 两套完全独立的供胶系统，两种密封胶可任意切换（选配）。
 - 第三段可预存玻璃，加强设备运转的连续性，提高生产效率。
 - 边部涂胶充实无气泡，角部饱满，美观大方，无需人工修整。
 - 采用世界知名品牌——安川运动控制系统及伺服控制系统，性能稳定可靠。
 - 设备采用精确的同步带传输系统，确保玻璃运行平稳无污染。
 - 可配备两套供胶系统，两种密封胶切换快捷，一键式操作。（型号 II）
 - 支持三层玻璃涂胶。
- The adhesive continuity of rectangular insulating glass of various sizes can be realized, with high adhesive efficiency and stable quality.
 - Two completely independent glue supply systems, two kinds of sealants can be arbitrarily switched (optional).
 - The glass can be pre-stored in the third paragraph to strengthen the continuity of equipment operation and improve production efficiency.
 - The side coating is full without bubbles, and the corner is full without manual trimming.
 - World-renowned brand Yaskawa motion control system and servo control system have stable performance.
 - Unique automatic alarm device for glue quantity. Accurate synchronous belt transmission system ensures pollution-free operation of glass.
 - Using two sealant supply systems, switch fast and one-key operation. (Model II)
 - Suitable for triple glazing.





全自动中空玻璃密封胶线 FULL AUTOMATIC INSULATING GLASS SEALING ROBOT

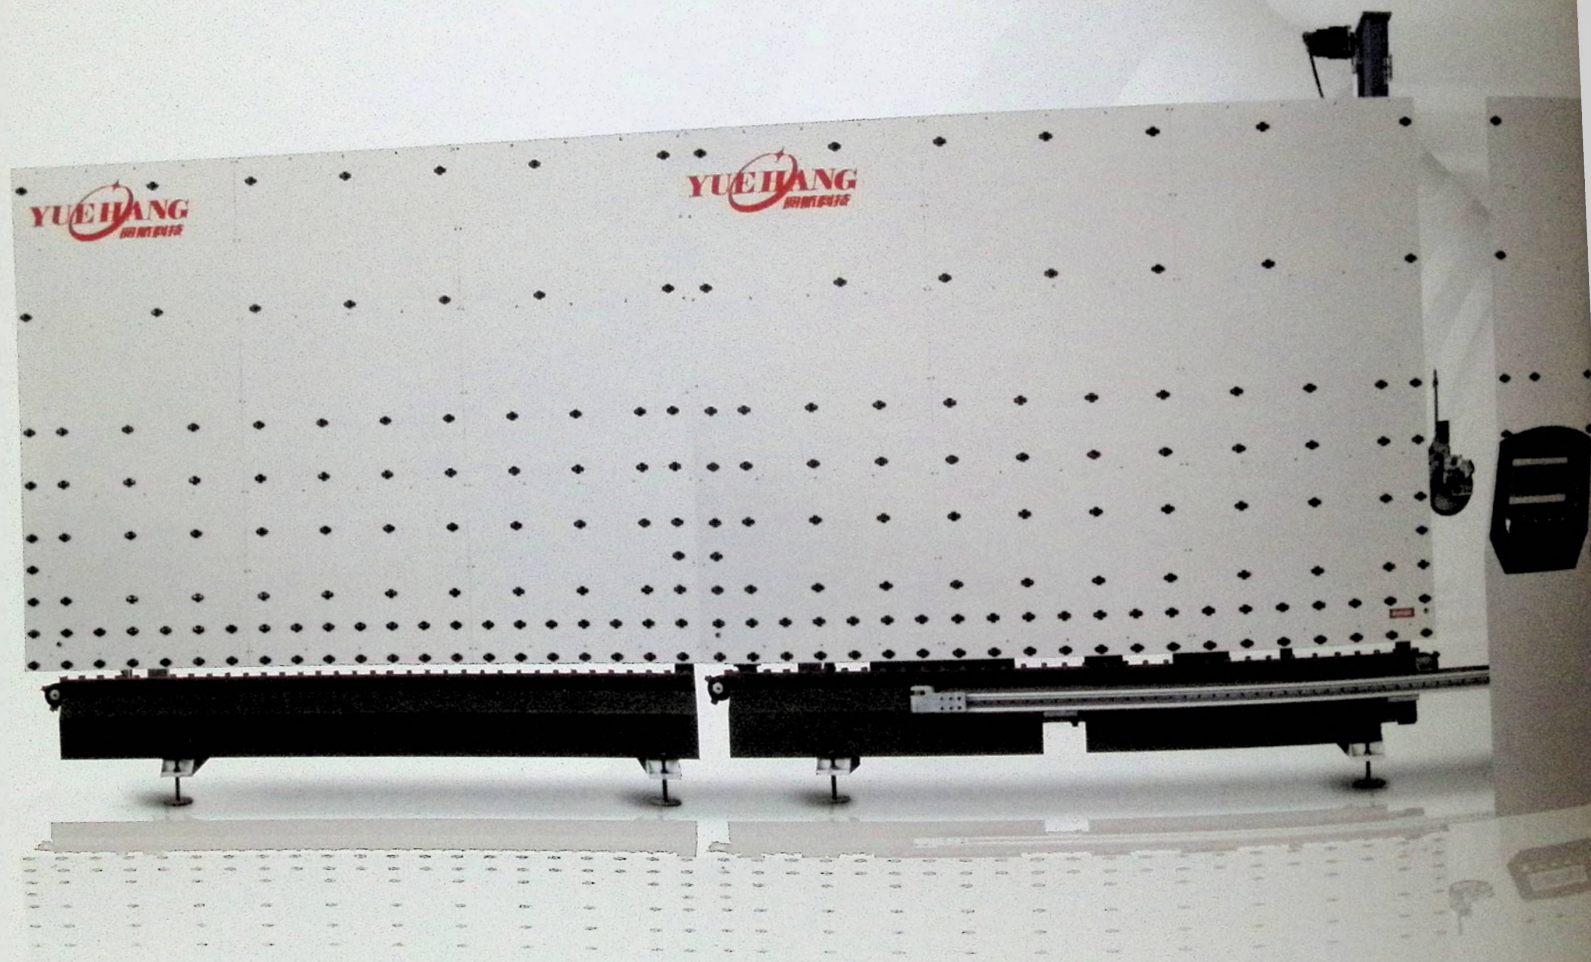

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	原片玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	打胶速度 Working Speed	供胶最大压力 Max. Dispensing Pressure	外形尺寸 Overall Dimension
YH-FJX-2000×2500	380V 50Hz 8KW	0.5~0.7Mpa	2000×2500mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	8000×1400×2750mm
YH-FJX-2000×3000	380V 50Hz 8KW	0.5~0.7Mpa	2000×3000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	10000×1400×2750mm
YH-FJX-2500×3500	380V 50Hz 9KW	0.5~0.7Mpa	2500×3500mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	10500×1700×3450mm
YH-FJX-2500×4000	380V 50Hz 9KW	0.5~0.7Mpa	2500×4000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	11050×1700×3450mm

采用世界知名品牌——
安川运动控制系统及伺服控制系统，
性能稳定可靠。

设备特点 CHARACTERISTICS

- 可实现各种尺寸的矩形中空玻璃打胶的连续性，打胶效率高，质量稳定。
 - 两套完全独立的供胶系统，两种密封胶可任意切换（选配）。
 - 第三段可预存玻璃，加强设备运转的连续性，提高生产效率。
 - 边部涂胶充实无气泡，角部饱满，美观大方，无需人工修整。
 - 采用世界知名品牌——安川运动控制系统及伺服控制系统，性能稳定可靠。
 - 设备采用精确的同步带传输系统，确保玻璃运行平稳无污染。
 - 可配备两套供胶系统，两种密封胶切换快捷，一键式操作。（型号 II）
 - 支持三层玻璃涂胶。
- The adhesive continuity of rectangular insulating glass of various sizes can be realized, with high adhesive efficiency and stable quality.
 - Two completely independent glue supply systems, two kinds of sealants can be arbitrarily switched (optional).
 - The glass can be pre-stored in the third paragraph to strengthen the continuity of equipment operation and improve production efficiency.
 - The side coating is full without bubbles, and the corner is full without manual trimming.
 - World-renowned brand Yaskawa motion control system and servo control system have stable performance.
 - Unique automatic alarm device for glue quantity. Accurate synchronous belt transmission system ensures pollution-free operation of glass.
 - Using two sealant supply systems, switch fast and one-key operation. (Model II)
 - Suitable for triple glazing.





全自动中空玻璃密封胶线
FULL AUTOMATIC INSULATING GLASS SEALING ROBOT



技术参数 TECHNICAL PARAMETERS

型号 Model	电功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	原片玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	打胶速度 Working Speed	供胶最大压力 Max. Dispensing Pressure	外形尺寸 Overall Dimension
YH-FJX-2500×3500	380V 50Hz 9KW	0.5~0.7Mpa	2500×3500mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	10500×1700×3450mm
YH-FJX-2500×4000	380V 50Hz 9KW	0.5~0.7Mpa	2500×4000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	11050×1700×3450mm
YH-FJX-2800×5000	380V 50Hz 12KW	0.5~0.7Mpa	2800×5000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	13500×1700×3600mm
YH-FJX-3000×6000	380V 50Hz 13KW	0.5~0.7Mpa	3000×6000mm	260×450mm	3~12mm	≤50mm	0~50m/min	≤35Mpa	13500×1700×3800mm

可实现各种尺寸的矩形中空玻璃打胶的连续性，
打胶效率高，质量稳定。


设备特点 CHARACTERISTICS

- 可实现各种尺寸的矩形中空玻璃打胶的连续性，打胶效率高，质量稳定。
 - 两套完全独立的供胶系统，两种密封胶可任意切换（选配）。
 - 第三段可预存玻璃，加强设备运转的连续性，提高生产效率。
 - 边部涂胶充实无气泡，角部饱满，美观大方，无需人工修整。
 - 采用世界知名品牌——安川运动控制系统及伺服控制系统，性能稳定可靠。
 - 设备采用精确的同步带传输系统，确保玻璃运行平稳无污染。
 - 可配备两套供胶系统，两种密封胶切换快捷，一键式操作。（型号 II）
 - 支持三层玻璃涂胶。
-
- The adhesive continuity of rectangular insulating glass of various sizes can be realized, with high adhesive efficiency and stable quality.
 - Two completely independent glue supply systems, two kinds of sealants can be arbitrarily switched (optional).
 - The glass can be pre-stored in the third paragraph to strengthen the continuity of equipment operation and improve production efficiency.
 - The side coating is full without bubbles, and the corner is full without manual trimming
 - World-renowned brand Yaskawa motion control system and servo control system have stable performance.
 - Unique automatic alarm device for glue quantity. Accurate synchronous belt transmission system ensures pollution-free operation of glass.
 - Using two sealant supply systems, switch fast and one-key operation. (Model II)
 - Suitable for triple glazing.





全自动中空玻璃密封胶线 FULL AUTOMATIC INSULATING GLASS SEALING ROBOT

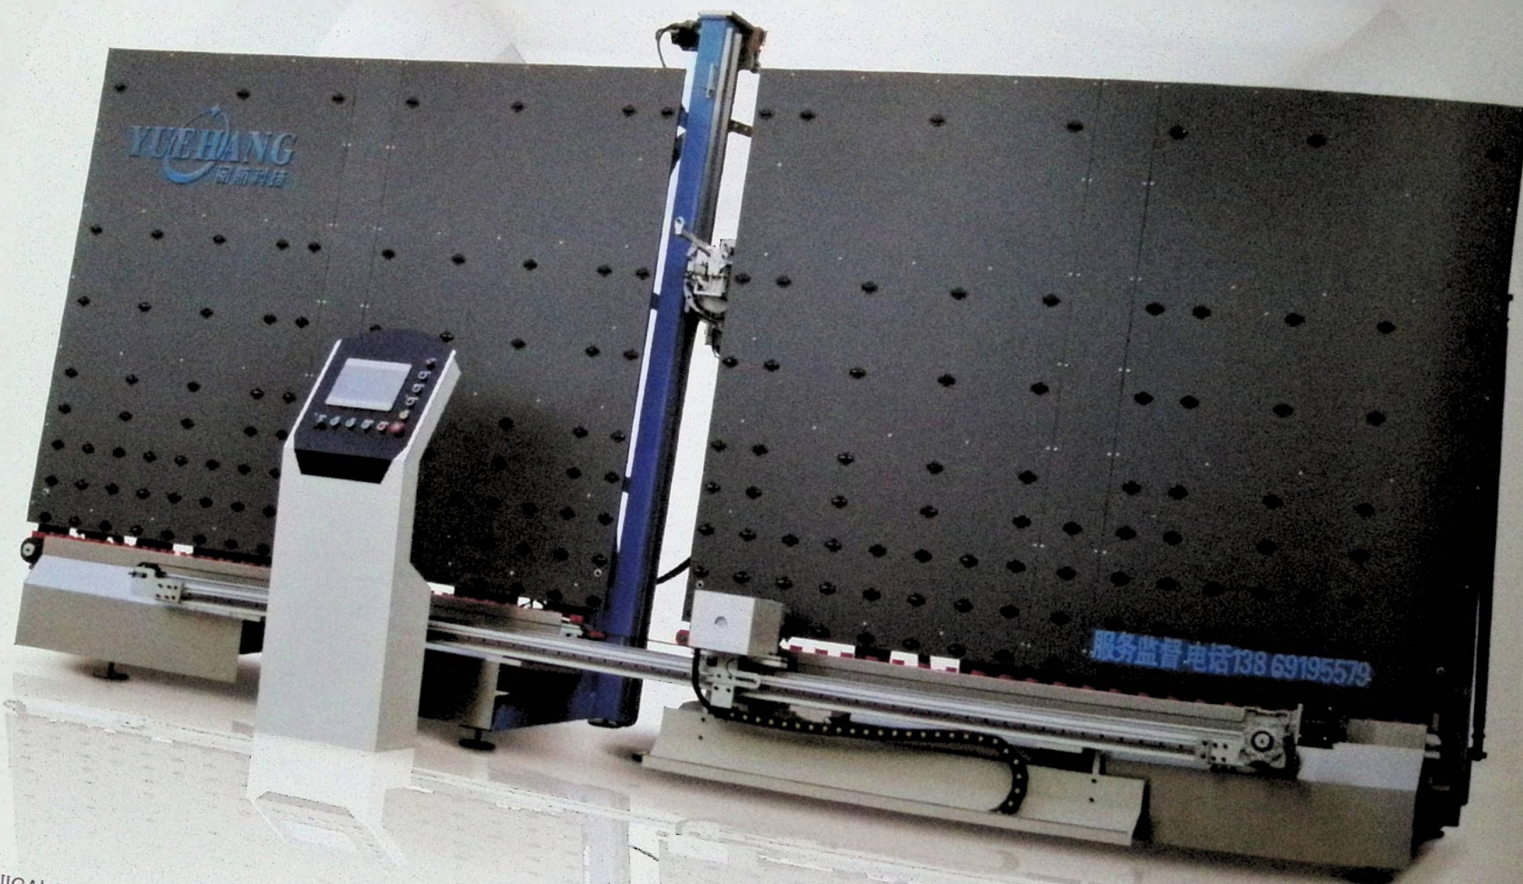

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	原片玻璃厚度 Glass Thickness	中空玻璃最大厚度 Insulating Glass Thickness	打胶速度 Working Speed	供胶最大压力 Max. Dispensing Pressure	外形尺寸 Overall Dimension
YH-FJX-2500×5000	380V 50Hz 12KW	0.5~0.7Mpa	2500×5000mm	260×450mm	3~12mm	<50mm	0~50m/min	<35Mpa	13500×1700×3450mm
YH-FJX-2800×5000	380V 50Hz 12KW	0.5~0.7Mpa	2800×5000mm	260×450mm	3~12mm	<50mm	0~50m/min	<35Mpa	13500×1700×3600mm
YH-FJX-3000×6000	380V 50Hz 13KW	0.5~0.7Mpa	2500×3150mm	260×450mm	3~12mm	<50mm	0~50m/min	<35Mpa	13500×1700×3800mm

人机友好界面:

简洁、采用简化思维设计的操作界面;

出胶压力及技术参数屏幕实时显示、

便于观察、操作简单。


设备特点 CHARACTERISTICS

- 可实现各种尺寸的矩形中空玻璃打胶的连续性, 打胶效率高, 质量稳定。
 - 边部涂胶充实无气泡, 角部饱满, 美观大方, 无需人工修整。
 - 人机友好界面, 简洁、采用简化思维设计的操作界面, 出胶压力及各个技术参数屏幕实时显示, 便于观察, 操作简单明了。
 - 电器元件, 电缆线采用进口品牌, 经久耐用。
 - 自动完成连线涂胶, 操作简洁方便。
 - 机部件采用数控加工中心制造, 零部件高标准化, 可都到互换性, 提高维护保养的方便性, 保证了设备长期稳定使用。
 - 设备组装采用流水线式, 精度高, 保证了设备长期稳定使用。
 - 伺服控制系统采用世界知名品牌(日本安川), 性能稳定, 运算速度快, 出胶精度高。
-
- The adhesive continuity of rectangular insulating glass of various sizes can be realized, with high adhesive efficiency and stable quality.
 - The side coating is full without bubbles, and the corner is full without manual trimming.
 - Human-computer interface, succinct, adopts simplified thought designed operation interface; sealant output pressure and other parameters shown on screen in -real-time, convenient to see and easy to operate.
 - Electrical parts and cable are used imported brand, with long endurance.
 - Automatically finish linear sealing, easy and convenient operation.
 - The machine frame is made by CNC processing center, spare parts with high standardization and could be interchanged, which improve convenience for maintenance and ensure long service life.
 - The machine is installed in assembly line, with high precision, ensuring stable working in long life.



自动高速玻璃清洗生产机

AUTOMATIC HIGH SPEED GLASS WASHING MACHINE

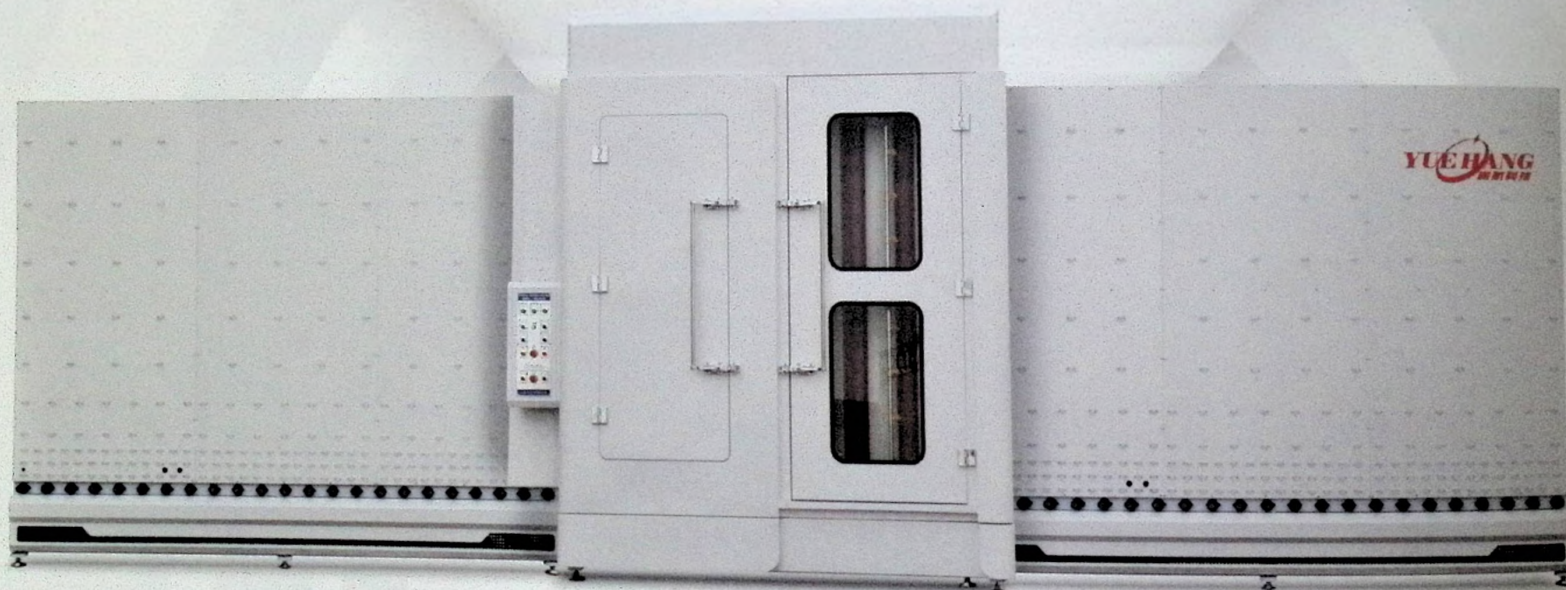

设备特点

- 可清洗镀膜玻璃、钢化玻璃、LOW-E玻璃等高档玻璃。
- 清洗机采用无油润滑轴承，稳定可靠。
- 采用立式倾斜机构，传送平稳、关键部分自动检控。
- 该设备可完成玻璃传送、清洗、干燥、检测出料等功能。
- 清洗机全部采用不锈钢材料，防腐耐用。

CHARACTERISTICS

- Available for washing coating glass, tempered glass, LOW-E glass etc.
- Washing machine adopts oilless bearing, stable and reliable.
- It adopts inclined structure, stable conveying, key components automatic detection.
- The equipment could complete functions of: glass conveying, glass washing, drying, testing and discharging etc.
- All washing parts are stainless steel, anticorrosive and durable.

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大加工尺寸 Max. Glass Size	最小加工尺寸 Min. Glass Size	清洗玻璃厚度 Glass Thickness	玻璃传送速度 Conveying Speed	玻璃清洗速度 Cleaning Speed	外形尺寸 Overall Dimension
YH-QXJ-2500	380V 50Hz 24KW	0.6~0.8Mpa	2500×3150mm	260×450mm	3~30mm	0~50m/min	2~12m/min	9200×2300×3500mm
YH-QXJ-2000	380V 50Hz 21KW	0.6~0.8Mpa	2000×2500mm	260×450mm	3~30mm	0~50m/min	2~12m/min	7800×1800×2950mm

玻璃吸吊机

GLASS SUCTION CRANE MACHINE




设备特点 CHARACTERISTICS

- 该机是搬运玻璃的理想专业设备。
- 适用搬运中空玻璃、钢化玻璃、玻璃幕墙等各类玻璃。
- 气动元件采用台湾亚德客，质量稳定、压力为0.6-0.8Mpa。
- 可以适用于300℃以下的高温玻璃的搬运。
- 可实现玻璃的0-90°、0-180° 翻转搬运、0-360° 旋转搬运。
- The best equipment glass machine used for handling glass.
- Suitable for moving insulating glass, tempered glass, glass curtain wall, construction of glass deep processing etc.
- Pneumatic components adopt Taiwan AIRTAC, stable quality, pneumatic pressure is 0.6-0.8Mpa.
- Suitable for high-temperature (below 300℃) glass.
- It can turn the glass 0-90°, 0-180°, 0-360°.

技术参数 TECHNICAL PARAMETERS

型号 Model	YH-XPJ-300
供气压力 Air Pressure	0.5-0.8Mpa
左右旋转角度 Rotation Angle	90°
轨道长度 Track Length	3000/4000mm
立柱高度 Column Height	3400/3900mm
垂直升降 Vertical Lift	1000mm
吸盘个数 No. Sucking Disc	2 / 4 / 6个
操作方式 Operation Way	手控开关式
滑动方式 Sliding Mode	手动

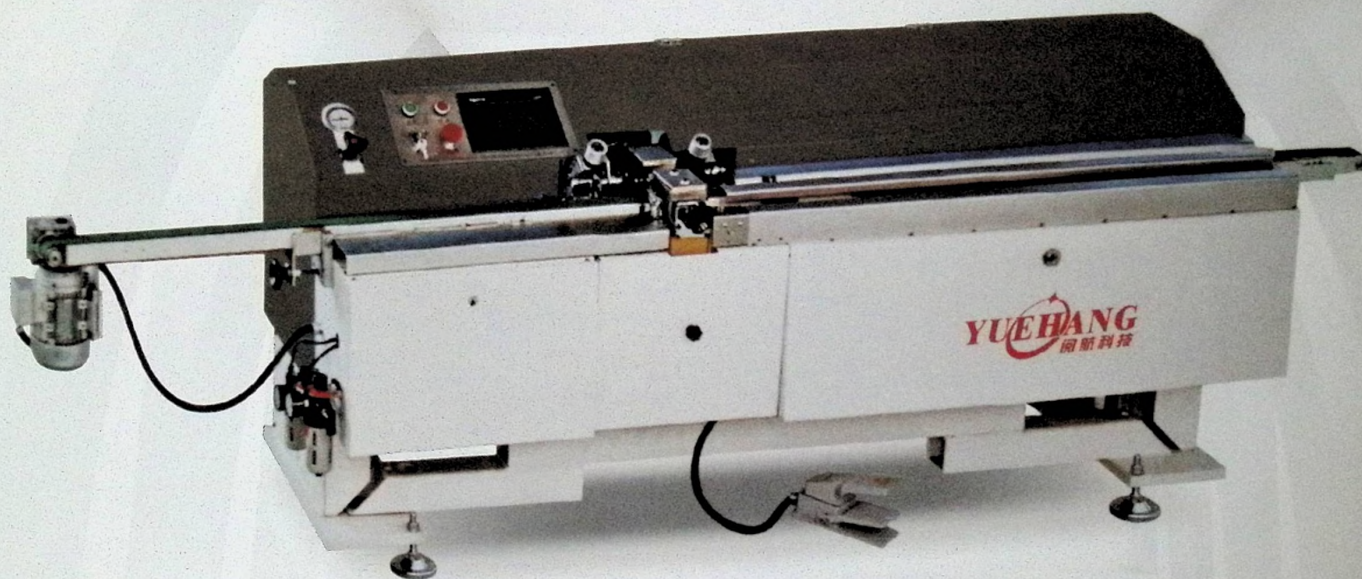

设备特点


- PLC控制系统，滚轮的下压和喷嘴的开关随速度变化自动调节。
- 根据测量装置测得的间隔条宽度自动调节喷嘴的宽度。
- 温度、压力和涂布速度可调。
- 自动排气系统和胶量过少指示器。
- 通过最优化的加热电路实现短的加热周期。
- 最优化的涂胶质量；操作简便，维护成本低。

CHARACTERISTICS

- PLC control system, hold down rollers and nozzle open/close automatically controlled with speed adjustment.
- Measuring device for automatic adjustment of nozzle head distance according to measured spacer width.
- Infinitely adjustment for temperature, pressure and coating speed.
- Automatic bleeding system and low level indicator.
- Short heat up-cycle by optimized heating circuits.
- Optimized coating quality. Easy operation, low maintenance design.

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	耗气量 Air Consumption	间隔条宽度 Spacer bar width	间隔条高度 Spacer bar height	打胶速度 Working Speed	挤胶压力 Dispensing Pressure	外形尺寸 Overall Dimension
YH-DJJ-03	380V 50Hz 5KW	0.5~0.8Mpa	60L/min	4~30mm	6~8.5mm	2~40m/min	10~20Mpa	3020×715×960mm

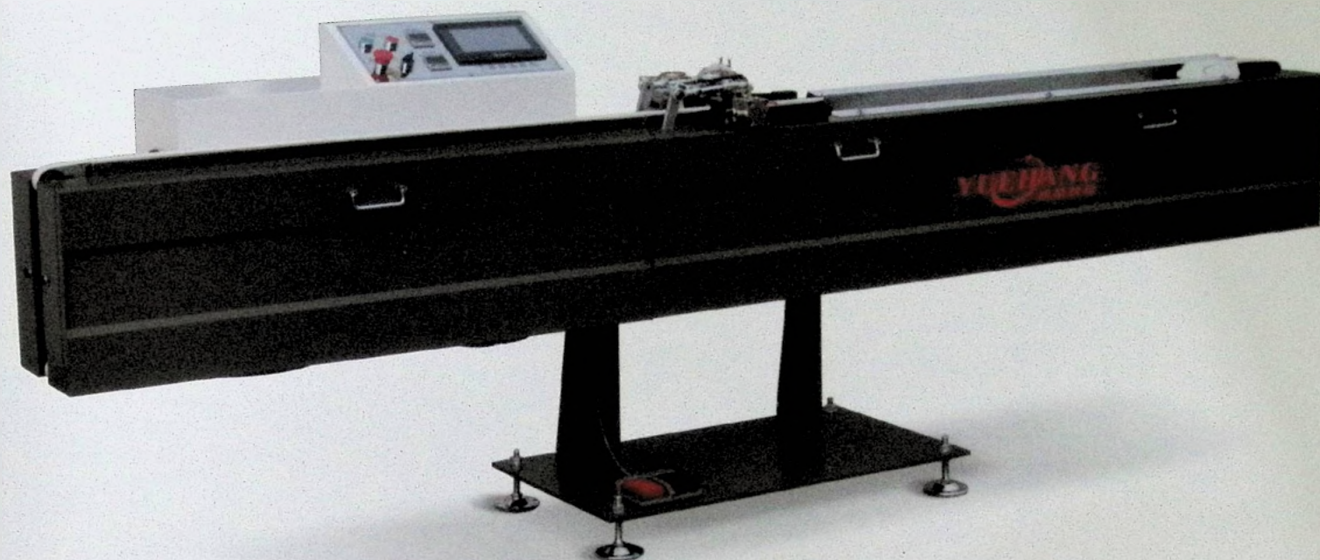

设备特点

- 采用先进的高效气动泵系统，使设备压力更加稳定且节能。
- 采用触摸屏人机界面控制系统，操作更加清晰简单。
- 采用变频调速输送系统，使1-5档速度从15-30米/分可选。
- 率先采用先进的自动调胶系统，可在6-18.5mm内任意调整。
- 胶缸采用回转式结构，自由旋转、放胶、维护更加方便。
- 大尺寸胶缸，一次的加胶量可达14KG。工作台可升降(选配型)。

CHARACTERISTICS



- Using advanced pneumatic pump system, the pressure to make the device more stable and energy-saving.
- Using touch screen control system, the operation more clear and simple.
- Delivery frequency control system, so that the speed from 1-5 at speed 15-30 m/min optional.
- Pioneered the use of advanced auto-dispensing system can be adjusted within 6-18.5mm.
- Melter using rotary structure, free rotation, glue, maintenance more convenient.
- Large-size plastic cylinder, plus a glue up to 14KG. Table can lift (optional type).

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	耗气量 Air Consumption	胶头可调整范围 Adjustable Range	打胶温度 Temperature	胶缸直径 Pistons Diameter	打胶速度 Working Speed	挤胶压力 Dispensing Pressure	外形尺寸 Overall Dimension
YH-DJJ-02	380V 50Hz 3.75KW	0.5~0.8Mpa	60L/min	6~18.5mm	110~140℃	φ 200mm	2~45m/min	10~20Mpa	3000×650×950mm



全自动铝条折弯机 AUTOMATIC ALUMINIUM SPACER BENDING MACHINE

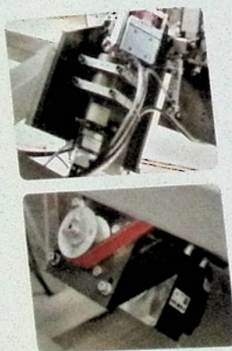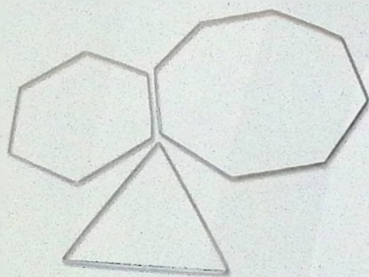

设备特点


- PLC控制系统，人机界面友好，操作方便。
- 伺服控制系统控制进料机构。
- 各种规格任意选取；设有四组尺寸铝条储存单元。
- 支持不同形状连续折弯；大尺寸铝框折弯功能。
- 折弯外侧分开式不锈钢护板。
- 铝条自动焊接功能；铝条焊接口自动避让。

CHARACTERISTICS

- PLC control system, friendly interface, easy operation.
- Servo motors control feeding system.
- Any width spacer can be bended. 4 group size magazines of spacer.
- Support different shape continuous bending.
- Big size aluminum frame, bending auxiliary function.
- Bending lateral adopts split stainless steel shield.
- Spacer automatic welding function. Spacer welding place avoiding.

技术参数 TECHNICAL PARAMETERS

型号Model	YH-ZWJ-02
输入电源Input Voltage	380V 50Hz
输入功率Input Power	3.5KW
供气压力Air Pressure	0.4-0.6Mpa
铝条规格Spacer Specification	5.5-27mm
外形尺寸Overall Dimension	9800×2100×2600mm

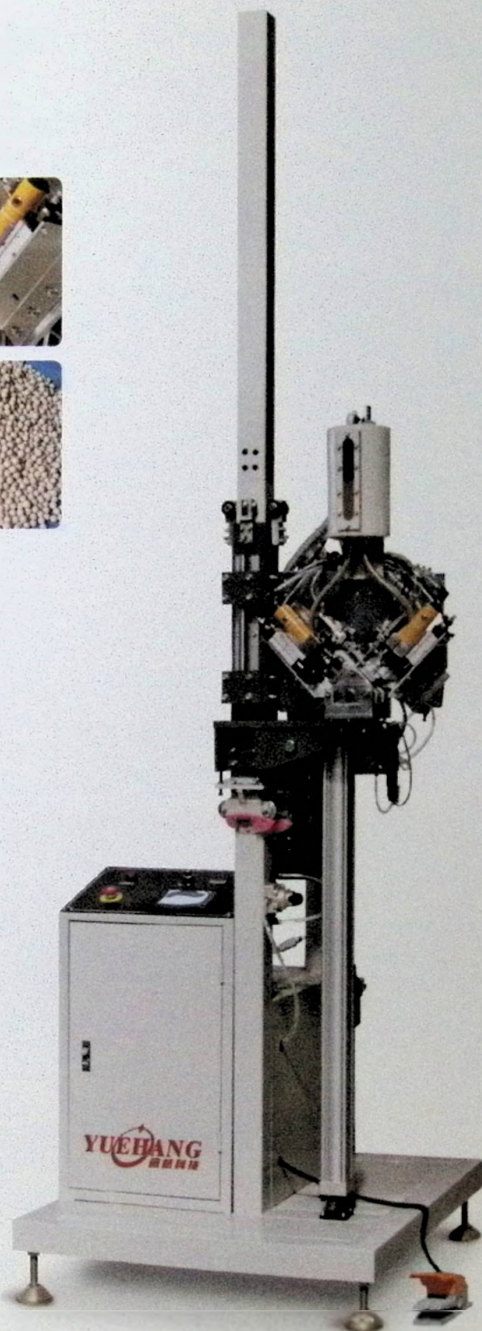


全自动分子筛灌装机

AUTOMATIC DESICCANT FILLING MACHINE

- 本机由PLC控制，在密闭条件下灌装，解决了干燥剂吸水汽失效，提高效率及中空玻璃寿命。
 - 是折弯式中空玻璃生产中的必备设备。
 - 铝条背面中间打孔、灌装、自动封胶。
 - 可灌装自动折弯成形铝框和普通直插角铝框。
 - 灌装高度可根据铝框大小调节。
 - 独特的先进上料装置，可自动补料。
- Controlled by PLC, filling in confined conditions, solve the problem of steam absorption of the molecular sieve, improve efficiency and life-time of insulating glass. It is necessary equipment for insulating glass.
 - Make hole back and middle of the aluminum spacer, filling, and close the hole automatic
 - Used for both spacer frame made by bendable spacer and common aluminum frame with straight connectors.
 - Filling height can be adjusted according to the size of aluminum frame.
 - Unique and advanced feeding device, automatic feeding

技术参数 TECHNICAL PARAMETERS

型号 Model	YH-FZS-02
电源功率 Power Supply	220V 50Hz 0.5KW
供气压力 Air Pressure	0.6-0.8Mpa
铝条规格 Spacer Specification	5.5-27mm
灌装速度 Filling Speed	5-10s/个
分子筛直径 Desiccant Diameter	≤ 0.5mm
最小灌装尺寸 Min. Filling Speed	250×250mm
最大灌装尺寸 Max. Filling Speed	2000×2000mm
外形尺寸 Overall Dimension	1050×850×4000mm

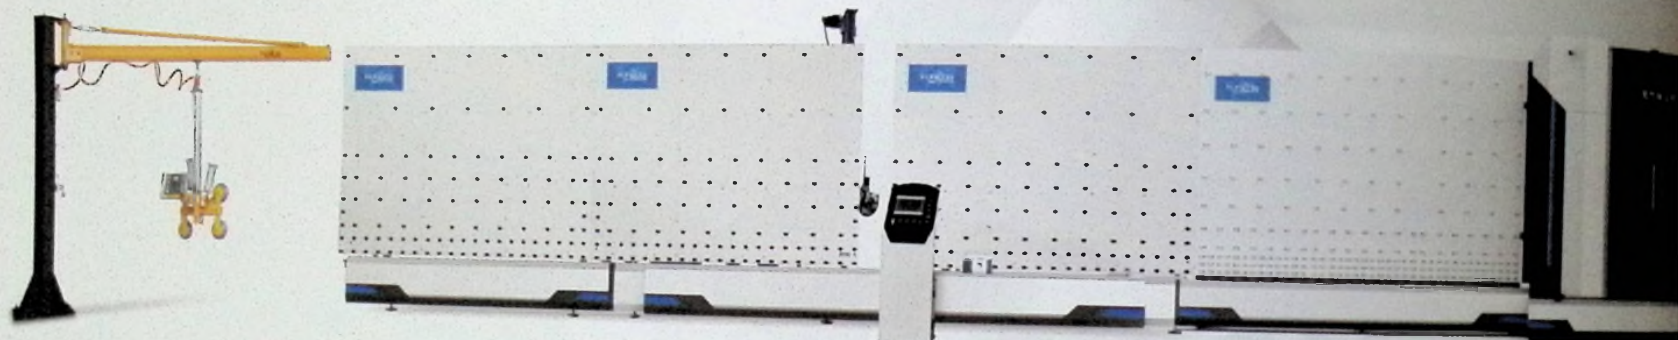


⑧ <<<



<<< ⑦ <<<



⑨



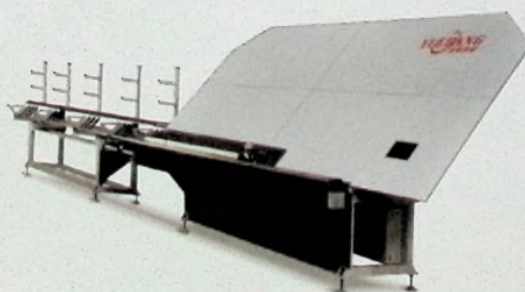


③




④



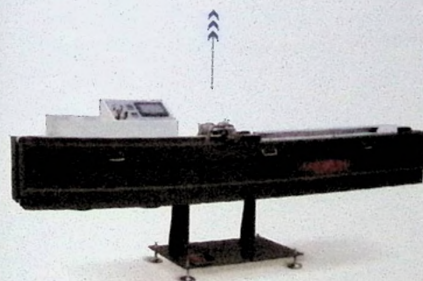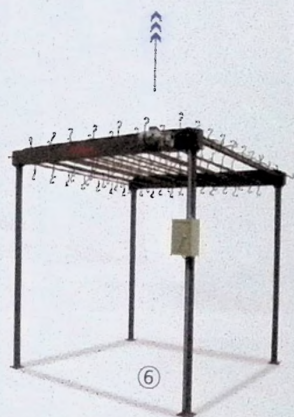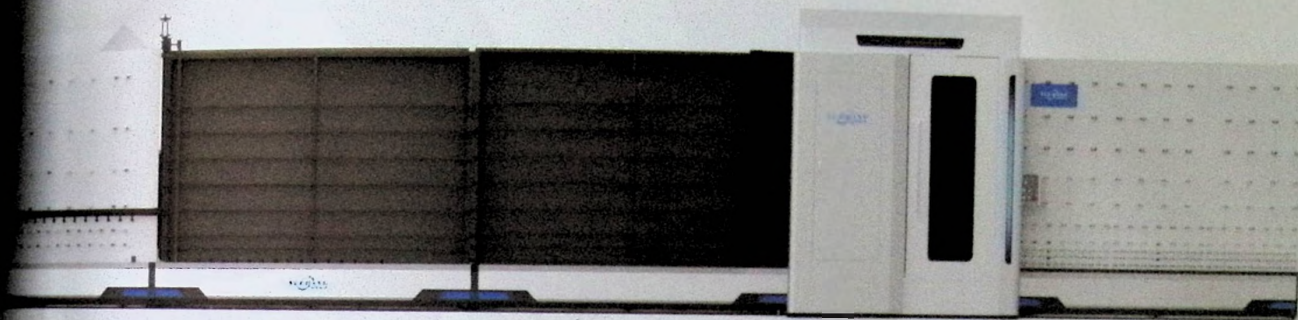

←←← ② ←←←



- ① 自动玻璃上片机
- ② 自动充气中空玻璃生产线
- ③ 全自动铝条折弯机
- ④ 全自动分子筛灌装机
- ⑤ 丁基胶涂胶机
- ⑥ 铝框输送机
- ⑦ 全自动中空玻璃密封胶线
- ⑧ 玻璃吸吊机
- ⑨ 玻璃运输车


- ① Automatic Glass Uploading Machine
- ② Insulating Glass Argon Gas Filling Line
- ③ Aluminium Spacer Bending Machine
- ④ Automatic Desiccant Filling Machine
- ⑤ Butyl Sealant Coating Machine
- ⑥ Aluminium Frame Conveyors
- ⑦ Insulating Glass Sealing Robot
- ⑧ Glass Suction Crane Machine
- ⑨ Glass Conveyors

YUEHANG

YUEHANG
宇航科技

自动高效配片理片笼

AUTOMATIC EFFICIENT SORTING AND SORTING SYSTEM

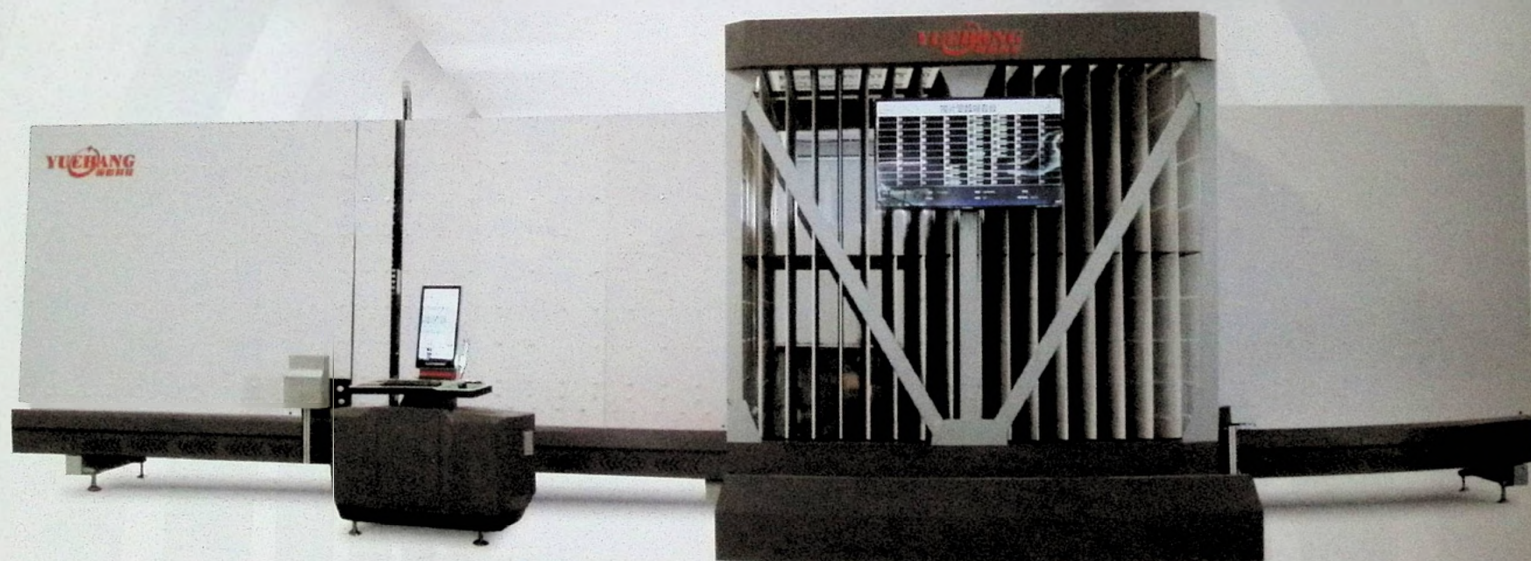

设备特点

- 该线实现全自动玻璃选片配片，降低劳动强度、节省人力，提高生产效率。
- 采用Windows操作系统界面，操作简洁方便。
- 伺服系统采用世界知名品牌，自动完成玻璃长度和宽度的测量，测量精准。
- 可与ERP系统智能连线，订单进度实时监控，缺片、错片自动报警。
- 储片段包含120个网格，可存储240片玻璃，智能选择记录网格内玻璃信息。

技术参数 TECHNICAL PARAMETERS

型号 Model	电源功率 Power Supply	供气压力 Air Pressure	最大玻璃尺寸 Max. Glass Size	最小玻璃尺寸 Min. Glass Size	玻璃厚度 Glass Thickness	外形尺寸 Overall Dimension
YH-LPL-2000×3000	380V 50Hz 9KW	0.6-0.8Mpa	2500×3000mm	500×300mm	4-8mm	14000×10000×3000mm

CHARACTERISTICS

- It can realize automatic glass selection and matching, reduce production labor intensity, save manpower and improve production efficiency.
- Windows operating system interface, simple and convenient operation.
- Servo control system adopts world famous brand. The length and width of the glass are measured automatically by the servo system, and the measurement is accurate.
- Intelligent connection with ERP system, real-time monitoring of order progress, automatic alarm of missing pieces and wrong pieces.
- Storage fragment contains 120 grids, store up to 240 pieces of glass, intelligent record the information of glass in the grid.

本公司不断提高产品性能，对产品宣传资料拥有解释权，如有更改，恕不另行通知。
Our products has been updating, please forgive us to not note you once anything changes.



山东阅航环保科技有限公司
SHANDONG YUEHANG ECO TECHNOLOGY CO., LTD.

地址：中国·山东省济南市章丘区清源大街与创业路交汇处

Add: Qingyuan Street and Chuangye Road interchange,

Zhangqiu Development Zone, Jinan, China.

电话 (Tel): 0086-531-83711719 · 13698623488 · 13869195579

传真 (Fax): 0086-531-83711719

网址 (Website): www.sdyuehang.com

