

威海宇光施尔乐密封材料有限公司  
威海宇光施尔乐节能材料有限公司  
宇光施尔乐节能材料(淮安)有限公司  
宇光施尔乐(无锡)节能材料科技有限公司  
商丘蓝星镀膜玻璃有限公司



YU GUANG SEALER  
宇光施尔乐  
SEALER USA



# C 企业简介 COMPANY PROFILE

宇光施尔乐下设：威海宇光施尔乐密封材料有限公司、威海宇光施尔乐节能材料有限公司、宇光施尔乐节能材料(淮安)有限公司、宇光施尔乐(无锡)节能材料科技有限公司、商丘蓝星镀膜玻璃有限公司。

Yuguang Sealer consists of 5 companies, namely, Weihai Yuguang Sealer Energy-saving Materials Co.,Ltd., Weihai Yuguang Sealer Sealing Material Co.,Ltd., Yuguang Sealer Energy-saving Material (Huaian) Co., Ltd., Yuguang Sealer (Wuxi) Energy-saving Materials Technology Co.,Ltd. and Shangqiu LAN-STAR Glass Co., Ltd.

宇光施尔乐是一家专注于生产建筑节能材料及中空玻璃配套材料研究、生产、销售的高科技企业。公司主营中空玻璃配套系列节能材料、大小桶通用丁基胶机、丁基胶、暖边条、直插件等系列产品。现已拥有丁基胶系列、钢直插件系列、注塑直插及角插系列、暖边条系列、同步皮带系列、中空玻璃装饰条系列、中空环、中空线打胶机系统配件、钢化炉系统配件等五金配件九大体系.上千种产品。并具有面向市场进行开发其他节能系列产品的研发能力。

Yuguang Sealer is a high-tech enterprise specializing in the research, production and sales of building energy-saving materials and insulating glass supporting materials. The company mainly deals in hollow glass series of energy-saving materials, size through universal-butyl adhesive machine, butyl rubber, warm edge spacer, straight plug and other products. Now we have a series of butyl rubber, steel straight plug series, injection line and angle plug series, warm edge series, hollow glass aluminum series, hollow glass decoration series, hollow rings, auxiliary equipment, gluing machine accessories, and other hardware accessories steel furnace system. We are also able to develop new energy-saving products meeting market demand.

经过十几年的市场风雨的洗礼，宇光施尔乐已具有雄厚的研发力量、丰富的制造经验、科学的经营理念和管理方法、精益求精的精品意识、国内一流的检测手段和完善的售后服务体系。多年被市场认可的质量信誉和品牌形象使宇光公司与南玻集团、台玻集团、信义集团、耀皮集团、泰诺风、北玻集团、福耀集团、旗滨集团等玻璃深加工三十强企业结成稳固的合作伙伴关系。营销足迹遍布全国,远涉海外形成“被覆九州”的广阔辐射空间，产品远销法国、西班牙、土耳其、韩国、印度、中东等国家和地区。

After more than 10 years of the baptism market, Yuguang company has a strong R & D force, rich manufacturing experience, business philosophy and scientific management methods, quality consciousness of excellence, the domestic first-class detection means and perfect customer service system. For many years recognition of the quality reputation and brand image by the market, the Yuguang company has established solid partnership with such Top 30 glass deep processing enterprises as CSG, Taibo group, Xinyi Group, Yaopi group, Technoform, North Glass group, Fuyao Group, Qibin Group. Our products sell well across the world. Products are exported to France, Spain, Turkey India, South Korea, the Middle East and other countries and regions.

面对市场竞争新形势，宇光施尔乐坚持“诚信为本、服务至上、发挥优势、体现特色、追求卓越、领导潮流”的经营方针和“创世界名牌”的发展战略，自主创新、研究开发，全力推进资本多元化、市场国际化和现代管理现代化，完善营销网络和科技创新体系，竭诚希望和广大客商携手架起友谊的桥梁，共同为我们的生活添色彩。

Facing the new situation of market competition, we have persisted on the business idea of "Integrity Basis, service first and Quality First" for the stable and constant development. As well as promote the diversified capital market, internationalization and management modernization, improving the marketing network and the innovation system of science and technology, sincerely hoping that customers set up a bridge of friendship, to add color to our lives.



全面提升服务管理水平

Improve the level of service management

致力于树立宇光施尔乐品牌

To establish a "Yuguang Sealer" brand

满足顾客的需要和期望

Meet customer needs and expectations

企业创新准则

Enterprise innovation rules

满足市场、创造市场

Create and satisfy the requirements of market

服务理念

Service concept

“用户”之东而东

After the users joy and joy

服务程序

Service process

开发—售前—售中—售后—回访

Development - Pre-sale service - During sale - After sale - Return visit

经营理念

Management Ideas

真诚、友好、平等、尊重、均利、共赢

Integrity, Friendly, Equality, Respect, All-win

做一个最优秀的服务商


Be the best service provider

社会责任理念

Social responsibility

节约利用能源、保护环境

Saves the energy, Preserve the ecological environment

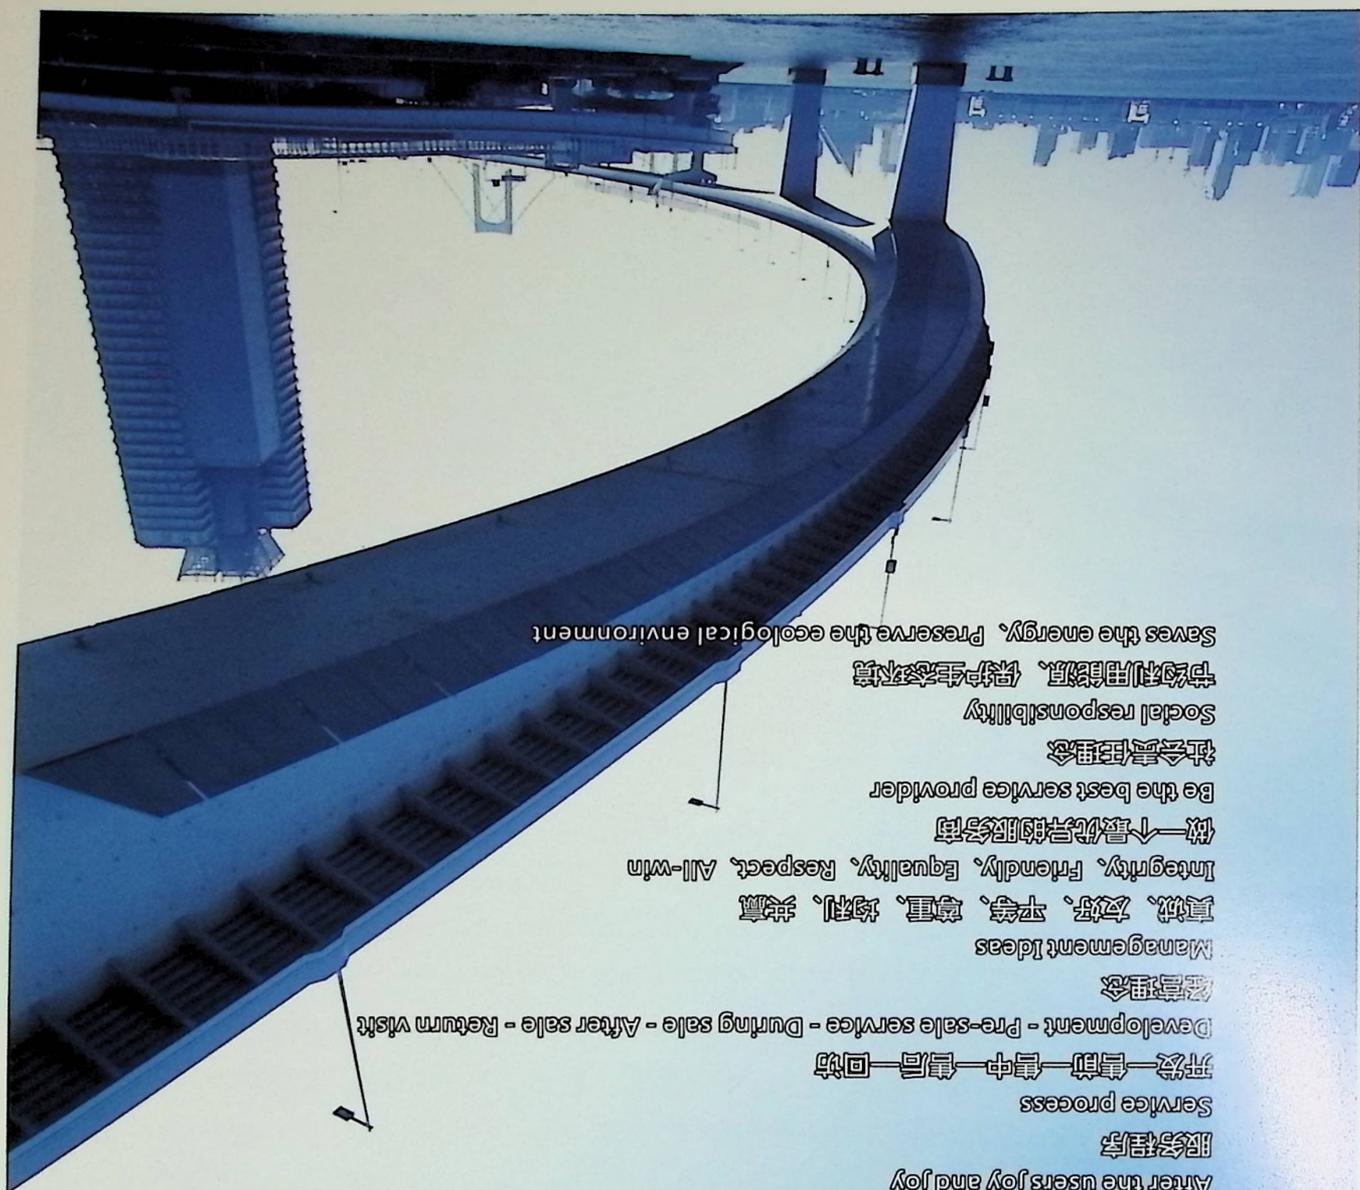



**施尔乐**——不仅仅是密封胶  
品质和信赖的保证  
成功是我们的信念

Sealer-It's not just sealant, we have a good knowledge of the products there and we are able to assure our clients of reliable quality.

施尔乐公司的核心精神:诚实、尽责、尊重、承诺。我们正寻找忠于发明创造专业人才,通过团队合作,一起来满足我们的需求。因为我们深信:竞争力源于技术诀窍!

The core spirit of the Sealer Inc.:Honest, Commitment, Respect, Promise.we' re looking for professionals who are interested in invent in the future,through team research and development,let' s meet our requirements.Because we are quite sure that core competitive force for an enterprise roots in constant leading technology.

## SEALER 丁基胶的优异性能

### The superior performance of Sealer

- 丁基胶符合欧洲标准EN1279-4和JC/T914-2014国标。
- Professional manufacturer,the products accord with the European standard EN1279-4 and JC/T914-2014.
- 剪切强度大,剪切强度 $\geq 2.4$ mpa.
- With the sealant of the biggest shear strength at the moment,shear strength  $\geq 2.4$ mpa

应用:使用丁基胶涂布机,经加热盘加热后,丁基胶会在压表面软化,经设备施压,经管道流出。通过实践证明,如果设备的加热电路彼此分开,控制系统相对独立,效果会更好,充分保证挤压垫处温度最低,从而保证胶嘴处温度最高。鉴于理想的应用温度取决于多项参数,如:设备性能、环境温度等。建议实验多次,以便准确的估计应用的温度。建议温度最好在110°至140°之间,未经挤压的聚乙烯丁烯可以用相同的一块材料轻轻地粘合以便取掉。水分聚集会影响聚乙烯丁烯和表面的接触,因此不要用湿冷的间隔条。需保证间隔条等材质的干燥和表面洁净。

Application:Using the Butyl coating machine,after heating by the heating plate,soften the sealant on the surface,the sealant is extruded through equipment to flow out.Proved through practice,if the heating circuits of the device are separated from each other and relative independency of control systems,the sealant will access to better results,ensure the lowest temperature in the extrusion pad,to ensure that the nozzle temperature is the highest.The ideal application temperature depend on a number of parameters,for example:device performance、ambient temperature and so on.we suggest trying time and again,to ensure accurately estimate the appropriate temperature.Serving temperature between 110°Cand 140°C , unextruded polyisobutene can be gently glued together with the same material to remove it.




## 防火、光伏用丁基胶 Butyl rubber for fire protection and photovoltaic

施尔乐防火丁基胶是一种同时具有粘接和密封性能的多用途功能材料。它既可以防止内部气体或液体泄漏，又可以防止外部灰尘、湿气、水分、污物和化学药品等侵入，并能防止机械振动、冲击损伤或达到隔音隔热的效果。同时能随密封面形状而变形，不易流淌并有一定的粘接性，广泛应用于防火玻璃、光伏玻璃、土木建筑、电子电器、机械设备和交通运输器具及其它领域零部件的密封。配套施尔乐不锈钢间隔条，具有优秀的防火性能、可靠的密封结构、稳定的化学、力学性能，为复合防火玻璃添砖加瓦。

The fire retardant butyl adhesive is a kind of multi functional material with adhesive and sealing properties. It can not only prevent the internal gas or liquid leakage, but also prevent the invasion of external dust, moisture, moisture, dirt and chemicals, and can prevent mechanical vibration, impact damage or achieve the effect of sound insulation. At the same time, it can deform with the shape of the sealing surface, is not easy to flow, and has a certain adhesive property. It is widely used in the sealing of fireproof glass, photovoltaic glass, civil construction, electronic and electrical appliances, mechanical equipment, transportation equipment and other fields. Equipped with Sealer stainless steel spacer bar, it has excellent fireproof performance, reliable sealing structure and stable chemical and mechanical properties, which contributes to the composite fireproof glass.



## 丁基胶检测报告

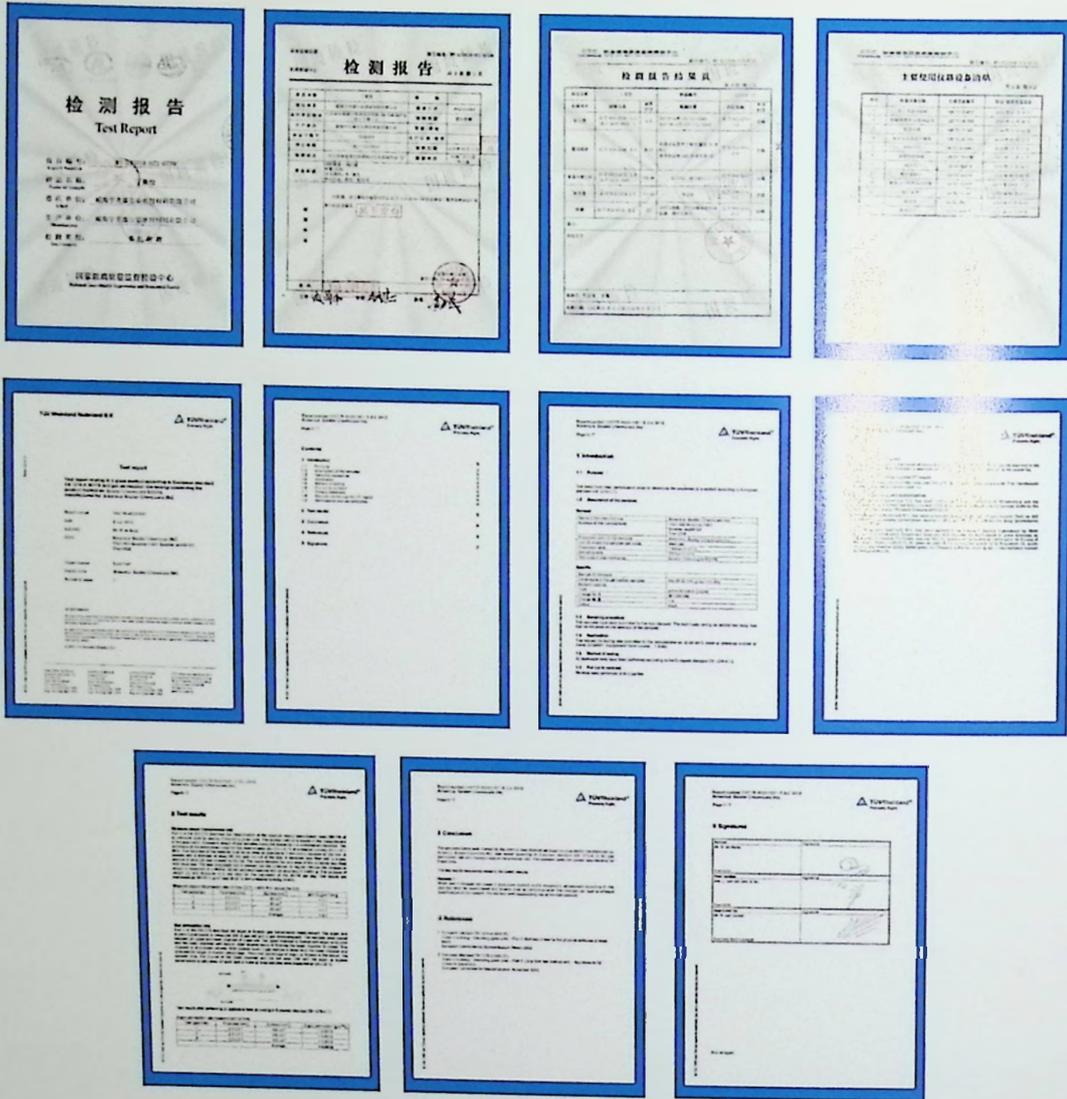

## 丁基胶技术数据 The test report of Sealant

颜色 Color	黑色 Black	可根据客户要求生产灰色、白色 Produce Grey, while upon customer's special requirement
气味 Smell	无味 Tasteless	环保、无毒 Non-toxic
连续性 Continuity	永久可塑 Malleable strong	良好密封品质的保证 Ensure the sealing of the glass
固成份 Solid-state	100%	便于搬运、存放 Easy of carrying and store
使用温度范围 Nominal temperature of use	-30°C-80°C	
短期曝湿 (长达2小时) Short-term critical wet	180°C	
挤出温度范围 Nominal range of use	120-160°C	
挤出压力 Pressure value	200MPa	

## 应用 Application

使用丁基胶涂布机，加热盘加热后，丁基胶会在挤压表面软化，故可以通过泵施压，经管道泵出。实践证明，如果设备的加热电路彼此分开，控制系统相对独立，效果会更好，充分保证挤压垫处温度最低，从而保证胶嘴处温度最高。

Using butyl rubber coating machine, heating plate after heating, butyl rubber will soften in the surface of extrusion, therefore, can through the pump pressure, after a pipeline pump in addition to the practice has proved that if the device of heating circuit separated from each other, relatively independent control system, the effect will be better, fully assure the temperatures of dummy block in minimum, thus ensuring rubber mouth place highest temperature.

对于理想的应用温度取决于多项参数，如：设备性能、环境温度等。建议试验多次，以便准确的估计应用温度。建议温度最好在110°C至140°C之间，未经挤压的聚异丁烯可以用相同的一块材料轻轻地粘合以便取掉。水份聚集会影响聚异丁烯与表面的接触，因此不要用湿冷的间隔条。要充分加温以保证间隔条材质的干燥和表面洁净。

Given the ideal application temperature depends on several parameters, such as: equipment performance、environment temperature test many times. in order to accurately estimate application temperature suggest best between 110°C and 140°C, without extrusion of polyisobutylene can use the same piece of material adhesion gently in order to take the water gathered will affect polyisobutylene and surface contact, so don't use the wet article interval to fully heating to ensure that the interval the material of the surface of the dry and clean.

## 存放 Location mode

霜冻敏感性 Frost sensitivity	不敏感，但在使用前需要在工作温度下存放足够时间 It's not sensitive, but it should be stored in the working temperature for enough time before using
建议存放温度 Recommended storage temperature	-10°C至+40°C，在工作温度下避免日光直射或热辐射。存放不会影响产品质量，但可能会影响其工作特性 Avoiding direct sunlight or thermal radiation storage at operating temperature will not affect the quality of the product, but may affect its working characteristics
储存时间 Storage time	原厂包装保存24个月 Original packing, keep for 24 months

7kg/桶 (直径180-190mm)，28kg/箱、纸桶、纸箱、木托、大桶丁基胶200kg-245kg/桶  
7kg/barrel (diameter:180-190mm), 28kg/CTN, the pail of butyl rubber 200-245kg/pail



# 创新型大小桶通用丁基胶机

ollow line special polyurethane wheels



我公司和南玻集团共同研制、生产的创新型大小桶通用丁基胶机，经过5年的研发时间，已经推向市场，以其经济实用性、可靠性很快得到整个南玻集团的高度认可，并逐步推向全国市场，创新型大桶丁基胶机有效的减少了因为频繁换胶产生的气泡胶、效率低、漏油、胶嘴出胶不稳定、外界温度影响出胶等问题。维护使用成本大大降低，设备稳定程度成倍提高。

Our company and The South Glass group jointly developed and produced innovative VAT Butyl rubber machine,after more than 5 years of research and development time,has been put on the market,with its economic and practical,relability will soon be the whole South glass group highly recognized,and comprehensive to the national market.Innovative VAT buytl rubber machine can effectively reduce the problems caused by frequent changing of rubber,such as rubber gum、low efficiency、oil leakage、unstable glue production and external temperature effect.the maintenance cost is greatly reduced and the stability of the equipment is increased.

## 双组份自动打胶机混胶系统及提速创新

目前所有自动打胶机的原理均是将两种胶按比例压入一混胶容器静态混胶。A、B组份胶在混合时都是通过胶枪进行混合，随着混合胶的稠度升高混合效果随之下降。这种被动的混胶方式有如下缺点：混胶比例不稳定，不能完全稳定的实现A、B胶以标准体积比混合，造成最终封装的中空玻璃质量不稳定；胶的流速低、出胶量少，容易堵塞胶枪，需要经常中断以清洗胶枪，平均一天至少换两次胶枪，效率低下；需要较大的供胶压力，导致各部件寿命不高；对齿轮供胶泵的要求极高，需频繁更换齿轮泵，维护成本高。



### 大小桶通用丁基胶机与传统丁基胶机相比较，有如下几点优势：

Compared with traditional butyl adhesive machine, barrel butyl adhesive machine has the following advantages:

1、技术优势：是国内既有大桶丁基胶机研发和生产能力，又能提供高端大桶丁基胶的厂家，并且我们生产的大小桶通用丁基胶机可灵活转换使用，不影响生产，保证了生产的延续性。

Technical advantages: The company which has the R&D and production capacity of large barrel butyl rubber machine, but also can provide high-end large barrel butyl rubber in china, and our production of large and small barrels of universal butyl rubber machine can be used flexibly, does not affect the production, to ensure the continuity of production.

2、节省用胶成本，提高生产效率：节省了换胶时间，大桶丁基胶比同等重量的小桶丁基胶可节省换胶时间5个小时，提高了生产效率，增加了公司产能。

Save cost, improve production efficiency: It can save 5 hours of glue changing time by comparing large barrel butyl glue with small barrel butyl glue of the small weight, improve the production efficiency and increase the production capacity of the company.

3、实用功能：无气泡胶产生，流畅性更佳、产品更加美观，延长了中空玻璃寿命。

Using function: No butyl gum, better fluency, more beautiful products, prolong the life of insulating glass.

4、节能降耗：比国内同类大桶丁基胶机省电10千瓦，我公司大桶丁基胶机只耗电4.5千瓦，国内同类丁基胶机耗电15千瓦。

Energy-saving and Cost-reducing: Compared with similar domestic large barrel butyl rubber machine power saving 10 kilowatts, our company large barrel butyl rubber machine power consumption only 4.5 kilowatts, domestic similar butyl rubber machine power consumption 15 kilowatts.

5、出胶量稳定、均匀：保证了铝条两侧丁基胶宽度、厚度一致，既美观又保证密封效果更好。

Glue output is stable and even: ensure both sides of the aluminum strip butyl glue width, thickness consistent both beautiful and ensure better sealing effect.

6、外界影响：温度恒温，不受外界环境温度影响，避免了小桶丁基胶机避免更改参数的弊端。

External influence : Constant temperature, not affected by the external temperature, avoid the small barrel butyl adhesive machine frequently change the parameters.

7、产品稳定：与南玻集团共同研发，经过南玻，耀皮，台玻等公司30多条线多年的验证，保证了产品的稳定性。

Product quality remained stable: With the joint research and development of the CSG group, through the CSG, YAOPI, Taibo group and other companies more than 30 years of line verification, to ensure the stability of the production.

**预处理** 所有表面必须干净、干燥和无油腻。

Pre-processing All surfaces must be clean, dry and free of grease

## 节能 Energy-Efficient

暖边间隔条是由高强度复合材料和不锈钢复合而成的创新型产品,其中采用的复合材料的热导率接近铝的1/1000,其传热系数比传统的铝制间隔条至少低0.1w/m<sup>2</sup>k,最少可降低0.3w/m<sup>2</sup>k,完善了中空玻璃边缘的隔热性能,有效防止结霜,有效节能,最多能节省5%的供暖费用及空调费用,经济实惠的同时,还能减少CO<sub>2</sub>的排放量,实现环保。

Warm edge spacer is made of high-strength composite materials and stainless steel composite products, which adopt the thermal conductivity of composite material is close to 1/1000, its heat transfer coefficient is lower than traditional aluminum spacer at least 0.1w/m<sup>2</sup>k, and even reduce 0.3w/2k, improve the heat insulation performance between the edge of the hollow glass, effectively prevent the frost, effective energy saving, can save up to 5% of the cost of heating and air conditioning costs, economical at the same time, also can reduce emissions of CO<sub>2</sub>, achieve environment protection.

## 舒适 Comfortable

由于暖边条具有更好的隔热性,因此玻璃边缘的温度将更高。这可以明显的减少结露的形成,从而避免在窗户上形成有害健康的霉菌。较高的玻璃边缘温度同时还能减少热量的散失,增进室内舒适性。

Since the warm edge spacer have better insulation, the edge of the hollow glass will be hotter. This can significantly reduce the formation of condensation, the avoiding the formation of harmful mold on the windows.

## 美观 Beautiful outlook

采用品质塑料,拥有独特丰富的色系,可完美装饰每扇窗户和每个房屋立面。犹如丝绒般的外观效果,无金属表面反光,更具有吸引力。

It's made of high-quality plastic with unique and rich color series, which can perfectly decorate every window and every house facade as if velvet appearance effect, without metal surface reflection, more attractive.


## 物理特性 Physical characteristics

我公司生产的暖边条是一款高强度复合材料和不锈钢复合而成的创新型产品，不仅能密封填充密封气体，还能很好的粘附所有中空玻璃的密封材料，其机械性能和热性能能够持续耐受100°C的高温。

The warm edge spacer produced by our company is an innovative product made of high-strength composite material and stainless steel. It can't seal and fill the sealing gas, but also better adhere to all insulating glass sealing materials. Its mechanical and thermal properties can withstand the high temperature of 100°C degrees.



独特的复合材料与不锈钢的完美结合，使具在拥有超低导热特性的同时还确保了中空玻璃的水密性和气密性，从而保证了中空玻璃的使用寿命。

The perfect combination of unique composite materials and stainless steel ensure the water tightness and air tightness of insulating glass while providing ultra-low thermal conductivity, thus guaranteeing the service life of insulating glass.

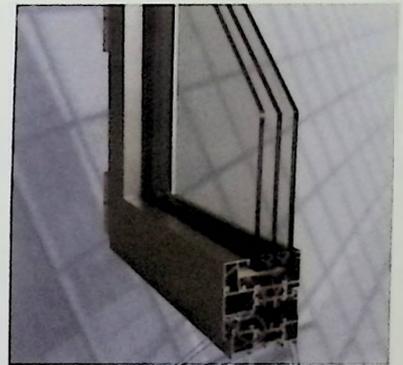


隔热条

暖边间隔条

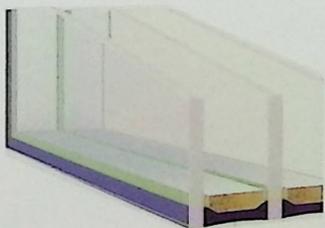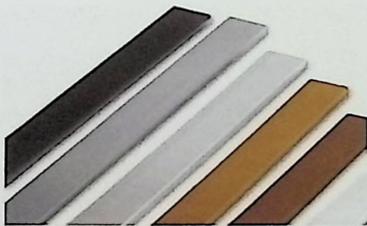

暖边间隔条

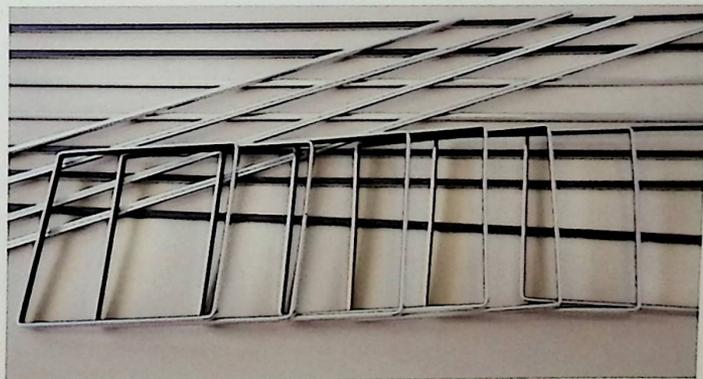

暖边间隔条

暖边条是带有分子筛的塑性暖边系统,完全取代了由分子筛、第一道胶和间隔条构成的传统边框系列。暖边条能够跟玻璃硅酮胶产生化学粘接,这也是暖边条为什么特别用于幕墙的原因。



The warm edge spacer is a plastic warm-side system with molecular sieves.It completely replaces the traditional frame series of warm-side strips composed of molecular sieves,the first glue and the spacer strip.the warm-side strip can be chemically bonded to the glass silicone adhesive.

粘结力和密封剂正越来越多被用于日常生活,成为门窗制造领域不可缺的组成部分。无论是在玻璃装配还是直接将中空玻璃粘接入窗框。粘接剂和密封剂已经在中空玻璃制造中扮演重要角色。在节能方面,热塑性间隔条变得越来越重要。使用施尔乐系列产品会使您获得顶级的“暖边”系统。

Cohesive force and sealants are increasingly used in daily life,become an integral part of doors and windows manufacturing field,whether in the structure of glass assembly or directly to the hollow glass bonded into the frame adhesive and sealants has play an important role in the manufacture of hollow glass in relation to energy efficiency,thermoplastic article interval is becoming more and more important to use Sealer series products will make you get warm side of the distribution system.

施尔乐superspace是一种完全代替间隔条、一道密封及分子筛干燥剂并在玻璃和硅酮胶结构之间可以产生化学粘结力的热塑性暖边系统。

Sealer superspace is a thermoplastic warm edge system that completely replaces the spacer strip as a seal and the molecular sieve as a desiccant and creates a chemical bond between the glass and the silicone structure.

在粘结剂和密封剂领域,施尔乐是您经验丰富并且值得信赖的伙伴。施尔乐暖边系列产品的高性能中空玻璃的制作过程中建立了高品质的标准。除了实现自动化中空玻璃的生产,还提供了众多的商业和计数优势。

In the field of adhesives and sealants,Sealer is your experienced and reliable partner in the production of high performance insulating glass scherer warm edge products.


施尔乐暖边系统产品被广泛用于建筑和运输业的中空玻璃并且针对每种应用为您提供相应的解决方案。

Sealer warm edge systems are widely used in construction and transportation of insulating glass and for each application to provide you with the appropriate solutions.




## 产品特点 Product Feature

- |   |   |
|---|---|
| <p>1、带有干燥剂的热塑性间隔条<br/>Thermoplastic spacer with desiccant</p> <p>3、可以被加工成任意的形状<br/>Can be processed into any shape</p> <p>5、极低的水汽和惰性气体透过率<br/>Extremely low moisture and inert gas permeability</p> <p>7、低热传导性<br/>Low thermal conductivity</p> <p>9、玻璃和硅酮胶之间可以产生化学粘合力<br/>Chemical adhesion can be formed between glass and silicone</p> | <p>2、取代间隔条，一道密封胶分子筛<br/>Instead of a spacer, seal the molecular sieve together</p> <p>4、对玻璃有很快的亲润性<br/>It has a quick moistening effect on glass</p> <p>6、高弹性、使用寿命长<br/>Good flexibility, long service life</p> <p>8、可用于树脂夹层玻璃的制造<br/>It can be used in the manufacture of resin laminated glass</p> <p>10、特别用于炎热地区的结构装配幕墙<br/>Especially used in hot area of structural assembly curtain areas</p> |
|---|---|

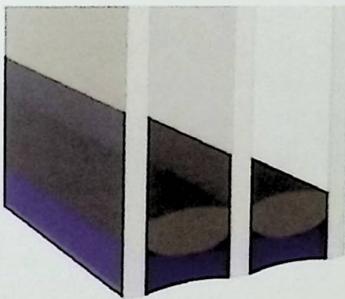

暖边条热塑性产品被方便地直接涂覆到玻璃上，之后用适合的二道密封胶直接密封。

The warm side strip thermoplastic product is conveniently coated to the glass in diameter and then sealed with a suitable two sealant diameters.

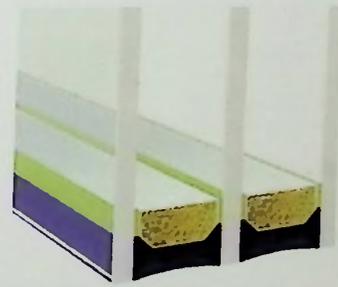


传统的中空玻璃结构使用带分子筛填充的刚性间隔框结构，两边涂覆丁基胶并置于玻璃上，最好用二道密封胶密封。

The traditional hollow glass structure uses a steel spacer structure filled with molecular sieve. the two sides are coated with butyl glue and placed on the glass. it is best to seal with two sealants.


宇光施尔乐GSG是含有干燥剂的反应型暖边间隔密封胶，智能制造，连续化在线一次成型。它完全取代了由分子筛、丁基胶和间隔条构成的传统边框系统。宇光施尔乐GSG与玻璃和聚硫胶、硅酮结构胶均产生化学粘接，因此特别适用于幕墙、门窗。

Yuguang Sealer GSG is a reactive warm edge spacer sealant with desiccant. It is intelligent manufacturing and continuous online one-time molding. It completely replaces the traditional frame system composed of molecular sieve, butyl rubber and spacer strip. Yuguang Sealer GSG has chemical bonding with glass, polysulfide adhesive and silicone structural adhesive, so it is especially suitable for curtain walls, doors and windows.

产品 Product	宇光施尔乐 GSG Yuguang Sealer GSG
颜色 Color	黑色 Black
包装规格 Package specification	200kg/桶 200kg/Bucket
环境适用温度 Applicable ambient temperature	-70°C ± 90°C -70°C ± 90°C
粘接玻璃方式粘贴机理 Bonding mechanism of glass	化学粘接 Chemical bonding
可配合使用的二道胶 The second glue that can be used together	聚硫胶 + 硅酮结构胶 Polysulfide + silicone structural adhesive
应用领域 Application area	门窗、幕墙及其他相关领域 Doors, windows, curtain walls and other related fields

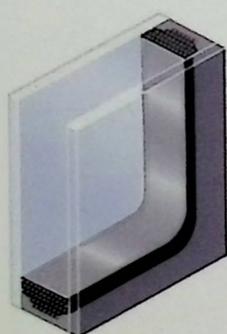

传统铝条结构  
由3部分组成：铝条、分子筛和丁基胶

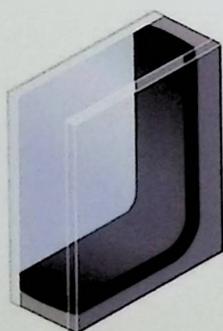

TPS结构  
只有1部分：TPS



随着人民生活水平的提高和对美的追求本公司推出隐形连接装饰隔条系列产品。中空玻璃铝装饰条（简称：金属装饰条、铝装饰条、装饰条）是针对中空玻璃的装饰，美观性能专门开发出来的一种装饰制品。


With the improvement of people's living standards and the pursuit of beauty the company launched invisible connection decorative partition series products.hollow glass aluminum decoration strip is a kind of decoration product specially developed for the decoration of hollow glass and its beautiful performance.

中空玻璃装饰条（金属装饰条、铝装饰条、装饰条）是以金属为原材料，表面经处理后，根据不同的客户要求制作成各种规格、各种颜色的装饰条，具有强度高，耐老化、抗紫外线、不变形、不褪色等优点，实用于塑钢铝合金门窗及中空玻璃装饰条，高雅、大方、气度非凡，高档塑钢门窗配上亮丽多彩的装饰隔条，给人以一种豪华舒心的感觉。

Hollow glass decorative article is based on the metal raw material,the surface after treatment,made into various specifications according to different customer requirements,the adornment of all sorts of colors,high strength,ageing resistance,resistance to ultraviolet ray,changeless form,do not fade,is suitable decoration to the model steel window of aluminum alloy door of hollow glass,elegant,generous,tolerance,especially high-grade of window of model steel door with bright and colorful decoration article,give a person the sense with a luxurious comfort.

中空玻璃条适用于塑钢、铝合金、铝包木、木包铝等门窗及玻璃幕墙中，产品颜色、RAL国标色卡及物佳攀士专业覆膜色卡（木纹色、金属色）任选其一，另外还可以根据不同客户的不同需求使产品达到双色的效果，产品分类有：大胆创意的欧式风格，型艺材韵的经典仿古，引领潮流的时尚现代以及韵味独特的异域风情。

Insulating glass bar is suitable for windows、doors、windows and glass curtain walls of plastic steel,aluminum alloy,aluminum clad wood,wood clad aluminum,etc.Product color RAL international color card and material good PANSHI professional covered film color card are optional.in additional,according to different customer needs,the products can achieve the effect of double colors.Bold and creative European style,classical archaize of artistic material rhyme,leading to the trend of modern fashion and unique exotic flavor.

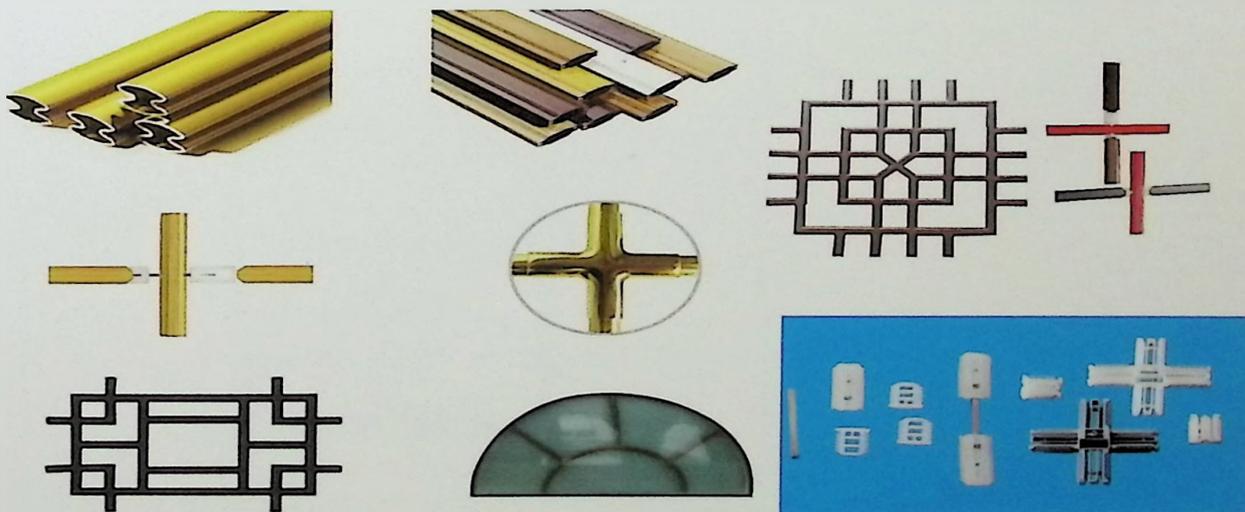

# H 中空玻璃专用铝环、尼龙环、刮角棉


ollow glass aluminum ring, nylon ring, scraping Angle of cotton



点驳尼龙环  
Hollow Nylon ring




点驳铝环  
Hollow aluminum ring

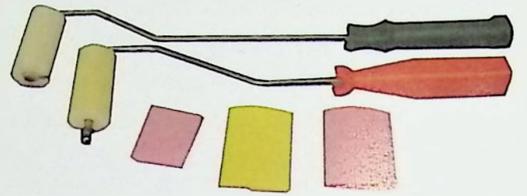


刮胶棉 30\*40 30\*65 刮胶海绵轮  
Glue-cleaning sponge Rolling wheel cleaning sponge




皮带清洗机/毛刷  
Cleaning machine of belt/hairbrush

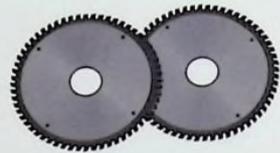


不锈钢锯片  
Stainless steel saw blade

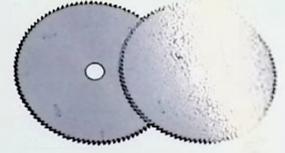


合金锯片  
Alloy saw blade

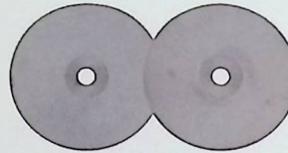


钨钢锯片  
Tungsten steel saw blade

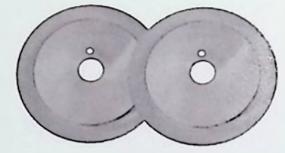


高速钢锯片  
High speed hacksaw blade

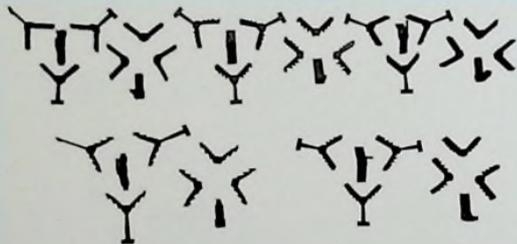

暖边/普通黑/灰充气孔角插  
Warm edge/Black/Grey inflatable hole angle plug-in

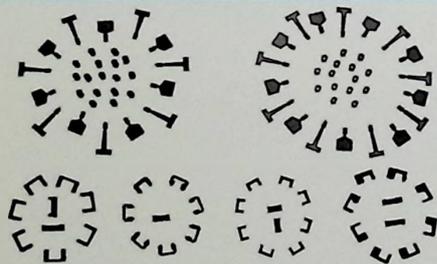

黑/灰充气孔豆/片/限位块  
Black/Grey inflatable hole kit/stop block

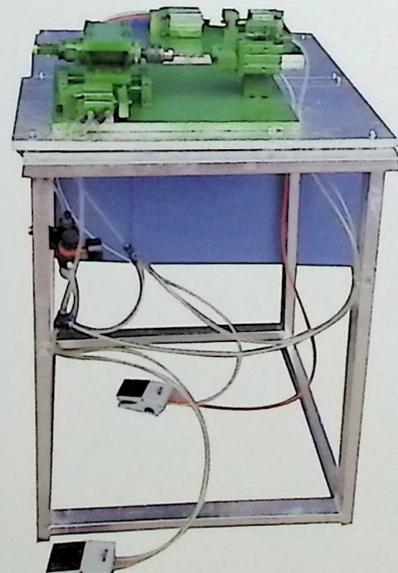


充气孔打孔机  
Perforating machine




# 中空暖边直插件 角插件

ollow warm edge straight plug-in and corner plug-in

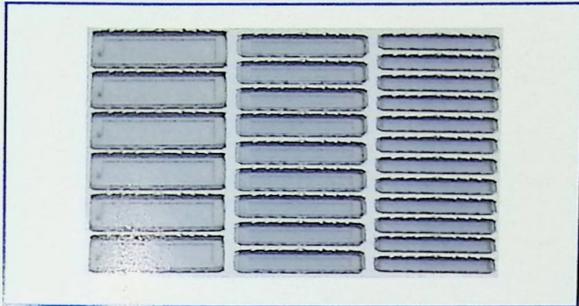


普通直插件

Steel straight plug-in

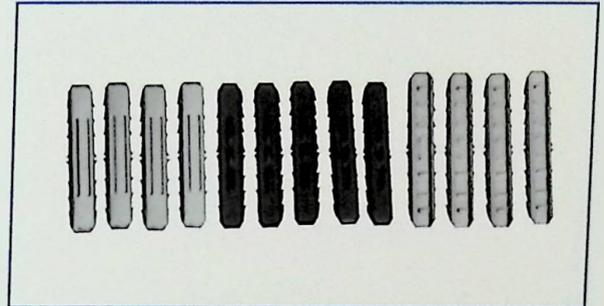


暖边直插件

Warm edge spacer plug-in

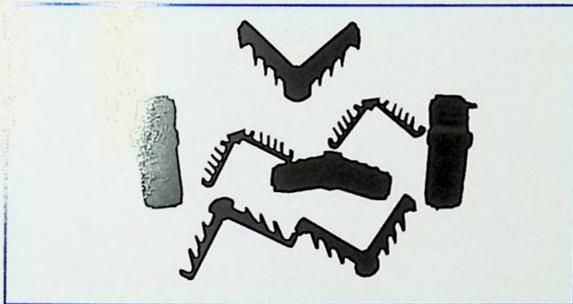


暖边泰诺风角插

Technoform angle plug

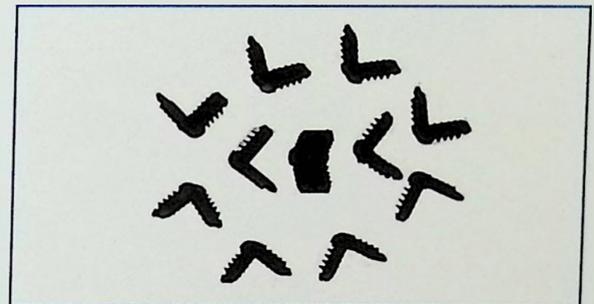


三面齿暖边角插件

Three sides teeth warm edge angle plug

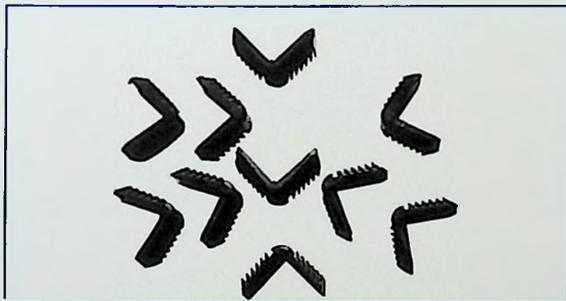


暖边阿鲁普角插

Arup

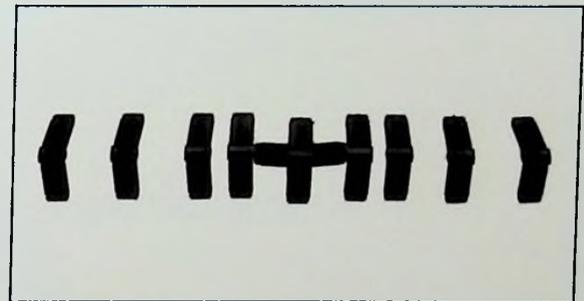


52mm暖边角插件

52mm warm edge angle plug

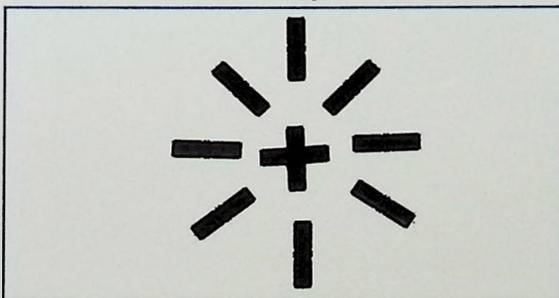

塑料直插件

Plastic spacer plug-in

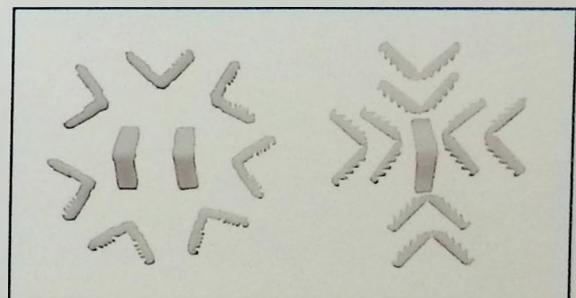

白色/软角插件


White/soft angle plug

**B** 丁基胶、四边磨、双边磨、密封胶线各种同步带  
 butyl rubber, quads, bilateral grinding, sealing glue line all kinds of synchronous belt



除膜机皮带

The belt of remove coated-glass machine

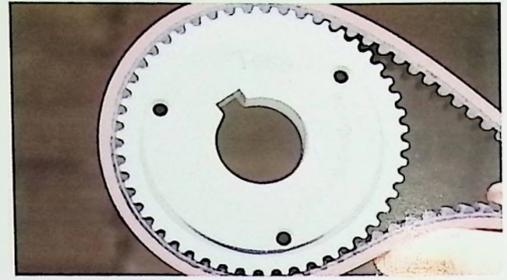


双边磨同步齿轮

Synchronous gear of bilateral grinding




丁基胶皮带

The belt of Butyl rubber coating machine

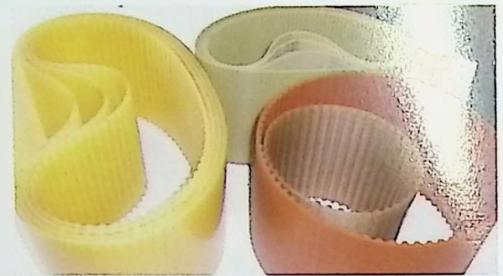

除膜机皮带  
The Belt

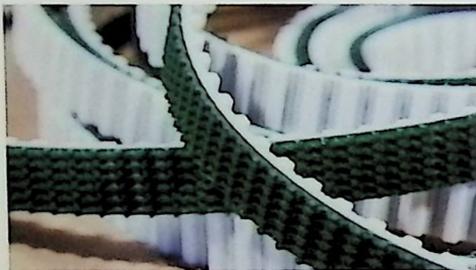

切割机皮带


The belt of Cutterbar



自动打胶机同步带


Simultaneous belt of automatic gluing machine

68AT10-5160  
68AT10-6300  
68AT10-7600

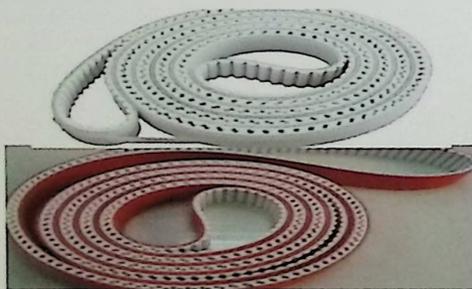

双边磨皮带

The belt of Synchronous gear

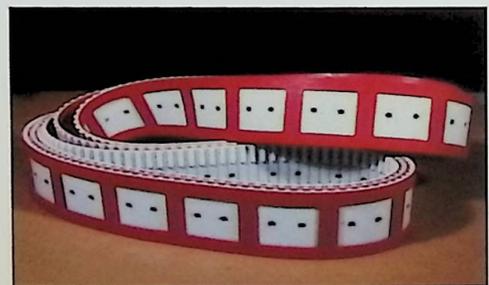


四边磨皮带


The belt of All-round grinding

# P 双组份打胶机配件产品展示


## RODUCTS DISPLAY

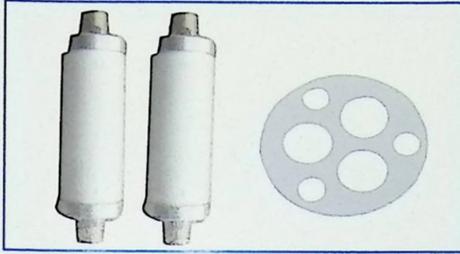

YG-001 昌益和铝制混胶器三孔垫  
Aluminum Glue Mixer  
200/135/45.5\*0.5

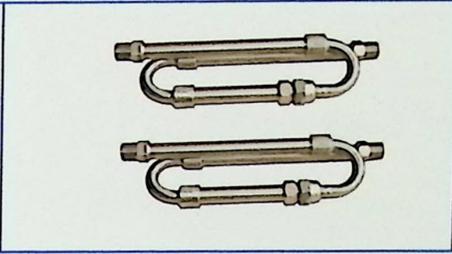


YG-002 昌益和不锈钢混胶器  
Stainless steel glue mixer

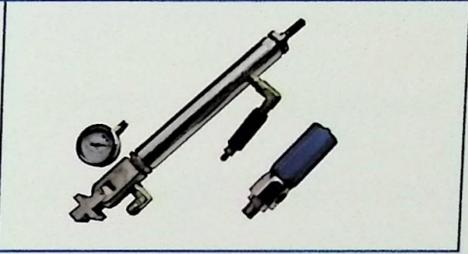


YG-003 手动黑胶安全阀  
昌益和配比泵  
Safety Valve/Proportion pump




YG-004 昌益和支架回转器  
Bracket Gyrotor  
150\*60

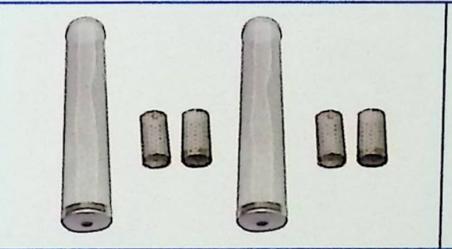


YG-005 昌益和大/小过滤网  
Filter screen  
145\*25、31\*18

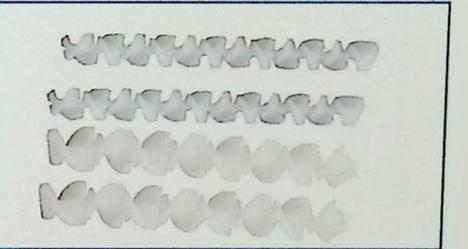


YG-006 昌益和塑料混胶棒  
Plastic glue mixer core  
138\*20\*8/128\*12.5\*12

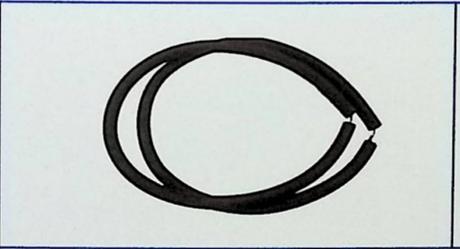


YG-007 昌益和大胶盘密封  
Rubber disc seal  
1.8米\*36

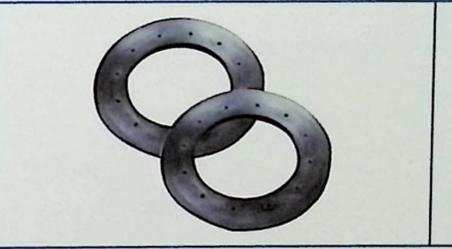


YG-008 昌益和小胶盘密封  
Rubber disc sealing  
320\*195\*7

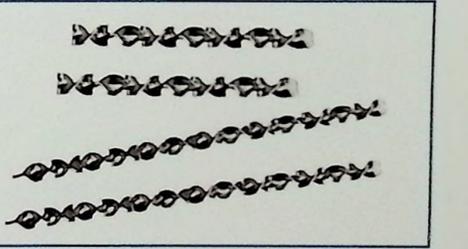


YG-009 昌益和不锈钢混胶芯  
Stainless steel glue mixer core  
210\*11.5\*16/128\*12.5\*10

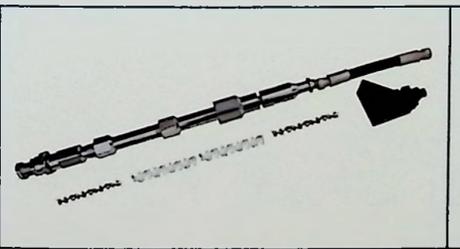

YG-010 昌益和自动涂胶总成  
Automatic glue coated assembly device

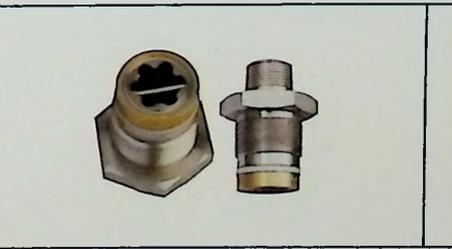


YG-011 昌益和入口螺栓  
Inlet Bolt

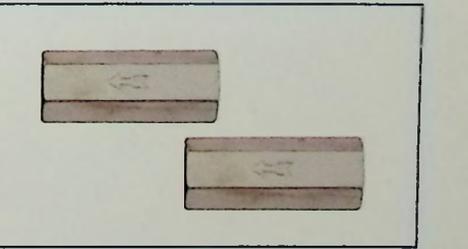


YG-012 昌益和单向阀  
Single valve  
40\*16

# P 双组份打胶机配件产品展示


## RODUCTS DISPLAY

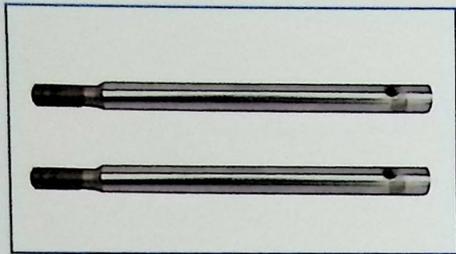

YG-013 昌益和配比泵活塞杆  
Piston rod of proportioning pump  
244\*18

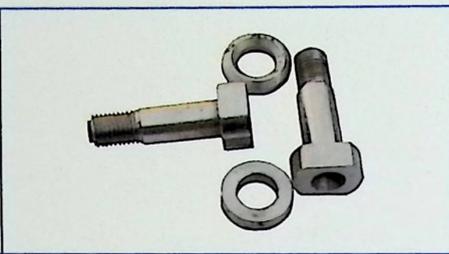

YG-014 昌益和配比泵活塞头/适配器  
Piston head / adapter of proportioning pump  
55\*11.8\*21/24.5\*13.5\*12.2

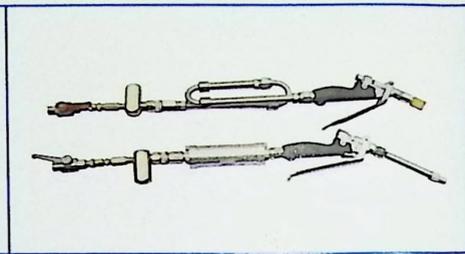


YG-015 昌益和涂胶总成  
Glue coated assembly device




YG-016 昌益和黑/白胶管/接头  
Black /white rubber hose / adapter sleeve  
2.5米/6.5米




YG-017 昌益和吸入/定位法兰/隔套  
Position device for pipe's flange/Spacer sleeve

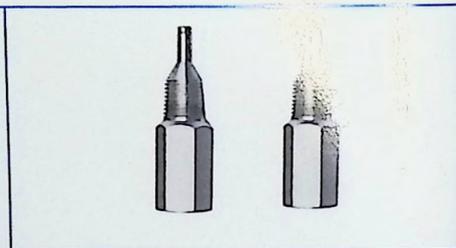


YG-018 昌益和针阀  
Needle valve  
63\*17

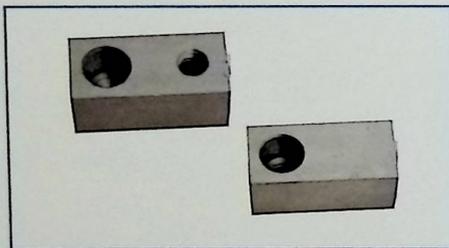


YG-019 昌益和混合块  
Mixing blocks  
70\*33

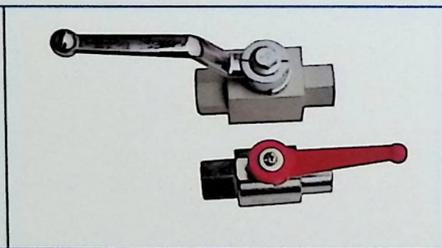


YG-020 昌益和高压球阀  
High pressure valves

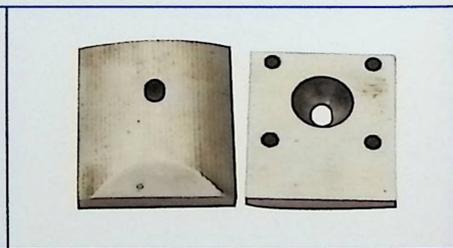


YG-021 昌益和自动胶嘴  
Automatic nozzle  
46\*38

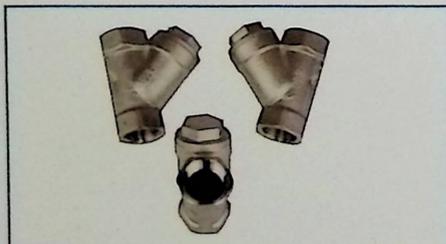

YG-022 昌益和Y型过滤网总成  
Y-shaped bolt

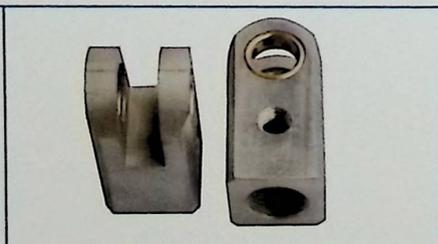


YG-023 昌益和配比泵入口座  
Locking block

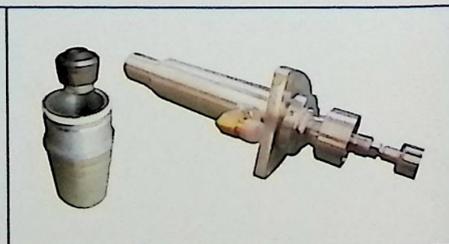


YG-024 昌益和白胶泵/主泵入口座  
Main pumps

# P 双组份打胶机配件产品展示


## RODUCTS DISPLAY

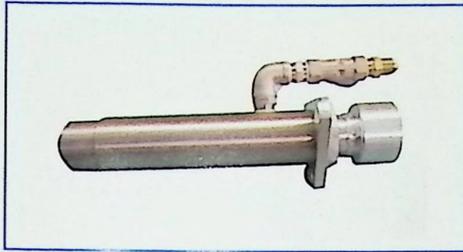


YG-025 昌益和辅料泵  
Auxiliary pump

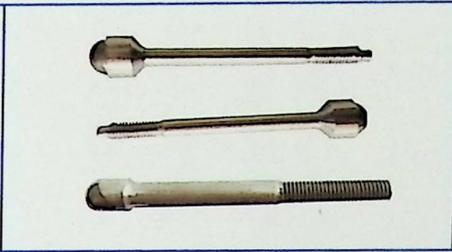


YG-026 进口/国产枪针  
Gun Fittings

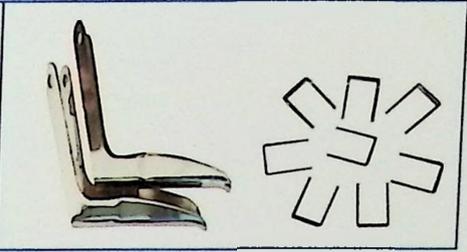


YG-027 枪扳机/枪拨叉  
Gun Fittings

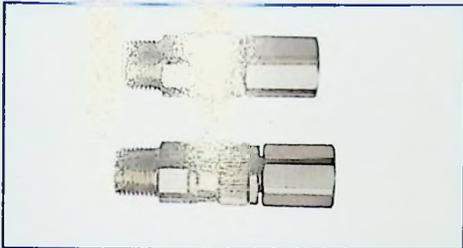


YG-028 进口小活节  
Articulated joint  
77/90\*20.8\*18.6

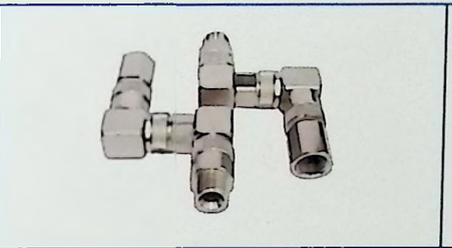

YG-029 进口万向节  
All-round rotatable joint

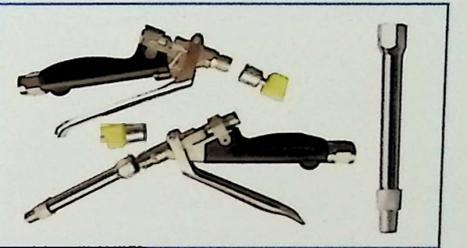


YG-030 进口/国产胶枪  
MK Kroger

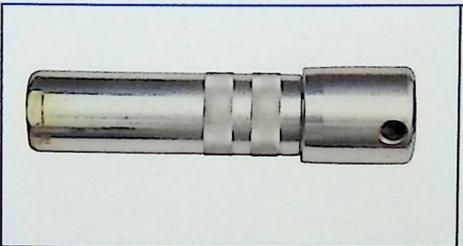


YG-031 昌益和大过滤器  
Great Filter




YG-032 昌益和辅料泵小马达  
Auxiliary pump motor

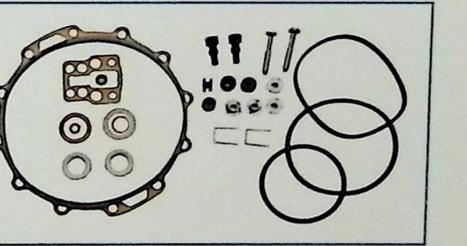


YG-033 昌益和马达维修包  
Service kit

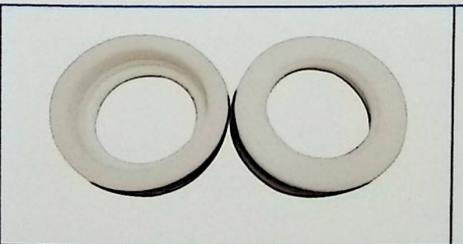

YG-034 昌益和主泵马达上密封  
CYH hydraulic motor on seal  
41.6\*25\*46\*10.6

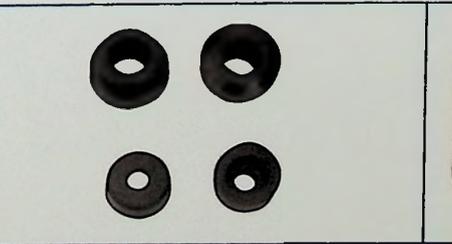


YG-035 马达密封  
Hydraulic motor seal

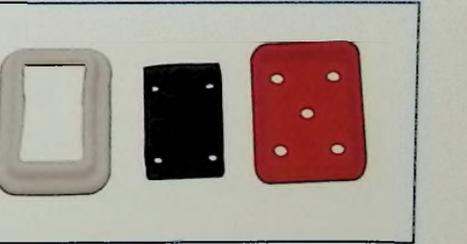

YG-036 昌益和辅助小吸盘  
Glass suction tray

# P 双组份打胶机配件产品展示


## RODUCTS DISPLAY ●●●●●

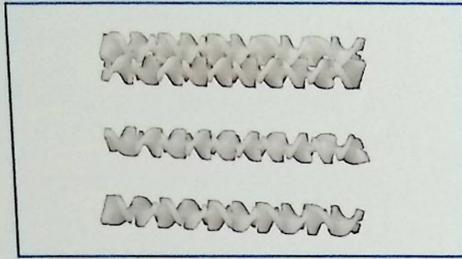


YG-037 昌益和混胶芯  
Mixed rubber core  
135\*15.8\*10




YG-038 昌益和大过滤芯/过滤网  
Great filter element/filter screen

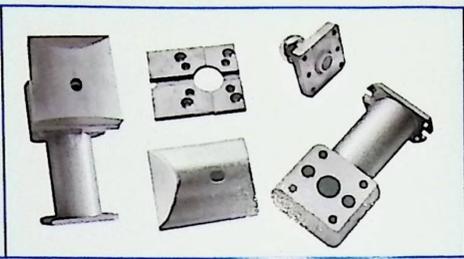


YG-039 昌益和胶嘴总成  
Rubber mouth

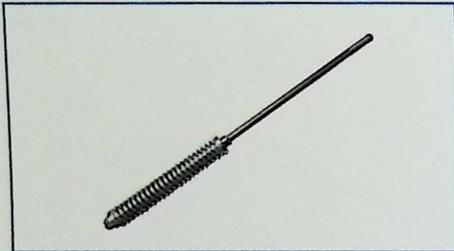


YG-040 昌益和主马达换向杆  
Reverse rod

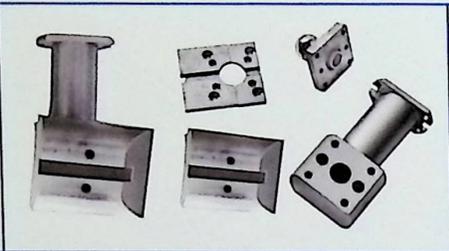


YG-041 昌益和三玻两腔胶嘴  
Multi-function rubber nozzle

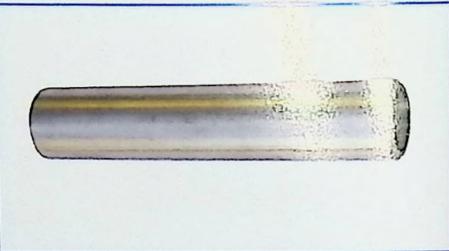


YG-042 昌益和配比泵钢筒  
Steel cylinder of proportioning pump

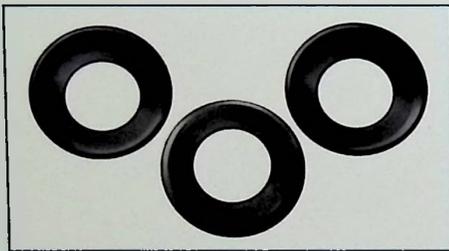


YG-043 昌益和单立柱皮碗  
Sealing

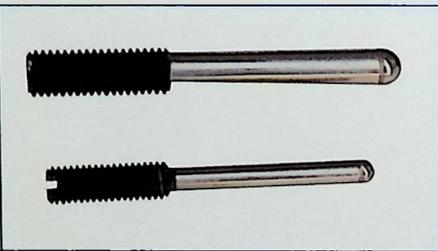


YG-044 昌益和自动封针  
Gasket roller pin

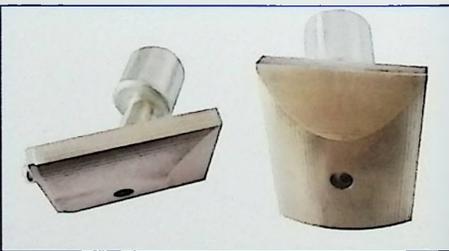


YG-045 昌益和新式胶嘴  
Rubber mouth

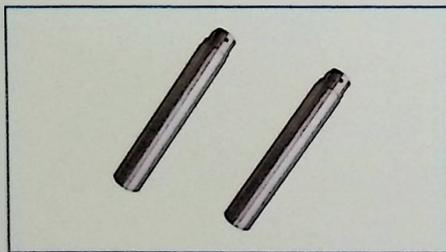

YG-046 昌益和主泵活塞杆  
Piston rod of main pump

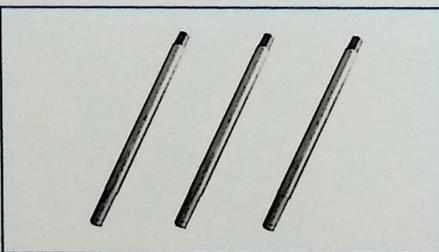


YG-047 昌益和白胶泵吸入活塞杆  
Suction piston rod of white rubber pump

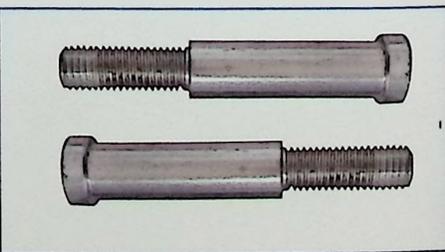


YG-048 昌益和主泵连接杆  
Main pump connecting rod

# P 双组份打胶机配件产品展示


## RODUCTS DISPLAY

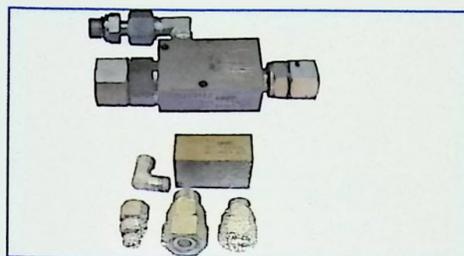


YG-049 李赛克三通块  
Lisecc T-junction block

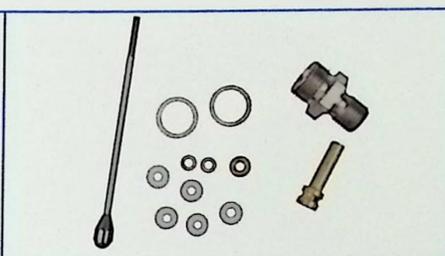


YG-050 李赛克枪针/阀座/密封  
Lisecc gun needle / valve seat / sealing

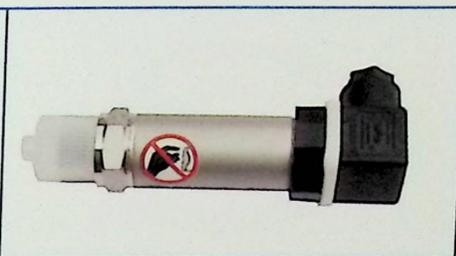


YG-051 李赛克光电传感器  
Lisecc photoelectric sensor

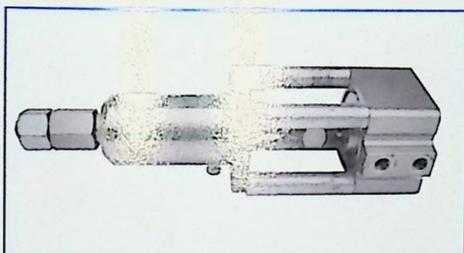


YG-052 李赛克气动阀  
Lisecc pneumatic valve

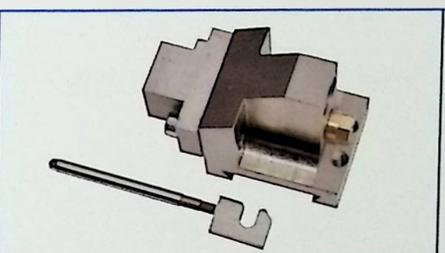


YG-053 李赛克开胶阀  
Lisecc opening valve

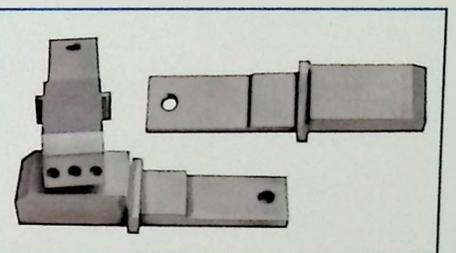


YG-054 李赛克保险  
Lisecc safety block

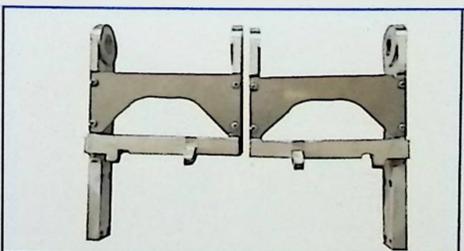


YG-055 李赛克左右支架  
Lisecc scaffold

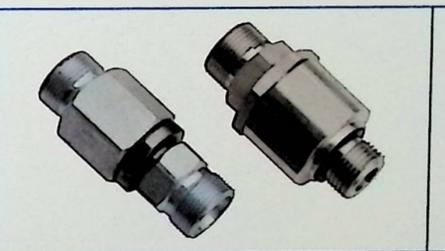


YG-056 李赛克小活节  
Lisecc Articulated joint

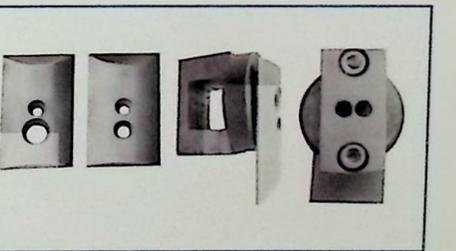


YG-057 李赛克自动胶嘴  
Lisecc Automatic glue nozzle

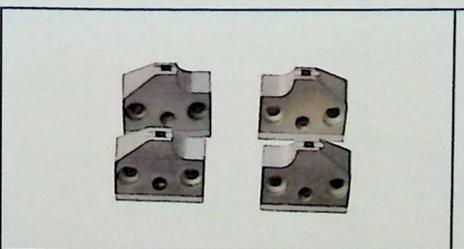


YG-058 李赛克丁基胶嘴  
Lisecc butyl rubber machine nozzle

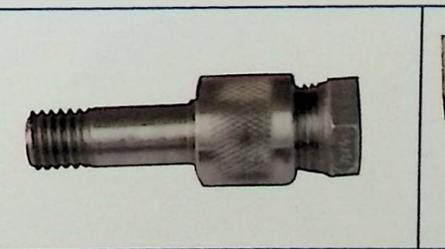


YG-059 李赛克枪头  
Lisecc Glue gun head

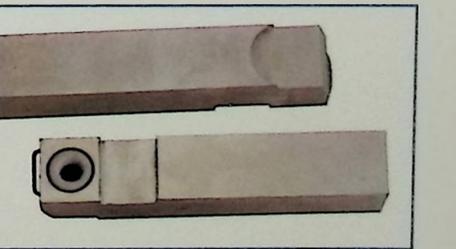


YG-060 李赛克出胶嘴  
Lisecc rubber outlet nozzle

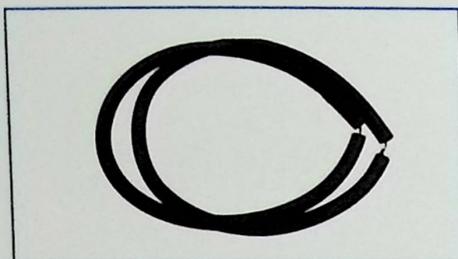


YG-061 李赛克胶盘密封  
Lisec Rubber disc sealing

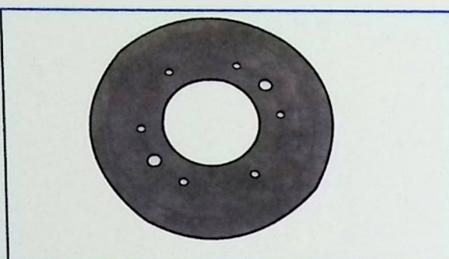


YG-062 李赛克胶盘密封  
Lisec Rubber disc sealing

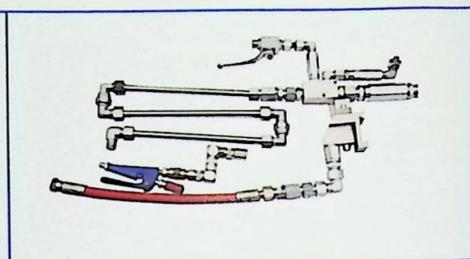


YG-063 李赛克涂胶总成  
Lisec Glue coated assembly device

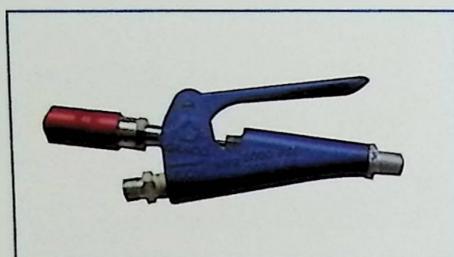


YG-064 李赛克胶枪  
Lisec MK Kroger

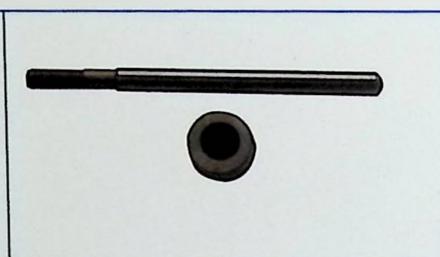


YG-065 李赛克封针/阀座  
Lisec seal the needle

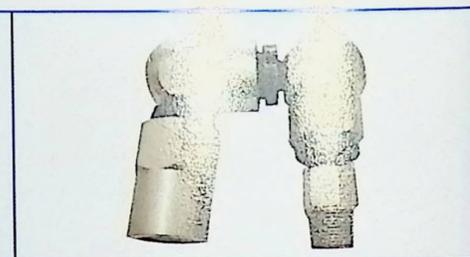


YG-066 李赛克万向节  
Lisec All-round rotatable joint

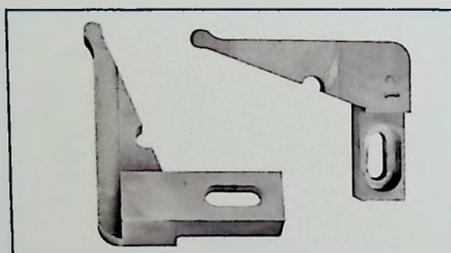


YG-067 李赛克刀头  
Lisec Cutter head

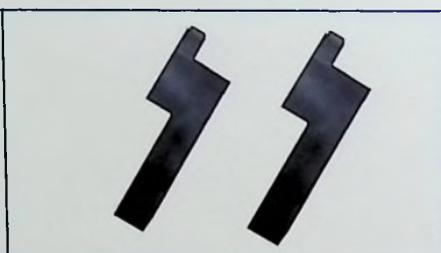

YG-068 李赛克刀头  
Lisec Cutter head

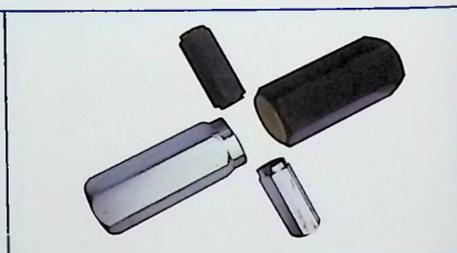


YG-069 李赛克单向阀  
Check valve

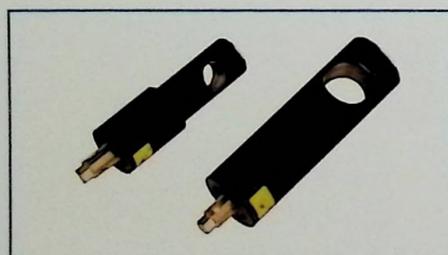

YG-070 李赛克气缸锁  
Cylinder assembly




YG-071 李赛克链条  
Lisec chain

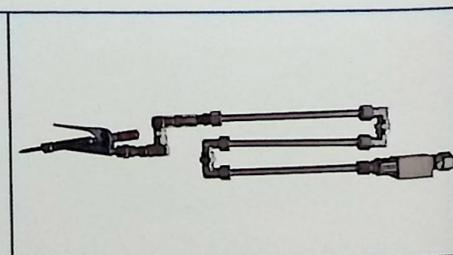


YG-072 李赛克手动打胶机总成  
Lisec manual gluing machine assembly




YG-073 李赛克接头  
Liseck Connector

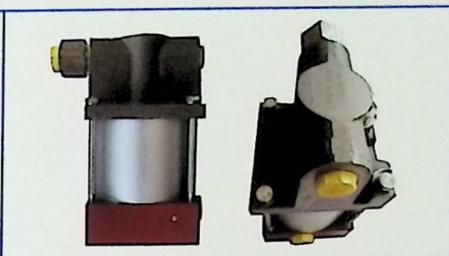


YG-074 李赛克增压泵  
Liseck Booster pump

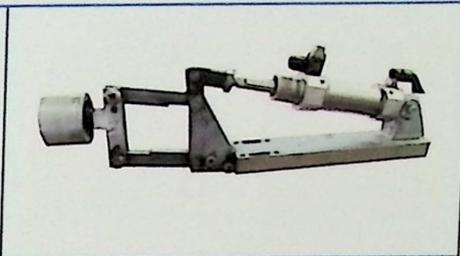


YG-075 李赛克丁基压轮基座  
Base of butyl roller

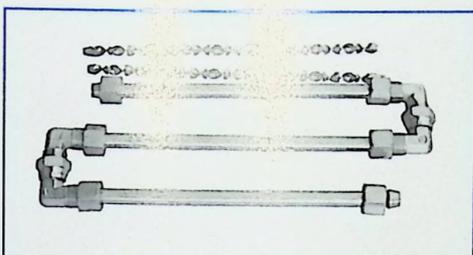


YG-076 李赛克混胶器  
Liseck Glue mixer device

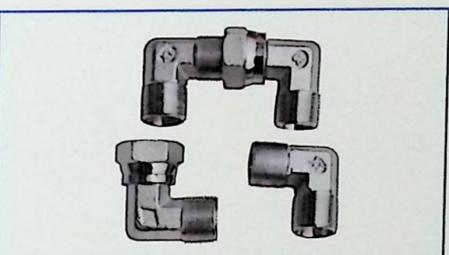

YG-077 李赛克弯头  
Liseck Elbows

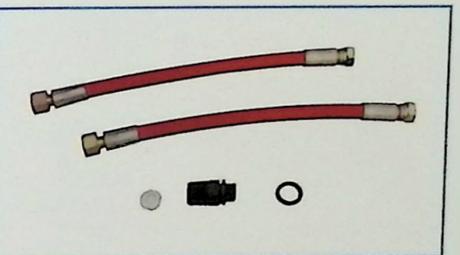


YG-078 李赛克胶管  
Liseck Rubber pipe

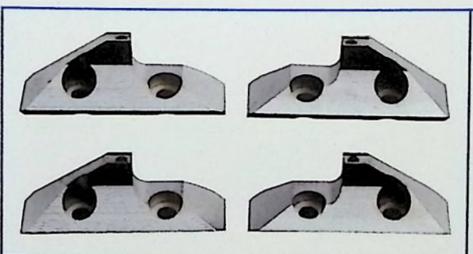


YG-079 百超丁基胶嘴  
Bystronic butyl rubber machine nozzle




YG-080 百超支架回转器  
Bystronic Bracket Gyrotor

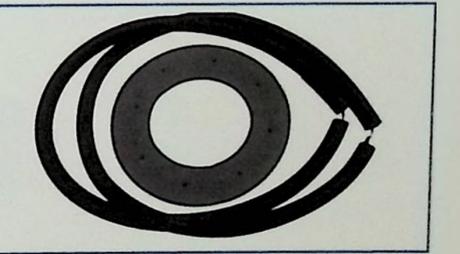


YG-081 百超胶盘密封  
Bystronic rubber disc sealing

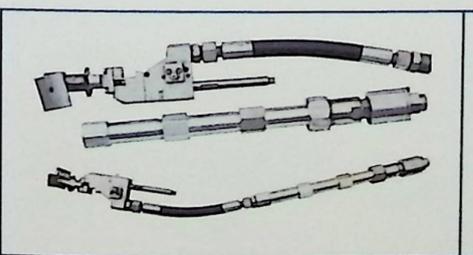


YG-082 百超涂胶总成  
Bystronic Glue coated assembly device

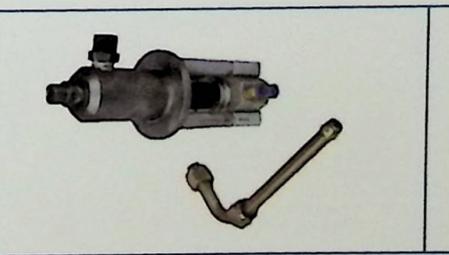


YG-083 百超气动阀  
Bystronic pneumatic actuating valve

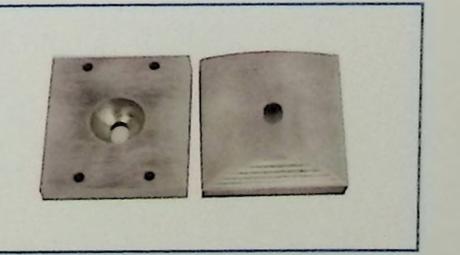


YG-084 百超自动胶嘴  
Bystronic Automatic glue nozzle

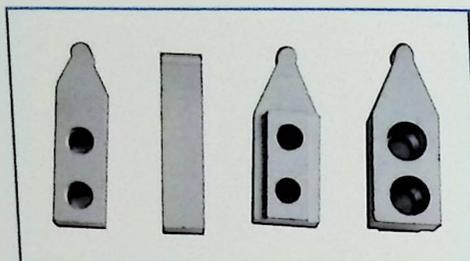


YG-085 特能新式/老式刀头  
 Bending cutter head(Old/New)

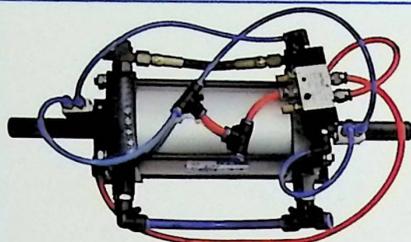


YG-086 国产增压泵  
 Domestic booster pump

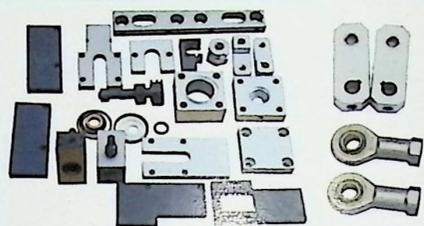


YG-087 特能打胶机配件  
 The accessories of coating machine

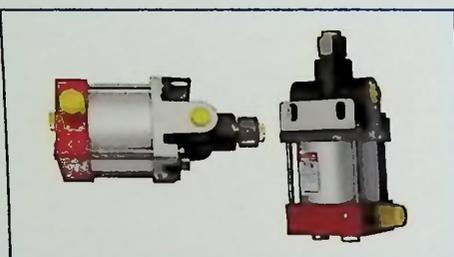


YG-088 特能德国进口增压泵  
 Booster pump

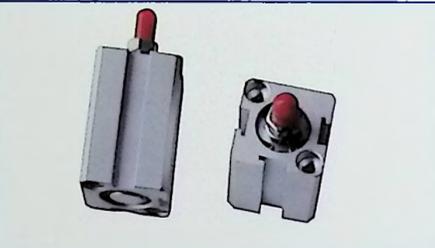


YG-089 薄型气缸  
 Thin cylinder

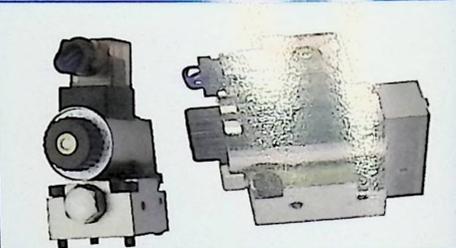


YG-090 特能球式电磁阀  
 Magnetic valve

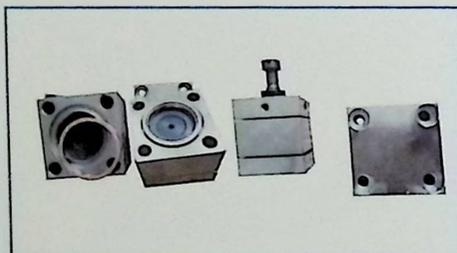


YG-091 特能丁基胶机小油缸  
 Miniature cylinder

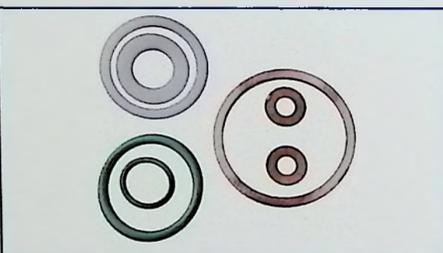


YG-092 油缸密封  
 Cylinder seal ring

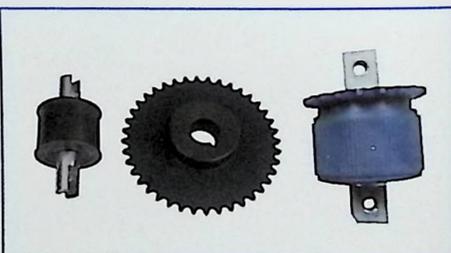


YG-093 特能丁基胶机主动、  
 从动、张紧轮  
 Wheel gear

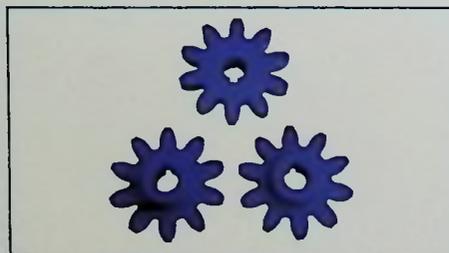


YG-094 特能蓝色齿轮  
 Blue gear

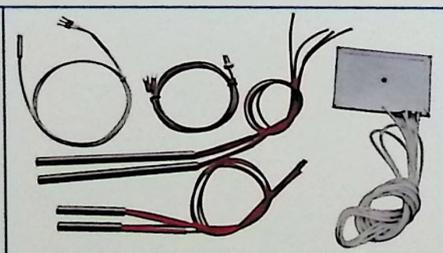

YG-095 加热棒/加热板/热电偶  
 Heating rod/Heating plate/Thermocouple

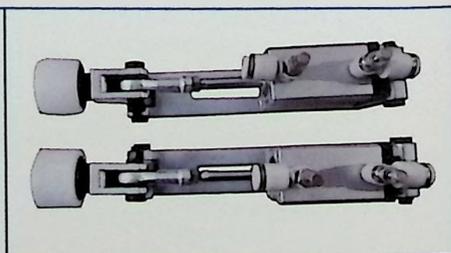


YG-096 特能丁基胶机压轮气缸总成  
 Butyl rubber machine pressing wheel assembly

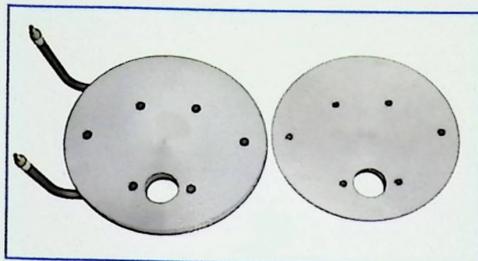


YG-097 特能加热盘/铝盘  
Tenon heating plate/Aluminum disc series




YG-098 特能开胶阀  
Butyl rubber machine valve

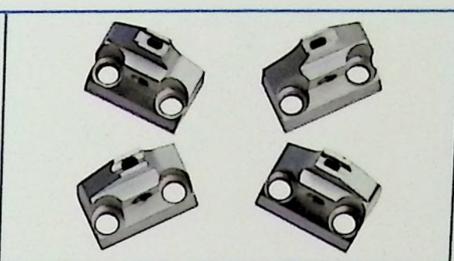


YG-099 特能丁基胶嘴孔距20/15  
Butyl rubber machine nozzle

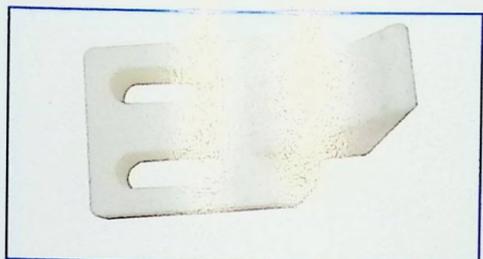


YG-100 特能铝框定位块  
Machine stock

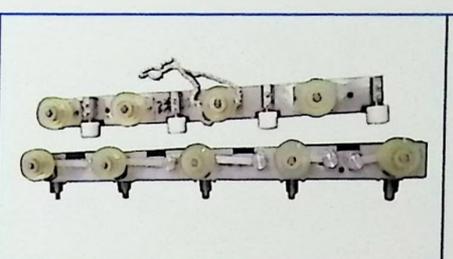


YG-101 特能清洗机压紧件  
Press parts of cleaning machine

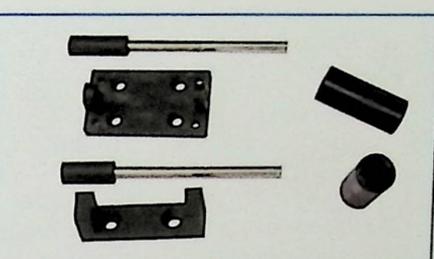


YG-102 定位杆/定位座  
Location bar

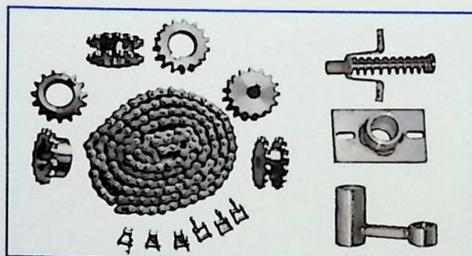

YG-103 特能轴承座/拐臂/  
链齿轮/压紧座+弹簧/链条  
Connecting lever/Bevel gear/Chain

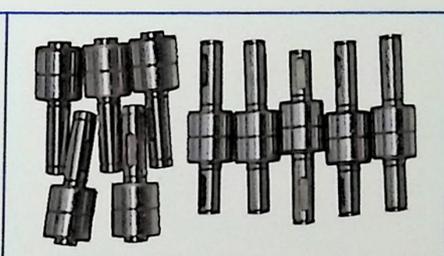


YG-104 特能轴承  
Bearing

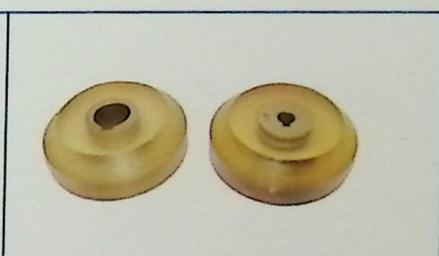


YG-105 特能铜芯轮  
Tenon Hollow copper core wheel  
100\*30\*25/12,70\*30\*25/12



YG-106 韩江小油缸  
Hanjiang small oil cylinder

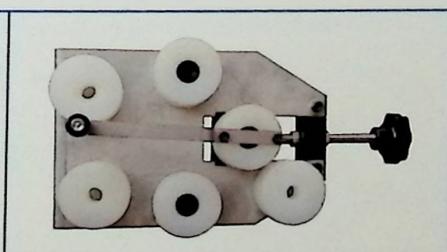

YG-107 普通圆弧折弯机  
Bending machine

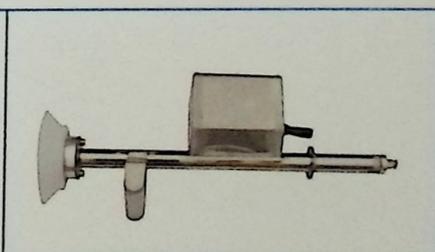


YG-108 下片机吸盘设备  
Powerful electromagnetic chuck




YG-109 韩江摆动马达  
 Swing motor




YG-110 韩江十字转向机  
 Steering gear

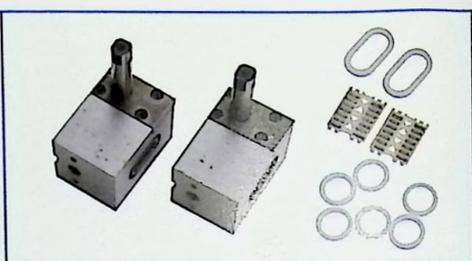

YG-111 韩江自动点胶机胶阀、铜座密封、开关轴密封、滚针排  
 Glue machine valve and seal / Switch shaft seal / Needle row

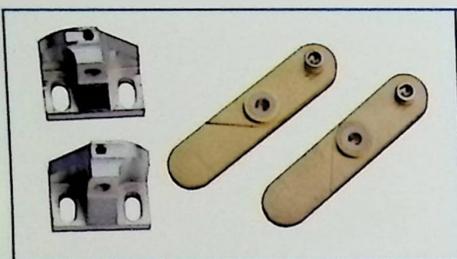


YG-112 韩江铜制胶嘴/不锈钢胶嘴  
 Hanjiang glue nozzle(Copper/stainless)

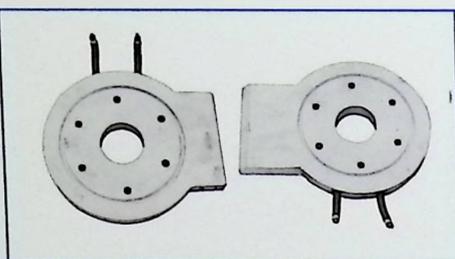


YG-113 韩江加热盘  
 手动/自动  
 Hanjiang heating plate



YG-114 蓝天新海胶盘密封  
 Rubber disc seal

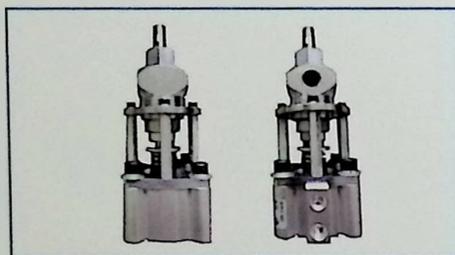


YG-115 蓝天新海气动阀  
 Pneumatic valve

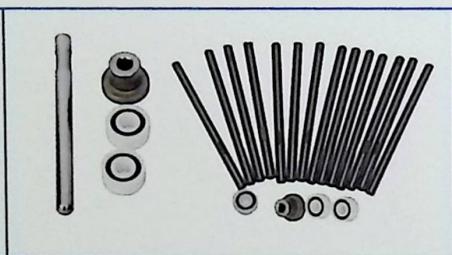


YG-116 蓝天新海/明日之星  
 封针/阀座/密封  
 Needle / seat / seal




YG-117 蓝天新海/明日之星  
 单向阀1寸/四分之三/八分之三  
 Check valve

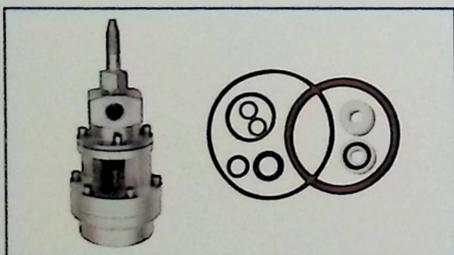

YG-118 明日之星气动阀  
 Pneumatic Valve

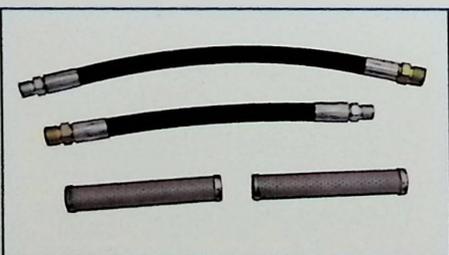


YG-119 明日之星黑胶管/过滤网  
 Black hose / filter

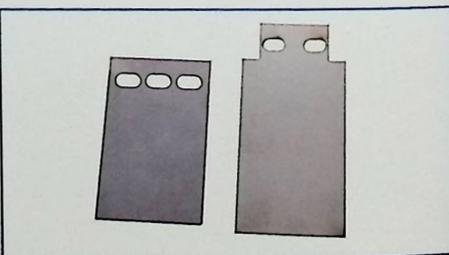


YG-120 明日之星刮胶板  
 Scraping rubber sheet




YG-121 明日之星尼龙内套+芯  
Nylon inner sleeve + core

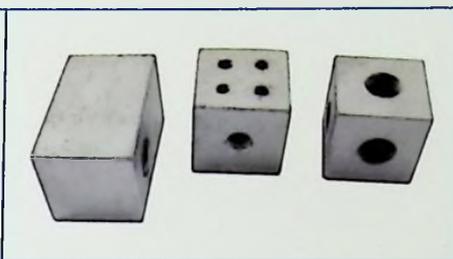

YG-122 明日之星三通块  
Tee block

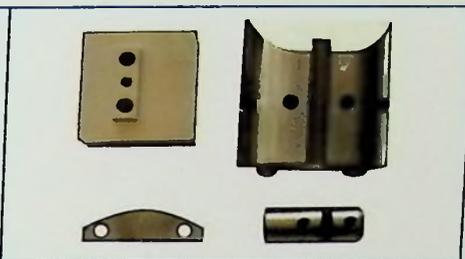


YG-123 明日之星三玻两腔胶嘴  
Automatic glue nozzle  
6A/9A/12A

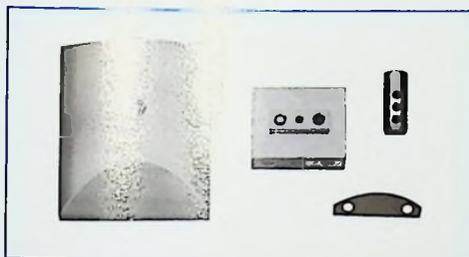


YG-124 明日之星自动胶嘴  
Automatic glue nozzle




YG-125 明日大/小胶盘密封  
Rubber disc seal  
570\*434\*8

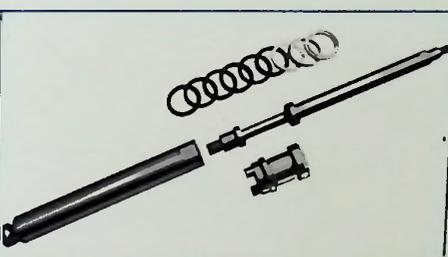


YG-126 明日之星抽胶泵  
Piston rod

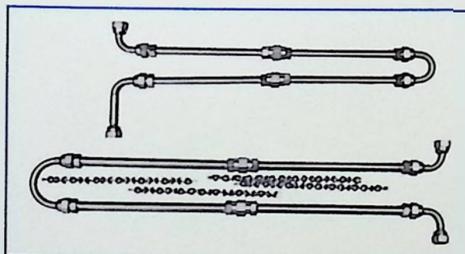


YG-127 明日之星U型混胶器  
Glue mixer device

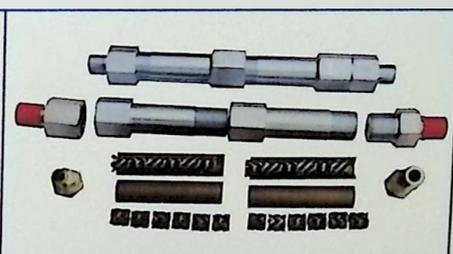


YG-128 明日之星直筒混胶器  
Straight cylinder mixer

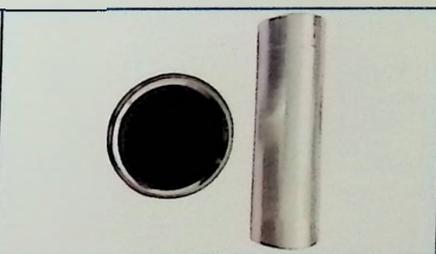


YG-129 明日之星钢筒  
Cylinder Tube  
180\*55\*45

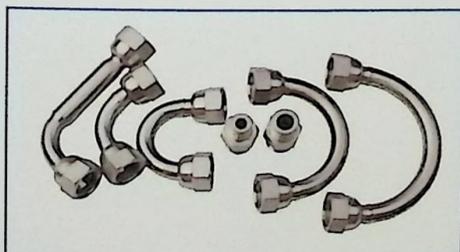


YG-130 明日之星混胶器弯头  
Bending joint of glue mixer

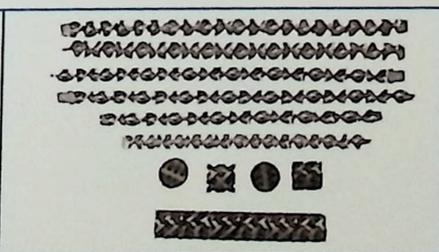


YG-131 混胶芯  
Glue mixer core  
240\*11.3\*13/102\*17\*6/17\*17\*1

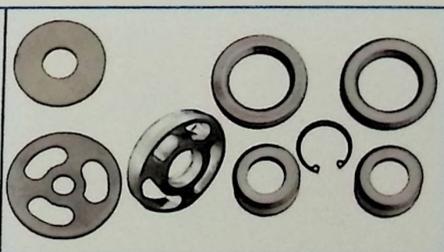


YG-132 明日之星法兰、法板、  
芯阀、胶泵密封器、压环  
Flange, method plate, Core valve,  
ubber pump sealer and pressure ring

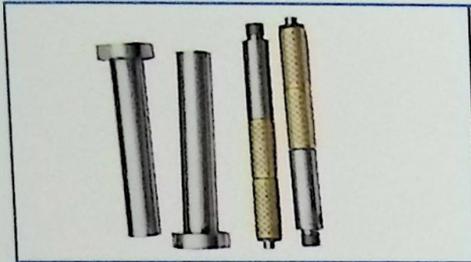


YG-133 明日之星直线刮板轴承  
Bearing

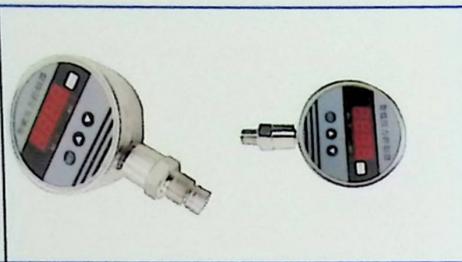


YG-134 明日之星压力表  
Pressure gauge

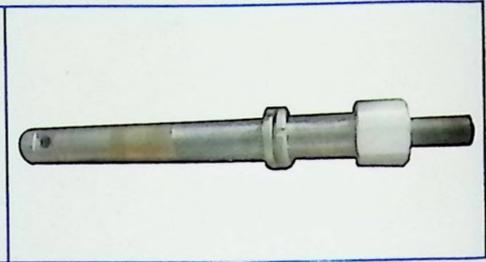


YG-135 明日之星配比泵  
Proportioning pump

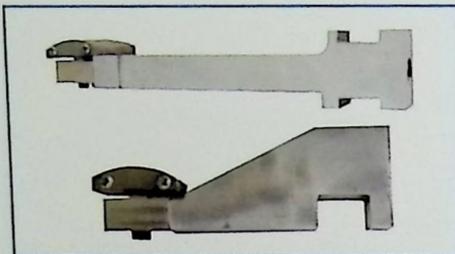


YG-136 明日之星胶嘴总成  
Rubber mouth

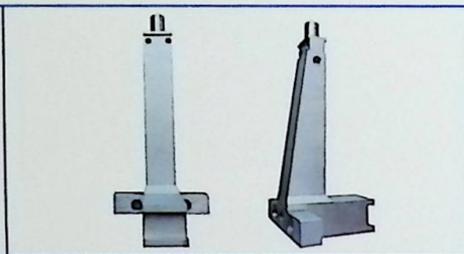


YG-137 蓝天新海胶嘴总成  
Rubber mouth

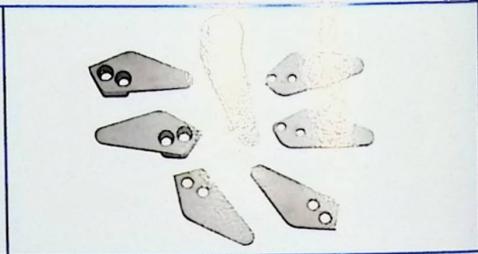


YG-138 扫描尺  
Scanning encoder

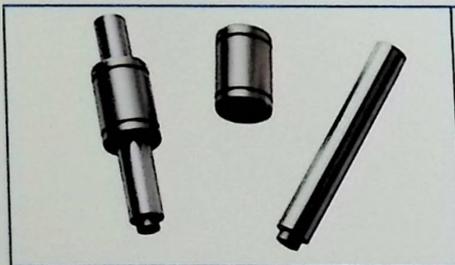


YG-139 明日之星小刮板轴承  
Small scraper bearing

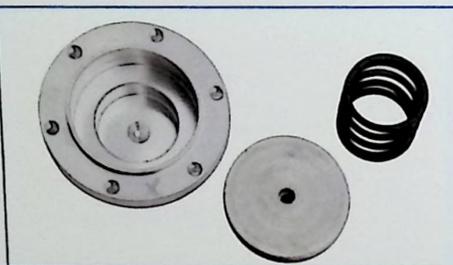

YG-140 明日之星气动阀底座、  
底盘、弹簧  
Pneumatic valve base, Chassis, spring

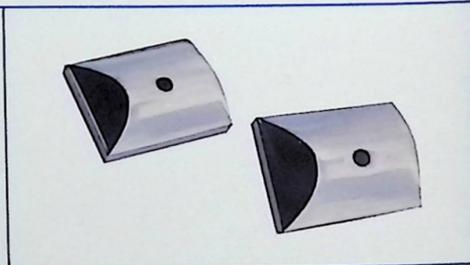

YG-141 明日之星光面胶嘴  
40\*50  
Smooth rubber nozzle

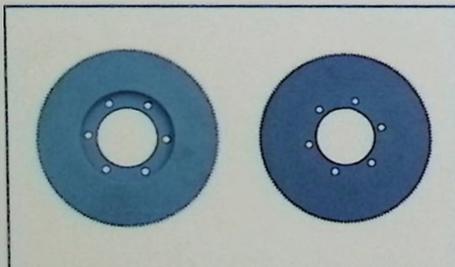


YG-142 明日之星齿轮盘  
Disk gear



YG-143 明日之星编码器  
Encoder




YG-144 电位器  
Potentiometer  
J40S1000/2000Ω

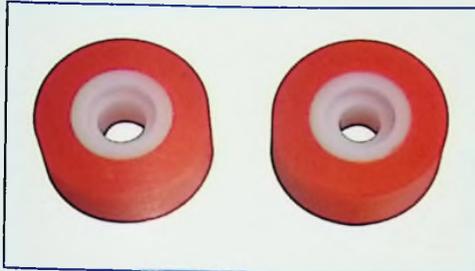

YG-145 清洗机轮

Riding wheel of cleaning machine


52\*30\*12/14

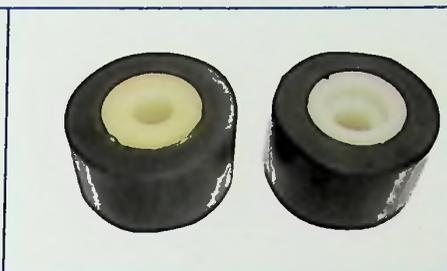

YG-146 清洗机轮

Riding wheel of cleaning machine


52\*30\*12

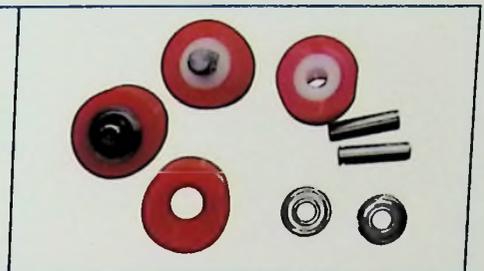

YG-147 清洗机轮

Riding wheel of cleaning machine


40\*24\*10/16

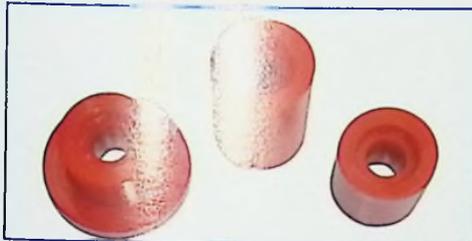

YG-148 特能托轮

Tenon delivery wheel


50\*105\*20/25.50\*70\*25\*20/20台

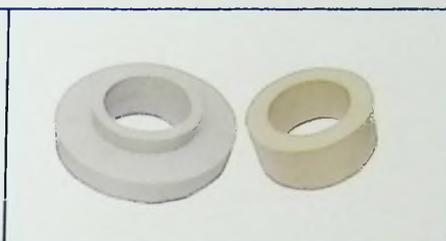

YG-149 清洗机橡胶轮

Rubber wheel of cleaning machine


100/70\*47.5\*30

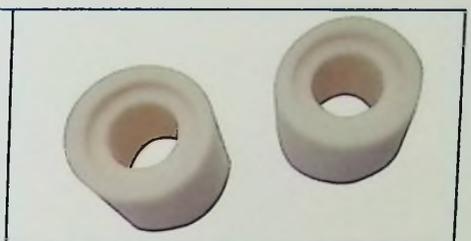

YG-150 特能托轮

Tenon delivery wheel


40\*30\*20

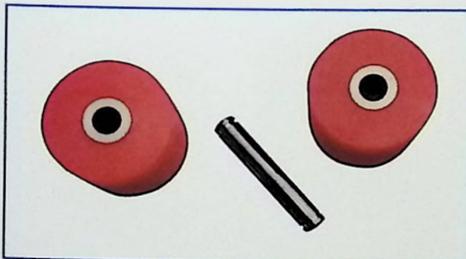

YG-151 托轮

Delivery wheel


38\*8\*30

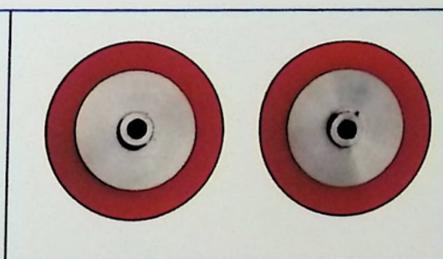

YG-152 锦泰宏威不锈钢芯轮


Stainless steel mandrel

40\*20\*4

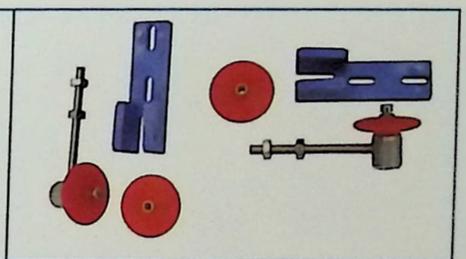

YG-153 特能小铜芯轮带支架


Small copper core with support

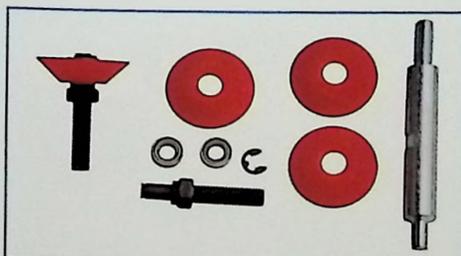

YG-154 特能伞型轮

Tenon Umbrella shape wheel


45\*12\*12

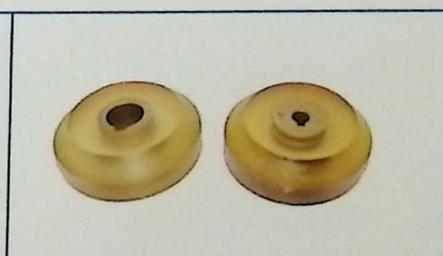

YG-155 特能铜芯轮

Tenon Hollow copper core wheel


100\*30\*25/12,70\*30\*25/12

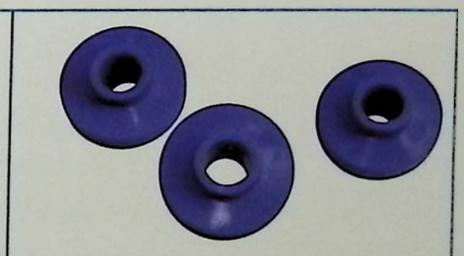

YG-156 蓝色卧磨传动轮

Driving wheel of horizontal mill


72\*20(15)\*25\*25(40)

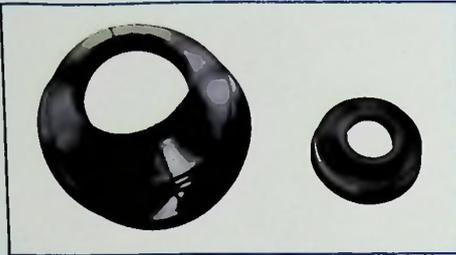


YG-157 防水套  
 Waterproof sleeve  
 65\*30/130\*65




YG-158 李赛克托轮  
 Liseck delivery wheel  
 58\*70/90\*20

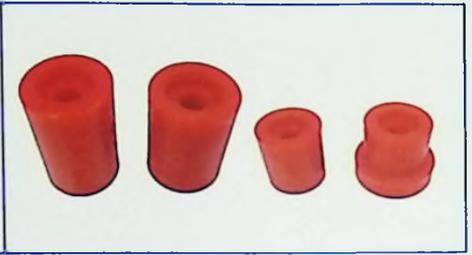


YG-159 韩江托轮  
 Hanjiang delivery wheel  
 65\*90/100\*20/65\*70\*20/20台

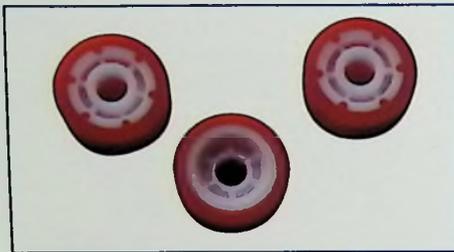


YG-160 磨边机靠轮  
 Backing wheel of edger  
 46\*33\*12\*27

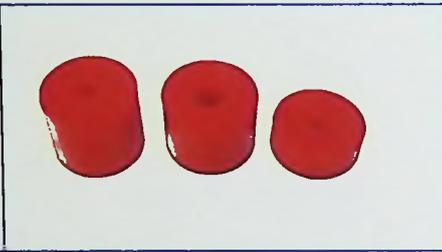


YG-161 韩江清洗机轮  
 Hanjiang Riding wheel of cleaning machine  
 65\*60\*10/65\*50\*20/65\*25\*10

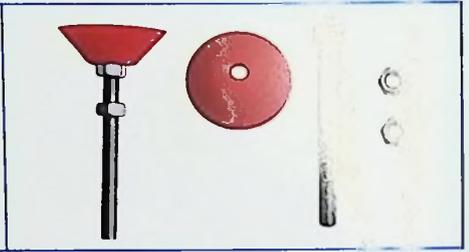


YG-162 韩江半圆轮  
 Hanjiang Semi-round wheel  
 50\*16\*9

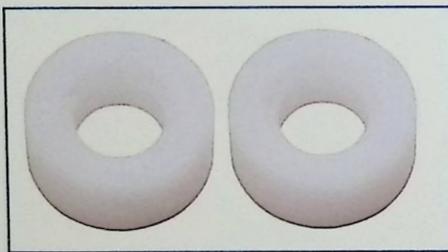


YG-163 韩江压轮  
 Hanjiang pressing wheel  
 40\*20\*19

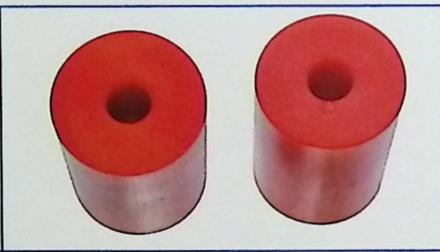


YG-164 托轮  
 Roller  
 55\*90\*16.5

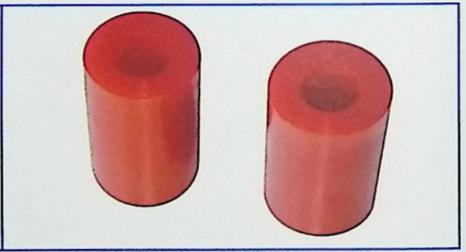


YG-165 韩江托轮  
 Roller  
 40\*70/75\*20

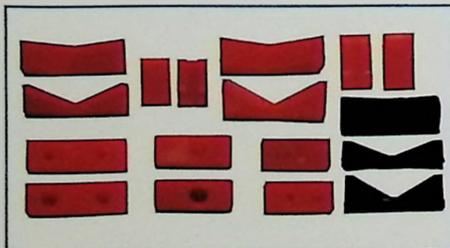



YG-166 托块/V型块/推皮  
 Bracket block/V shape pushing belt

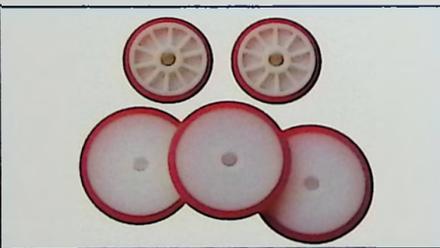

YG-167 昌益和靠轮  
 Polyurethane wheel  
 46.6\*11\*8/60\*11\*8

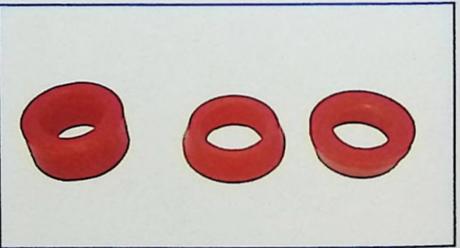

YG-168 聚氨酯轮  
 Polyurethane wheel  
 50\*25\*32\*28  
 50\*16\*32\*28

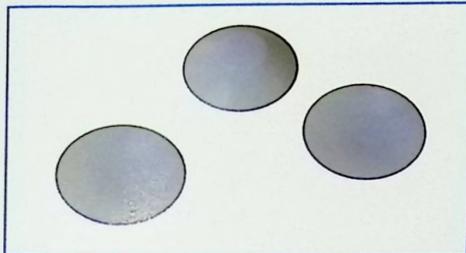

YG-169 高温隔离垫


High temperature isolation pad



YG-170 聚氨酯轮

Polyurethane wheel


40\*35\*24/24台

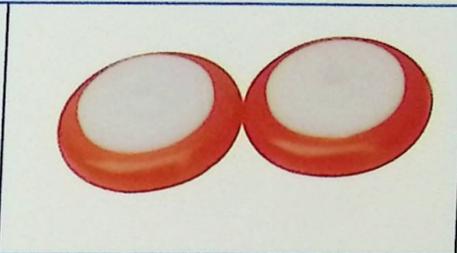

YG-171 尼龙压轮

Nylon pressing wheel


34\*18\*7

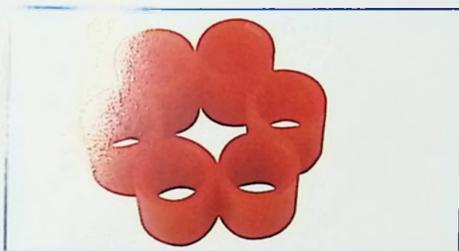

YG-172 小红筒

thumbwheels


30\*25\*17

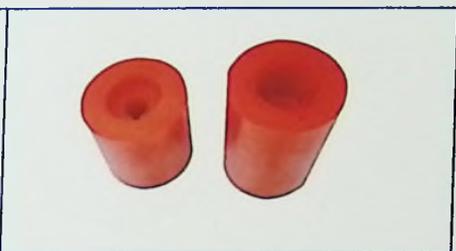

YG-173 托轮带键槽


Polyurethane wheel

65\*70/90\*16

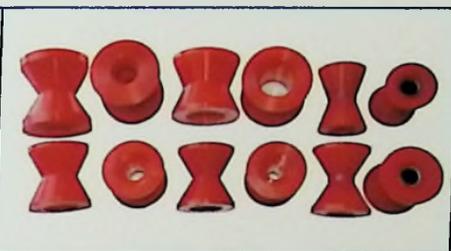

YG-174 密封胶线托轮


Auxiliary wheel

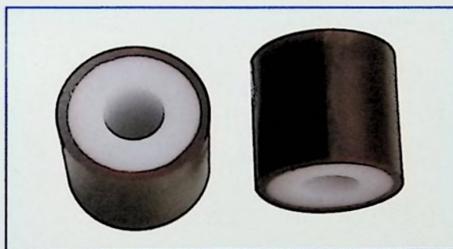

YG-175 百超托轮

Bystronic delivery wheel


50\*50\*20

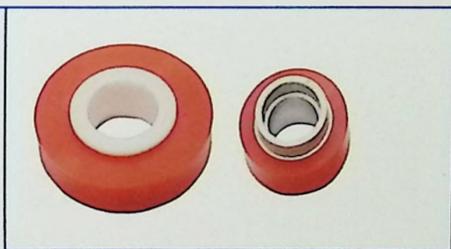

YG-176 百超清洗机轮

Bystronic riding wheel of cleaning machine


50\*23\*32/30\*20\*14

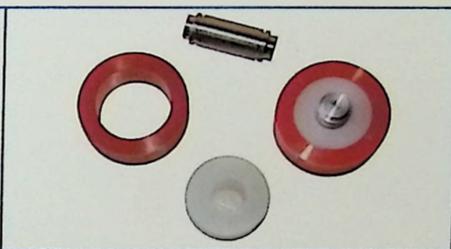

YG-177 正通达托轮

Roller


50\*27\*15

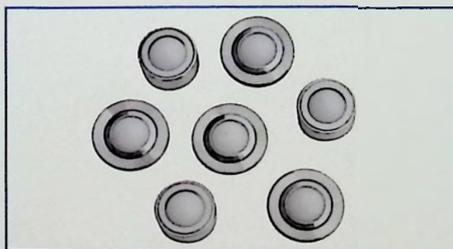

YG-178 小白球带沿/不带沿

Bulleye wheel


50\*27\*15

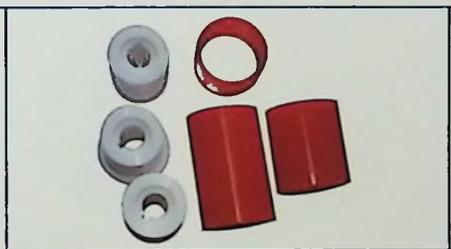

YG-179 正通达托轮/外皮

Roller / skin


50\*80\*20/50\*100\*20/55\*75\*45

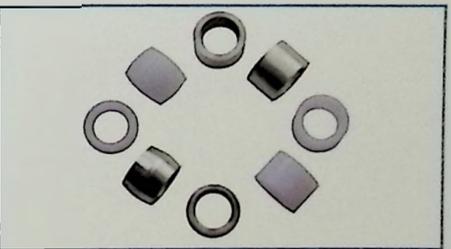

YG-180 特能丁基压轮尼龙/铝制 平/凸

Pressing wheel


30\*20\*18

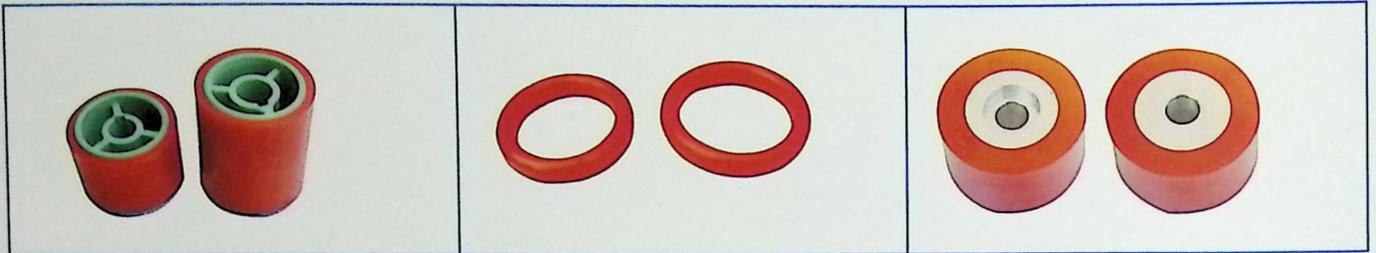

YG-181 玻科托轮  
 Boke delivery wheel  
 65\*50/80\*20

YG-182 O型圈  
 O-rings  
 55\*75\*14/50\*70\*14


YG-183 铝心轮  
 aluminum core wheel  
 52\*35\*20

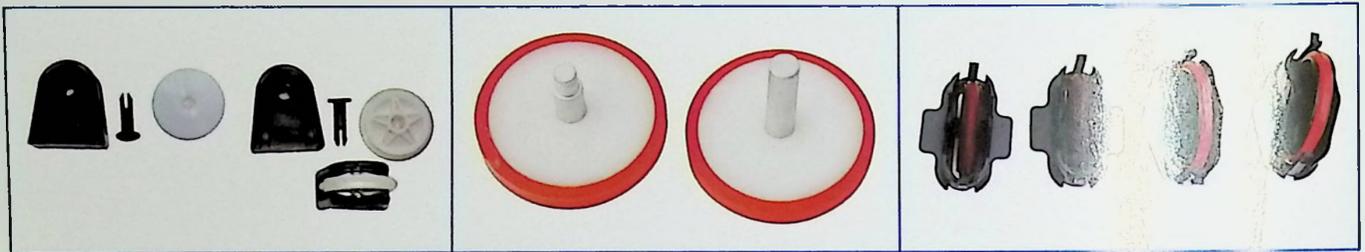

YG-184 韩江靠轮/无痕  
 Backing wheel/Traceless  
 45\*14\*8

YG-185 百超靠轮  
 Bystronic polyurethane wheel  
 51\*10\*8


YG-186 精工之星靠轮  
 MGM Polyurethane wheel  
 21厚/23厚

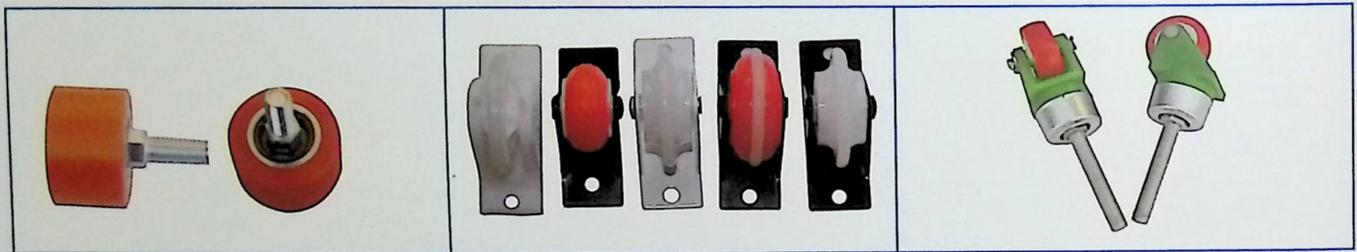

YG-187 亿海靠轮  
 Polyurethane wheel  
 41\*26\*10

YG-188 特能靠轮  
 Tenon Polyurethane wheel  
 H6\*孔距63/50

YG-189 万向轮  
 Universal wheel

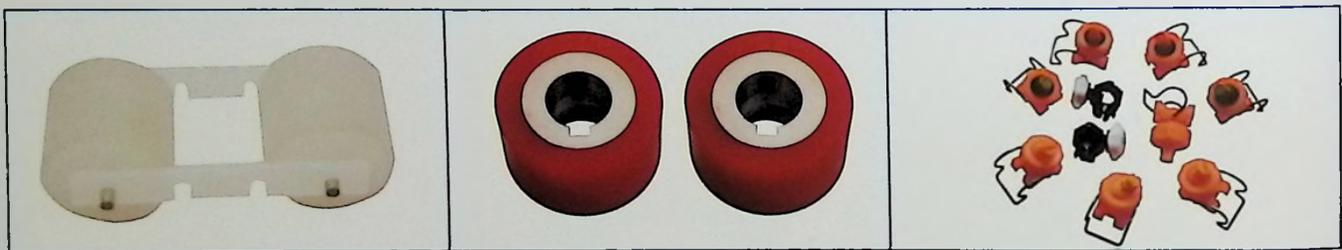

YG-190 磨边机轮  
 The wheel of Edger  
 27\*24\*3

YG-191 高力威铝芯轮  
 Aluminum mandrel  
 50\*32\*20


YG-192 特能/韩江/百超/李赛克清洗机水嘴  
 Tenon/Hanjiang/Bystronic/Lisec water taps  
 直径25/32/40




YG-193 明日之星/白胶泵密封  
 MGM sealing ring




YG-194 明日之星配比泵老式/新式密封  
 MGM Auxiliary pump seal(Old/New)

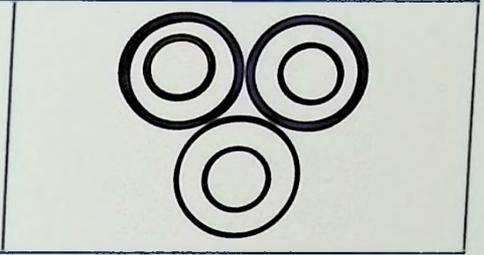


YG-195 明日之星油泵密封  
 MGM Oil pump seal

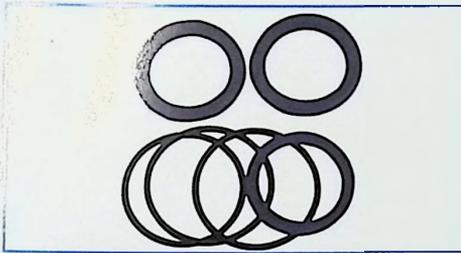


YG-196 明日油杯密封  
 MGM oil cup seal

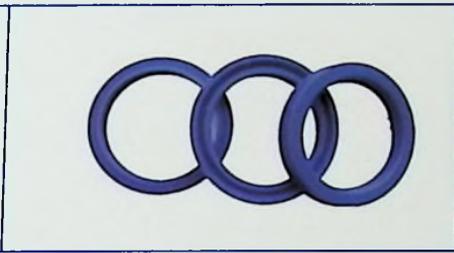


YG-197 明日油碗密封  
 Bowl of oil seal MGM

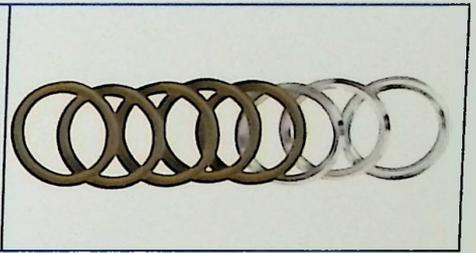


YG-198 明日抽胶泵密封  
 MGM hydrodynamic piston shaft sealing

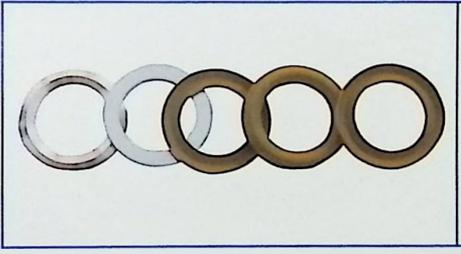


YG-199 明日芯阀密封  
 MGM core valve seal

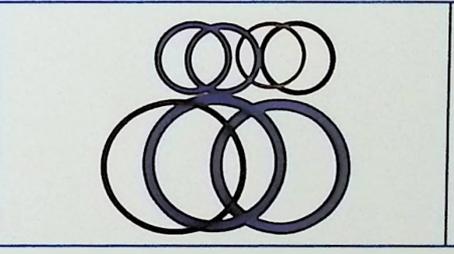


YG-200 明日白胶配比泵密封  
 MGM seal ring

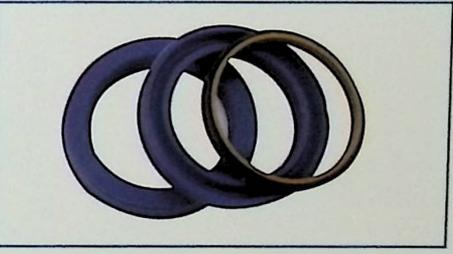


YG-201 明日白胶配比泵密封  
 MGM auxiliary pump seal

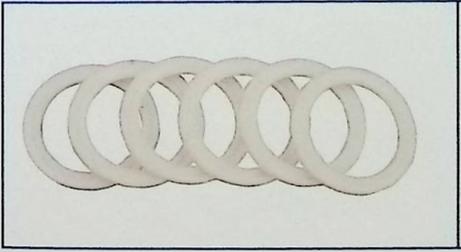


YG-202 昌益和白胶泵上密封  
 CYH Main pump on seal  
 50\*37\*5

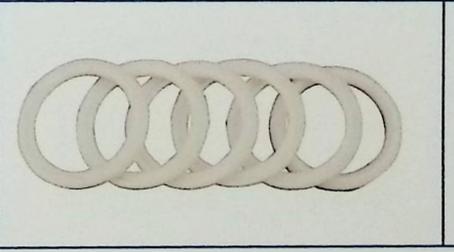


YG-203 昌益和白胶泵下密封  
 CYH Main pump under seal  
 50\*38\*5

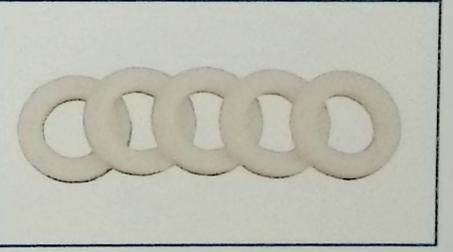


YG-204 昌益和配比泵下密封  
 CYH auxiliary pump on seal  
 26\*13\*5.6

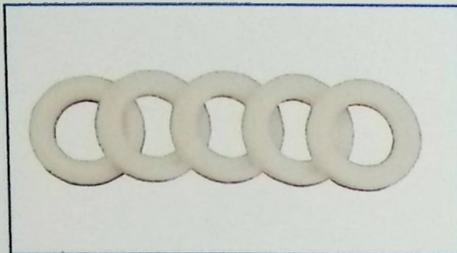


YG-205 昌益和配比泵上密封  
 CYH auxiliary pump under seal  
 30\*18\*5.6

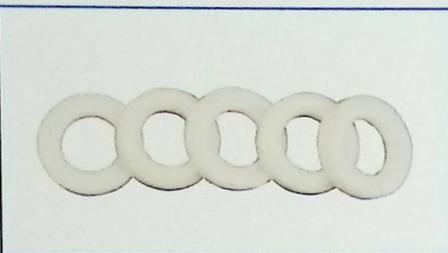

YG-206 昌益和芯阀密封  
 CYH core valve seal  
 28\*16\*5

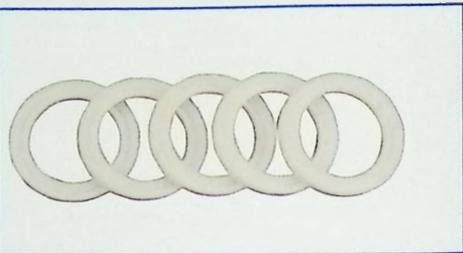


YG-207 昌益和辅料泵密封  
 CYH auxiliary pump seal  
 40\*23\*5.8

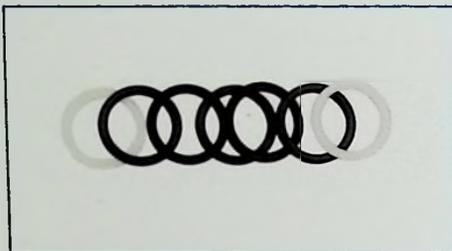

YG-208 蓝天新海小活塞密封  
 LTXH piston sealing



YG-209 蓝天新海油杯密封  
 LTXH oil cup seal

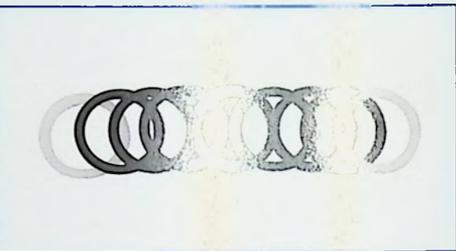


YG-210 蓝天新海活塞密封  
 LTXH hydrodynamic piston shaft sealing




YG-211 蓝天新海配比泵密封  
 LTXH auxiliary pump seal




YG-212 蓝天新海主泵密封  
 LTXH main pump seal

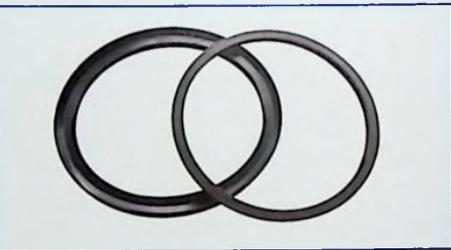


YG-213 特能丁基胶机密封  
 Tenon butyl gum seal

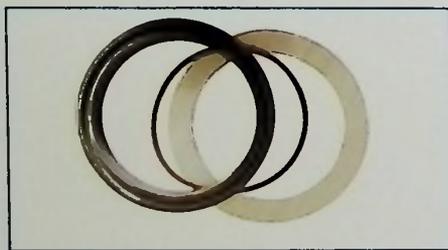


YG-214 韩江丁基胶机密封  
 Hanjiang butyl gum seal

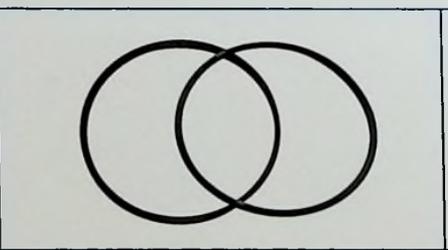

YG-215 百超丁基胶机密封  
 Bystronic Butyl gum seal

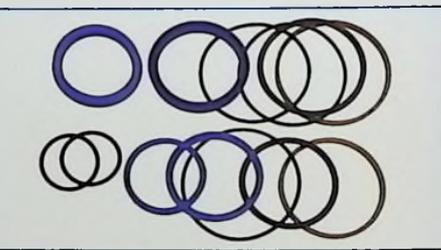

YG-216 特能丁基胶机大油缸密封  
 Cylinder packing

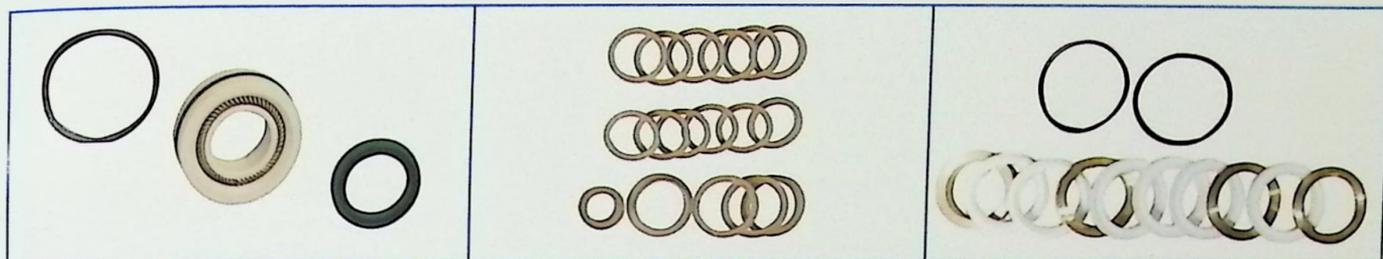

YG-217 百超自动打胶机密封 YG-218 百超自动打胶机密封

Bystronic seal

Bystronic seal

YG-219 李赛克密封

Liseck seal



YG-220 李赛克密封

Liseck seal

YG-221 李赛克密封

Liseck seal

YG-222 博驰刀头、夹具、逗号

Cutter head, fixture



YG-223 手提式氩气充气机


Portable argon inflator

YG-224 推拉式氩气充气机

Push pull argon inflator

YG-225 驱动电池3.6V

Driving battery

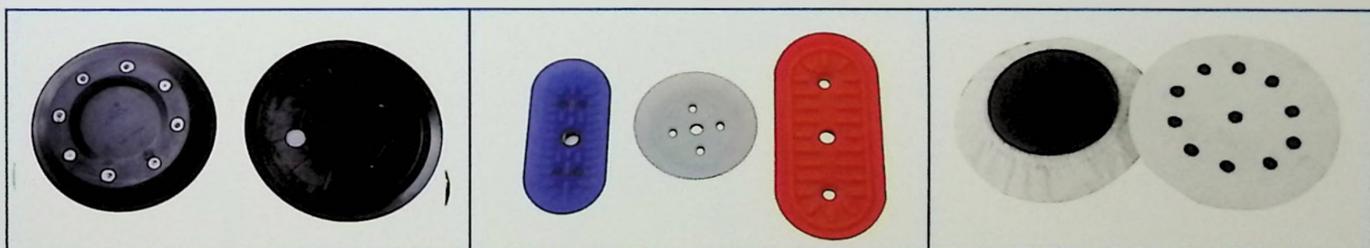

YG-226 吸盘

Suction cups

直径250

YG-227 吸盘

Suction cups


直径100/140\*70\*20/190\*90\*20

YG-228 吸盘套


Dirt-proof boot




YG-229 万向水嘴  
Universal water taps

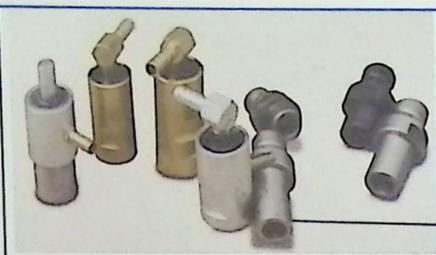

YG-230 机钻水嘴  
Drill water taps

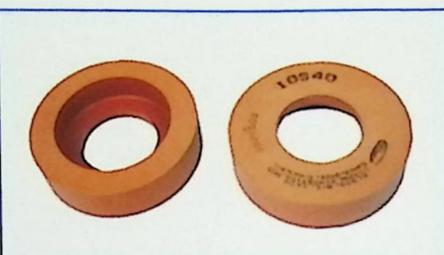

YG-231 抛光轮  
Polishing wheel

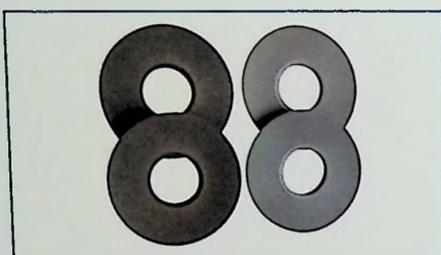


YG-232 除膜轮  
Film removing wheel



YG-233 电动除膜机  
Electric manual film removal machine




YG-234 气动除膜机  
Pneumatic film removal machine

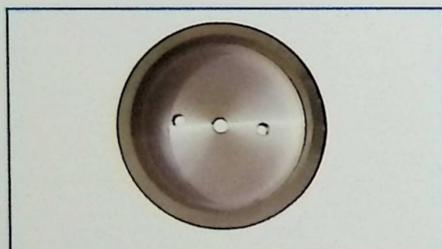

YG-235 树脂轮  
Resin wheel



YG-236 杯形树脂轮  
Cup shaped resin wheel

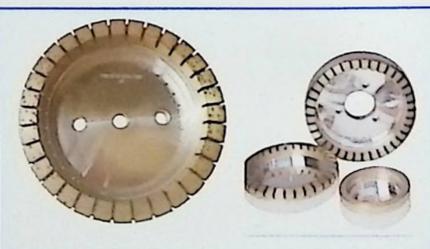


YG-237 全齿金刚轮  
Full-gear diamond wheel



YG-238 四边磨金刚轮  
Four side grinding wheel




YG-239 四边磨树脂轮  
Resin wheel

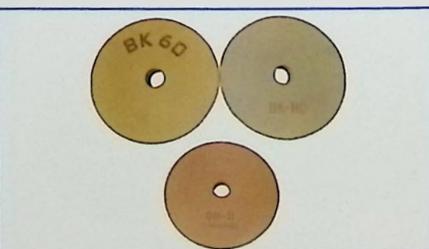


YG-240 平行BK抛光轮  
BD Polishing wheel




YG-241 玻璃钻头  
Glass bit

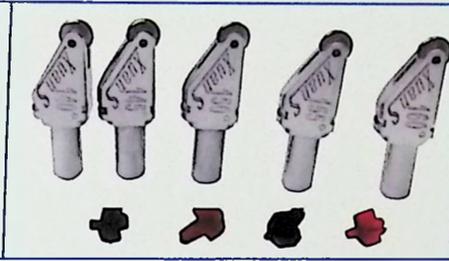


YG-242 切割机刀头  
Cutter head

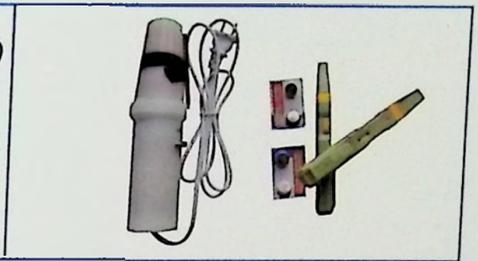


YG-243 LOW-E笔/氩气检测笔  
Detects pen

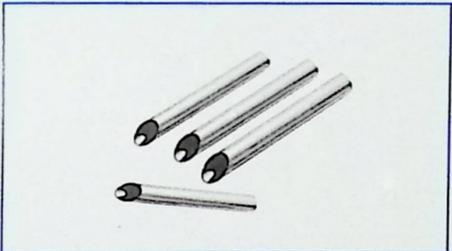

YG-244 中空毛细管  
Supercapillary

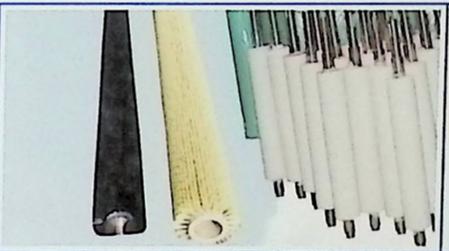

YG-245 清洗机胶辊毛刷  
Rubber roller brush of cleaning machine

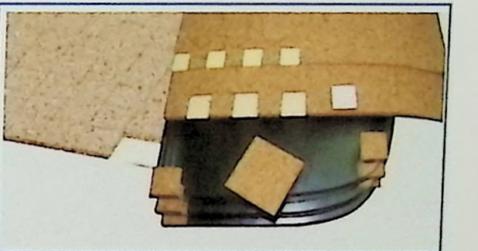


YG-246 软木垫  
Cork cushion




YG-247 防割手套/袖套  
Cut resistant gloves / sleeves




YG-248 保特罗气囊  
Airbags

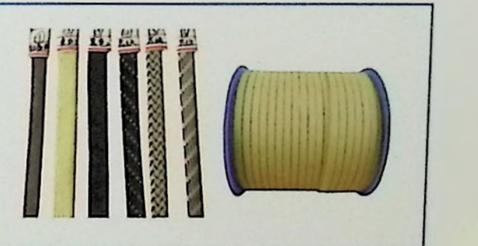


YG-249 高温绳  
High temperature rope

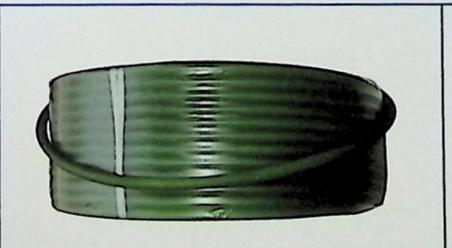


YG-250 钢化PU带(开口/无缝)  
PU Round Belts(Open/seamless)

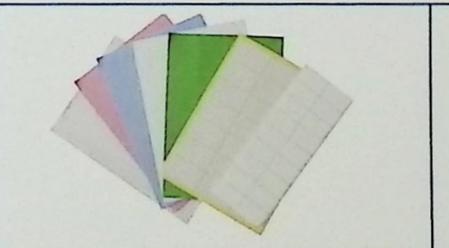

YG-251 防水标签  
Swimpruf hang tag

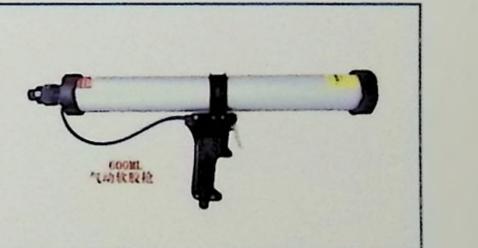

YG-252 气动胶枪  
Teroson statu

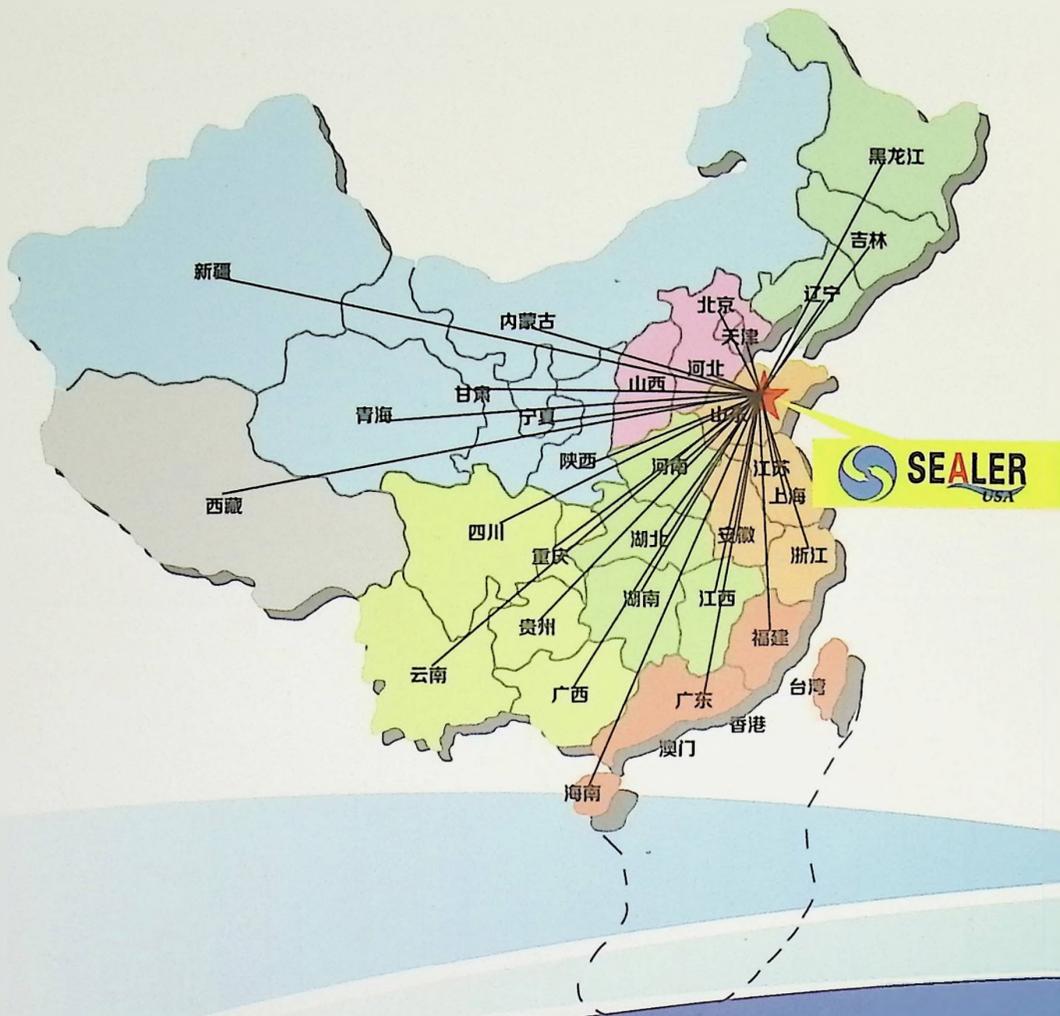

## 威海宇光施尔乐密封材料有限公司

电话：15336301166 传真：0631-5285857

威海：18162003888 18162003887

邮箱：15336301166@163.com

网址：<http://www.whygsealer.com>

地址：山东省威海市环翠区

技术服务电话：18963169977 13333072808